



Approved by:
Checked by:
Issued by:

SPECIFICATION

PRODUCT: NPN 2.4GHz wideband transistor

MODEL: MAR3120 SOT23

HOPE MICROELECTRONICS CO.,LIMITED

MAR3120

The item can replace **2SC3120**

DESCRIPTION

The MAR3120 is an NPN silicon epitaxial transistor designed for low noise amplifier at VHF, UHF and CATV band .


It has large dynamic range and good current characteristic.

FEATURES


MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V _{CB0}	30	V
Collector-Emitter Voltage	V _{CEO}	15	V
Emitter-Base Voltage	V _{EB0}	3	V
Collector Current	I _C	50	mA
Base Current	I _B	25	mA
Collector Power Dissipation	P _C	150	mW
Junction Temperature	T _j	125	°C
Storage Temperature Range	T _{stg}	-55~125	°C

Marking




Unit in mm

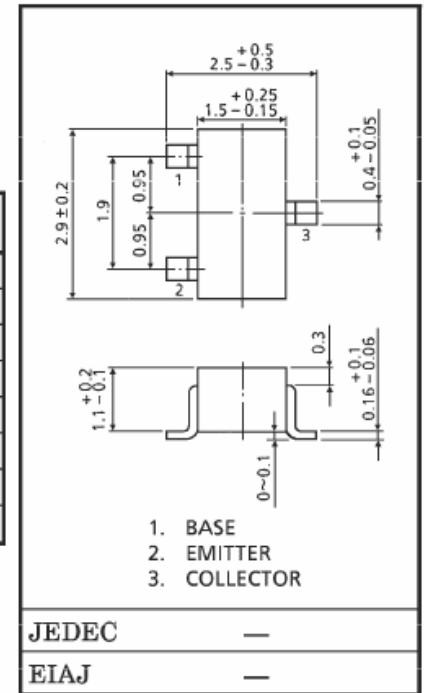



ELECTRICAL CHARACTERISTICS (Ta = 25°C)





CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I _{CB0}	V _{CB} = 30V, I _E = 0	—	—	0.1	μA
Emitter Cut-off Current	I _{EB0}	V _{EB} = 2V, I _C = 0	—	—	1.0	μA
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C = 1mA, I _B = 0	15	—	—	V
DC Current Gain	h _{FE}	V _{CE} = 10V, I _C = 5mA	40	100	200	—
Reverse Transfer Capacitance	C _{re}	V _{CB} = 10V, I _E = 0, f = 1MHz	—	0.6	0.9	pF
Transition Frequency	f _T	V _{CE} = 10V, I _C = 2mA	1500	2400	—	MHz
Conversion Gain	G _{ce}	V _{CC} = 10V, I _C = 2mA, f = 800MHz,	12	17	—	dB
Noise Figure	NF	f _L = 830MHz (0dBm) (Fig.1)	—	8	—	dB

Fig.1 800MHz G_{ce} , NF TEST CIRCUIT

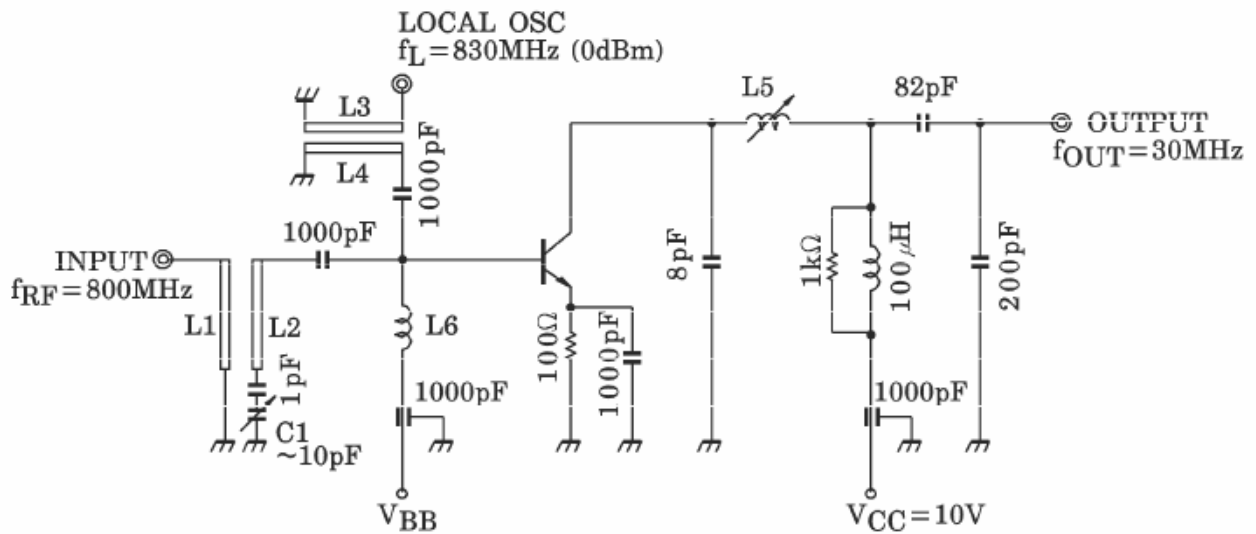

- L1~L4 : ϕ 0.8mm SILVER PLATED COPPER WIRE
- L5 : AIR COIL SCN-5948 ① - ③ TOKO OR EQUIVALENT
- L6 : ϕ 0.2mm COPPER WIRE 10T 5mm ID
- C1 : AIR TRIMMER TTA23A100 MURATA MFC. Co., LTD. OR EQUIVALENT

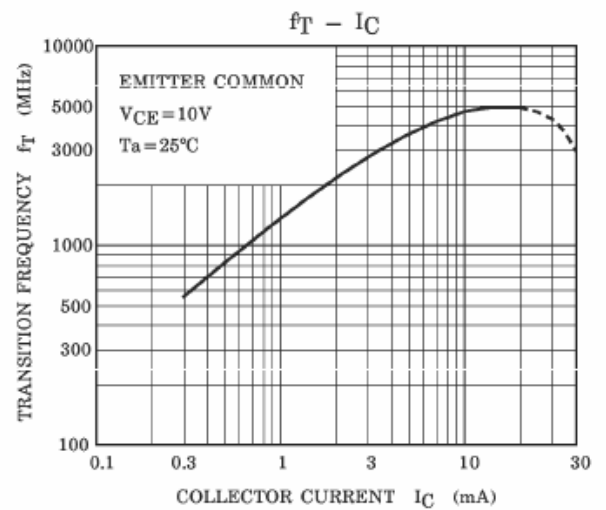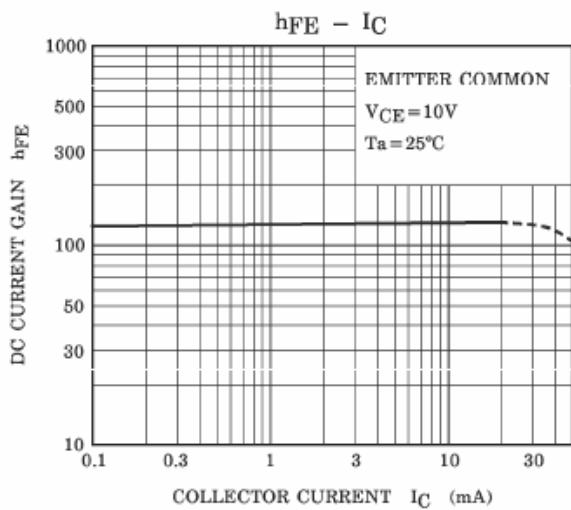

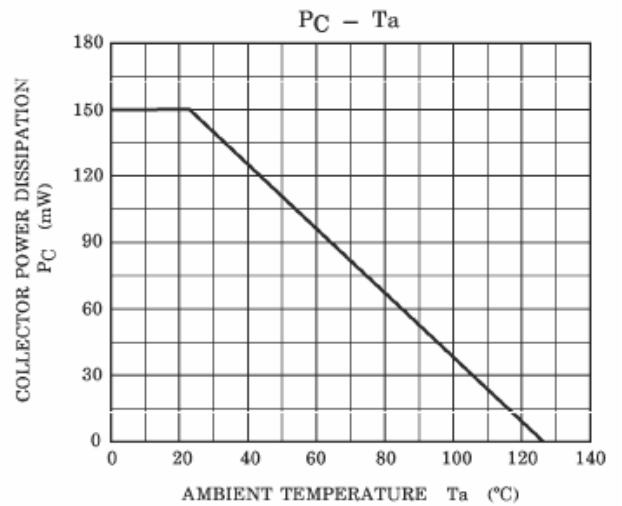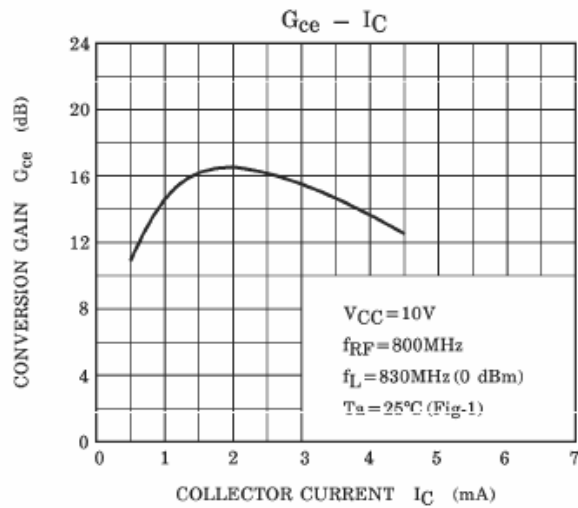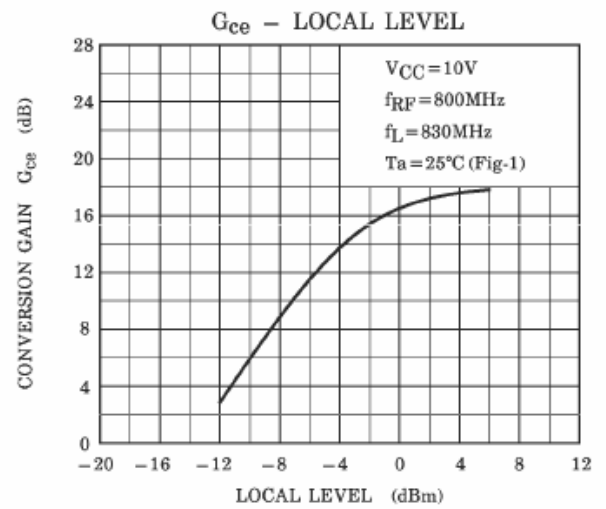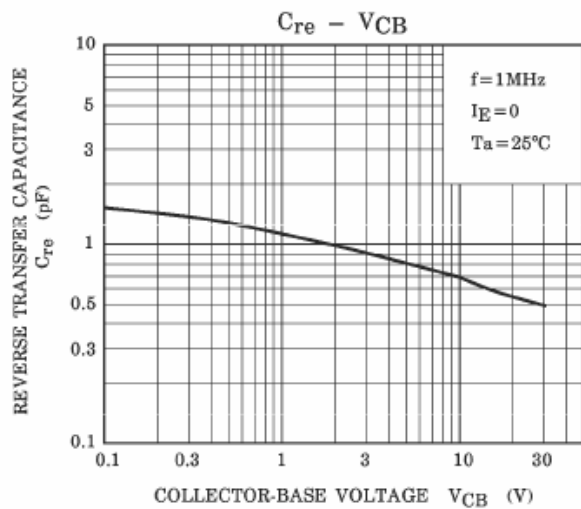

Notice:

Thank you very much for your favors and patronage to our semiconductor products. We are making an effort to eliminate lead (Pb) compound by considering its influence on our environment, and plan to implement lead free terminal (complete exclusion of Pb) for our discrete semiconductor products.