


## 6700 Series Thermostats

### 6700 P.C. Board Thermostat



The Airpax Series 6700 is a miniature bimetallic snap acting thermostat which provides accurate and reliable sensing

and switching in a single device. Primarily developed for thermal management applications on power supplies, the Series 6700 is also ideally suited for use on crowded P.C. boards. It provides fast, positive response and excellent repeatability with 1 amp switching capability at 48 VDC over its operating temperature range of 40°C to 110°C (104°F to 230°F). The operating temperature is pre-set at the factory and is non-adjustable in the field.

The single pole/single throw switch assembly features a bimetallic element that is rated 100,000 cycles at 5 VDC 20 mA resistive or in excess of 1,000,000 operations mechanically. This unit features a positive snap action, available in either normally closed, open on rising temperature or normally open, close on rising temperature.

The 6700 thermostat dimensionally conforms to the international product package standard Y220/T0220. Thus, the 6700 may be automatically placed and soldered onto P.C. boards with high speed automated equipment, eliminating the need for the expensive hand placement and termination required today for most power supply thermostats.

The nickel-plated copper mounting bracket allows this device to be directly mounted to the heat sink to

sense an over-temperature condition caused by other components mounted close by or insufficient cooling due to external conditions.

Typical uses include turning on an indicator light, sounding an audible alarm, switching on a control circuit to send a message to a display screen or even switching a circuit to shut down a system. Applications include computers and computer peripherals, aircraft, automotive, and test equipment.

### Specifications:

**Contact Resistance:** 50 Milliohms max. (before and after rated life)

### Contact Ratings:



Cycles	Voltage	Amps (Resistive)
30,000	48 VDC	1
30,000	120 VAC	1
100,000	5 VDC	.020
100,000	5 VDC	.001


**Contact Operations:** Either open on rise or close on rise

**Operating Temperature Range:** 40°C (104°F) to 110°C (230°F)

**Standard Operating Temperature Tolerance:** ±5°C (±9°F) Nominal operating temperature settings in 5°C (9°F) increments

**US Patent No:** 4,795,997

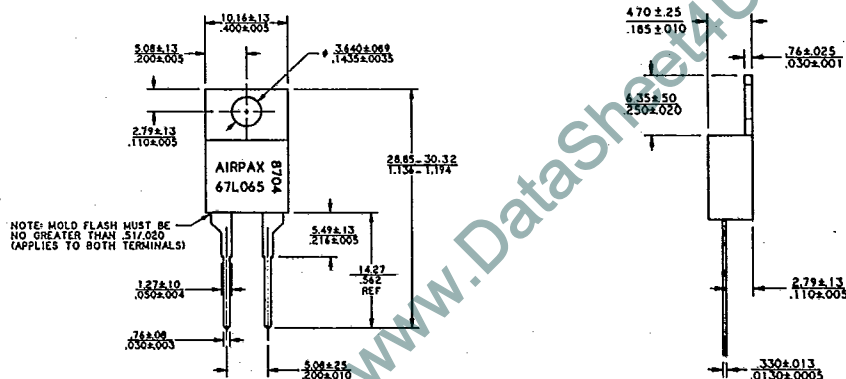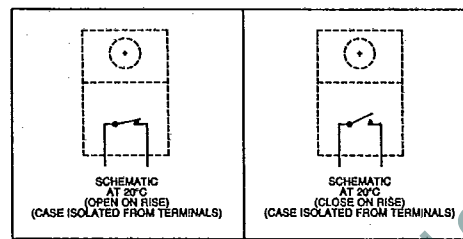

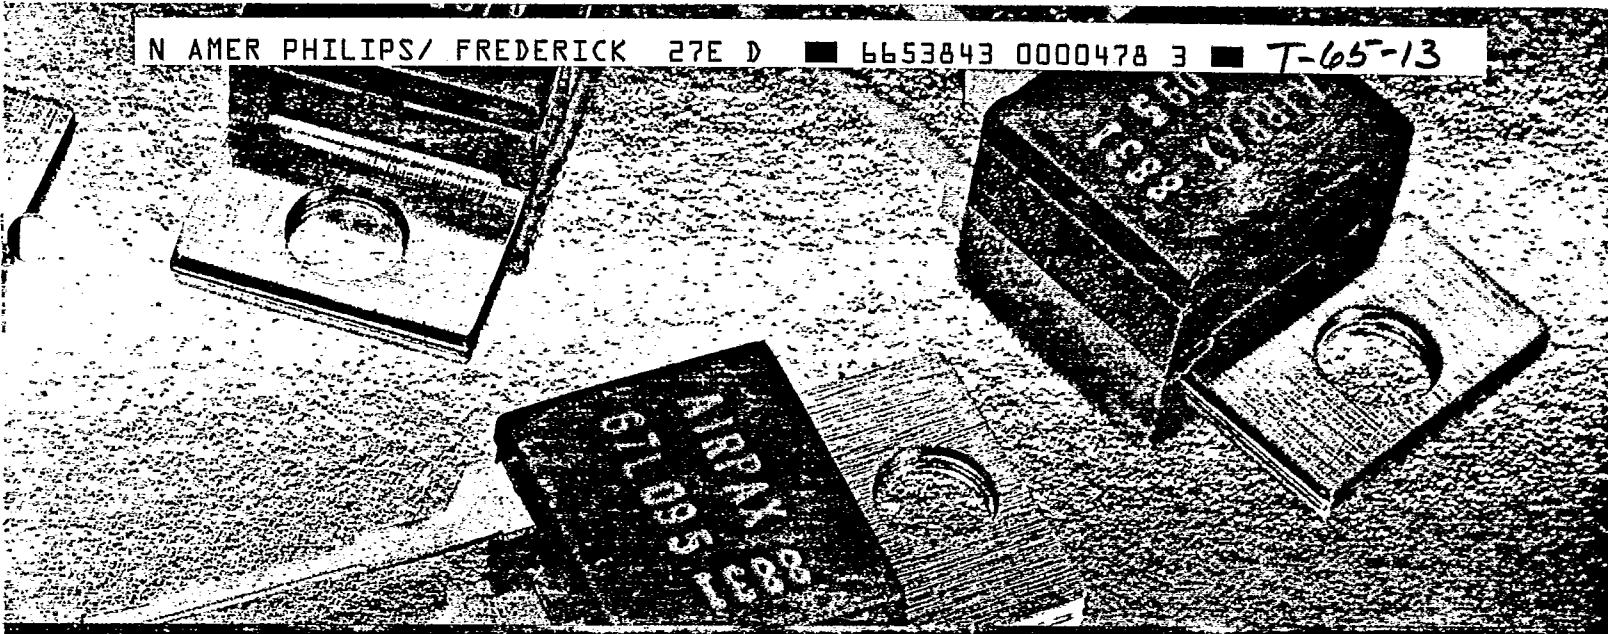

## 6700 Series Thermostats

**Short Term Exposure Limit:**  
260°C (500°F), 10 sec.

**Long Term Exposure Limit:**  
-55°C (-67°F) to 160°C (320°F)

**Dielectric Strength:** 1480 VAC 60 Hz,  
1 second terminals to case

**Insulation Resistance:** 100 Megohms  
at 500 VDC

**Contact Bounce - make:** 3 ms max.

**Weight:** Approximately 0.5 grams

**Seal:** Epoxy sealed for wave soldering  
and cleaning. Moisture proof per Airpax  
Spec. S-722 (unit will not leak while  
submerged in 9" of water for a minimum  
of two minutes).

**Vibration:** Per Mil-Std-202,  
Method 204D, Test Condition D,  
10-2,000 Hz.

**Shock:** Per Mil-Std-202, Method 213,  
Test Condition C, 100 G's, 6 milliseconds,  
½ sine wave.

**Humidity:** Moisture resistant per  
Mil-Std-202F, Method 106E.

**Chemical Resistance:** Unit is resistant  
to water, salt, alcohol, ammonia,  
trichlorethane, and most other organic  
solvents.

**Solderability:** Terminal material is  
selectively striped with 60/40 solder for  
improved solderability.

**Resistance to Soldering Heat:**  
Per Mil-Std-202F, Method 210A,  
Test Condition E.

**Mechanical Life:** 1,000,000 operations.

**UL & CSA File Numbers:**  
UL Recognized E36687  
CSA Certified LR25561

**Materials:**

**Seal:** High temperature epoxy

**Base:** PPS (Polyphenylene Sulfide),  
94 VO rated

**Terminals:** 65% Copper, 18% Nickel

**Contacts:** Gold-plated Silver cross bar

**Bracket:** Nickel-plated copper


6700 SERIES STANDARD CALIBRATIONS

OPERATE (±5°C)	RESET (MIN °C)	DIFFERENTIAL (MIN °C)
40	20	4
45	20	4
50	30	4
55	30	4
60	40	4
65	40	4
70	50	4
75	50	4
80	55	6
85	55	6
90	60	6
95	60	6
100	70	6
105	70	6
110	80	6

**How to use this chart**

Each thermostat Part Number consists of functional "building blocks" to enable the user to specify clearly and precisely the desired characteristics in each category. Select the proper Code in each category, then transfer it to the box indicated. Unless a special requirement is indicated, the Part Number will be complete when the proper temperature is selected. If you have a special requirement, please call Airpax for a factory assigned number to complete the Part Number.

Example: A 67F060 thermostat will close (make contact) on a rising temperature from 55°C to 65°C and will reset (break contact) on a falling temperature no less than 4°C lower than the actual close temperature and no lower than 40°C actual temperature.

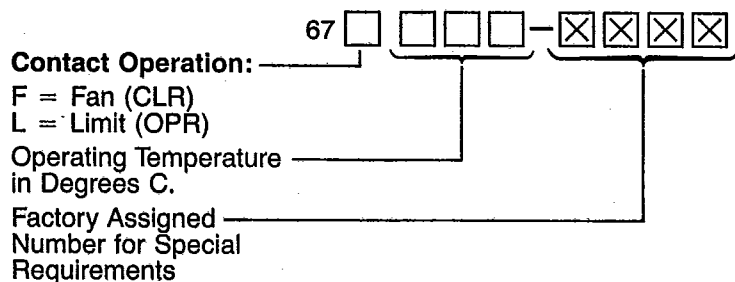

Temperature set point calibration is checked at Airpax with precision test equipment and proven methods. Because customer checking methods may differ, a typical variance allowed for correlation is ±1 degree C.

# TEMPERATURE CONVERSION TABLE

If center column value is °F, the °C equivalent is to the left. If center column value is °C, the °F equivalent is to the right.

°C.		°F.		°C.		°F.		°C.		°F.		°C.		°F.						
-34.44	-30	-22	15.56	60	140	65.56	150	302	115.56	240	464	165.56	330	628	215.56	420	788	267.22	495	923
-33.33	-29	-20.2	16.11	61	141.8	66.11	151	303.8	116.11	241	465.8	166.11	331	627.8	216.11	421	789.8	267.78	496	924.8
-32.22	-28	-18.4	16.67	62	142.8	66.67	152	304.8	116.67	242	466.8	166.67	332	628.8	216.67	422	791.8	268.33	497	926.8
-31.11	-27	-16.8	17.22	63	143.8	67.22	153	305.8	117.22	243	467.8	167.22	333	629.8	217.22	423	793.8	268.89	498	928.8
-30.00	-26	-15.2	17.78	64	144.8	67.78	154	306.8	117.78	244	468.8	167.78	334	630.8	217.78	424	795.8	269.44	499	930.8
-28.89	-25	-13.6	18.33	65	145.8	68.33	155	307.8	118.33	245	469.8	168.33	335	631.8	218.33	425	797.8	270	500	932
-27.78	-24	-12.0	18.89	66	146.8	68.89	156	308.8	118.89	246	470.8	168.89	336	632.8	218.89	426	799.8	270.56	501	933.8
-26.67	-23	-10.4	19.44	67	147.8	69.44	157	309.8	119.44	247	471.8	169.44	337	633.8	219.44	427	800.8	271.11	502	935.8
-25.56	-22	-8.8	20.00	68	148.8	69.99	158	310.8	120.00	248	472.8	170.00	338	634.8	220.00	428	802.8	271.67	503	937.8
-24.44	-21	-7.2	20.56	69	149.8	70.56	159	311.8	120.56	249	473.8	170.56	339	635.8	220.56	429	804.8	272.22	504	939.8
-23.33	-20	-5.6	21.11	70	150.8	71.11	160	312.8	121.11	250	474.8	171.11	340	636.8	221.11	430	806.8	272.78	505	941.8
-22.22	-19	-4.0	21.67	71	151.8	71.67	161	313.8	121.67	251	475.8	171.67	341	637.8	221.67	431	807.8	273.33	506	943.8
-21.11	-18	-2.4	22.22	72	152.8	72.22	162	314.8	122.22	252	476.8	172.22	342	638.8	222.22	432	809.8	273.89	507	945.8
-20.00	-17	-0.8	22.78	73	153.8	72.78	163	315.8	122.78	253	477.8	172.78	343	639.8	222.78	433	811.8	274.44	508	947.8
-18.89	-16	0.8	23.33	74	154.8	73.33	164	316.8	123.33	254	478.8	173.33	344	640.8	223.33	434	813.8	275.00	509	949.8
-17.78	-15	2.4	23.89	75	155.8	73.89	165	317.8	123.89	255	479.8	173.89	345	641.8	223.89	435	815.8	275.56	510	951.8
-16.67	-14	4.0	24.44	76	156.8	74.44	166	318.8	124.44	256	480.8	174.44	346	642.8	224.44	436	816.8	276.11	511	953.8
-15.56	-13	5.6	25.00	77	157.8	75.00	167	319.8	125.00	257	481.8	175.00	347	643.8	225.00	437	817.8	276.67	512	955.8
-14.44	-12	7.2	25.56	78	158.8	75.56	168	320.8	125.56	258	482.8	175.56	348	644.8	225.56	438	818.8	277.22	513	957.8
-13.33	-11	8.8	26.11	79	159.8	76.11	169	321.8	126.11	259	483.8	176.11	349	645.8	226.11	439	820.8	277.78	514	959.8
-12.22	-10	10.4	26.67	80	160.8	76.67	170	322.8	126.67	260	484.8	176.67	350	646.8	226.67	440	822.8	278.33	515	961.8
-11.11	-9	12.0	27.22	81	161.8	77.22	171	323.8	127.22	261	485.8	177.22	351	647.8	227.22	441	823.8	278.89	516	963.8
-10.00	-8	13.6	27.78	82	162.8	77.78	172	324.8	127.78	262	486.8	177.78	352	648.8	227.78	442	825.8	279.44	517	965.8
-9.89	-7	15.2	28.33	83	163.8	78.33	173	325.8	128.33	263	487.8	178.33	353	649.8	228.33	443	826.8	280.00	518	967.8
-8.78	-6	16.8	28.89	84	164.8	78.89	174	326.8	128.89	264	488.8	178.89	354	650.8	228.89	444	827.8	280.56	519	969.8
-7.67	-5	18.4	29.44	85	165.8	79.44	175	327.8	129.44	265	489.8	179.44	355	651.8	229.44	445	828.8	281.11	520	971.8
-6.56	-4	20.0	30.00	86	166.8	79.99	176	328.8	130.00	266	490.8	180.00	356	652.8	230.00	446	830.8	281.67	521	973.8
-5.44	-3	21.6	30.56	87	167.8	80.56	177	329.8	130.56	267	491.8	180.56	357	653.8	230.56	447	831.8	282.22	522	975.8
-4.33	-2	23.2	31.11	88	168.8	81.11	178	330.8	131.11	268	492.8	181.11	358	654.8	231.11	448	832.8	282.78	523	977.8
-3.22	-1	24.8	31.67	89	169.8	81.67	179	331.8	131.67	269	493.8	181.67	359	655.8	231.67	449	833.8	283.33	524	979.8
-2.11	0	26.4	32.22	90	170.8	82.22	180	332.8	132.22	270	494.8	182.22	360	656.8	232.22	450	834.8	283.89	525	981.8
-1.00	1	28.0	32.78	91	171.8	82.78	181	333.8	132.78	271	495.8	182.78	361	657.8	232.78	451	835.8	284.44	526	983.8
0.11	2	29.6	33.33	92	172.8	83.33	182	334.8	133.33	272	496.8	183.33	362	658.8	233.33	452	836.8	285.00	527	985.8
1.22	3	31.2	33.89	93	173.8	83.89	183	335.8	133.89	273	497.8	183.89	363	659.8	233.89	453	837.8	285.56	528	987.8
2.33	4	32.8	34.44	94	174.8	84.44	184	336.8	134.44	274	498.8	184.44	364	660.8	234.44	454	838.8	286.11	529	989.8
3.44	5	34.4	35.00	95	175.8	85.00	185	337.8	135.00	275	499.8	185.00	365	661.8	235.00	455	839.8	286.67	530	991.8
4.56	6	36.0	35.56	96	176.8	85.56	186	338.8	135.56	276	500.8	185.56	366	662.8	235.56	456	840.8	287.22	531	993.8
5.67	7	37.6	36.11	97	177.8	86.11	187	339.8	136.11	277	501.8	186.11	367	663.8	236.11	457	841.8	287.78	532	995.8
6.78	8	39.2	36.67	98	178.8	86.67	188	340.8	136.67	278	502.8	186.67	368	664.8	236.67	458	842.8	288.33	533	997.8
7.89	9	40.8	37.22	99	179.8	87.22	189	341.8	137.22	279	503.8	187.22	369	665.8	237.22	459	843.8	288.89	534	999.8
9.00	10	42.4	37.78	100	180.8	87.78	190	342.8	137.78	280	504.8	187.78	370	666.8	237.78	460	844.8	289.44	535	1001.8
10.11	11	44.0	38.33	101	181.8	88.33	191	343.8	138.33	281	505.8	188.33	371	667.8	238.33	461	845.8	290.00	536	1003.8
11.22	12	45.6	38.89	102	182.8	88.89	192	344.8	138.89	282	506.8	188.89	372	668.8	238.89	462	846.8	290.56	537	1005.8
12.33	13	47.2	39.44	103	183.8	89.44	193	345.8	139.44	283	507.8	189.44	373	669.8	239.44	463	847.8	291.11	538	1007.8
13.44	14	48.8	40.00	104	184.8	89.99	194	346.8	140.00	284	508.8	190.00	374	670.8	240.00	464	848.8	291.67	539	1009.8
14.56	15	50.4	40.56	105	185.8	90.56	195	347.8	140.56	285	509.8	190.56	375	671.8	240.56	465	849.8	292.22	540	1011.8
15.67	16	52.0	41.11	106	186.8	91.11	196	348.8	141.11	286	510.8	191.11	376	672.8	241.11	466	850.8	292.78	541	1013.8
16.78	17	53.6	41.67	107	187.8	91.67	197	349.8	141.67	287	511.8	191.67	377	673.8	241.67	467	851.8	293.33	542	1015.8
17.89	18	55.2	42.22	108	188.8	92.22	198	350.8	142.22	288	512.8	192.22	378	674.8	242.22	468	852.8	293.89	543	1017.8
19.00	19	56.8	42.78	109	189.8	92.78	199	351.8	142.78	289	513.8	192.78	379	675.8	242.78	469	853.8	294.44	544	1019.8
20.11	20	58.4	43.33	110	190.8	93.33	200	352.8	143.33	290	514.8	193.33	380	676.8	243.33	470	854.8	295.00	545	1021.8
21.22	21	60.0	43.89	111	191.8	93.89	201	353.8	143.89	291	515.8	193.89	381	677.8	243.89	471	855.8	295.56	546	1023.8
22.33	22	61.6	44.44	112	192.8	94.44	202	354.8	144.44	292	516.8	194.44	382	678.8	244.44	472	856.8	296.11	547	1025.8
23.44	23	63.2	45.00	113	193.8	95.00	203	355.8	145.00	293	517.8	195.00	383	679.8	245.00	473	857.8	296.67	548	1027.8
24.56	24	64.8	45.56	114	194.8	95.56	204	356.8	145.56	294	518.8	195.56	384	680.8	245.56	474	858.8	297.22	549	1029.8
25.67	25	66.4	46.11	115	195.8	96.11	205	357.8	146.11	295	519.8	196.11	385	681.8	246.11	475	859.8	297.78	550	1031.8
26.78	26	68.0	46.67	116	196.8	96.67	206	358.8	146.67	296	520.8	196.67	386	682.8	246.67	476	860.8	298.33	551	1033.8
27.89	27	69.6	47.22	117	197.8	97.22	207	359.8	147.22	297	521.8	197.22	387	683.8	247.22	477	861.8	298.89	552	1035.8
29.00	28	71.2	47.78	118	198.8	97.78	208	360.8	147.78	298	522.8	197.78	388	684.8	247.78	478	862.8	299.44	553	1037.8
30.11	29	72.8	48.33	119	199.8	98.33	209	361.8	148.33	299	523.8	198.33	389	685.8	248.33	479	86			