

# MN101C18A

<b>Type</b>	<b>MN101C18A (under development)</b>
<b>ROM (x8-bit)</b>	32K (External memory can be expanded)
<b>RAM (x8-bit)</b>	1024 (External memory can be expanded)
<b>Minimum Instruction Execution Time</b>	<p><b>Standard:</b> 0.10 <math>\mu</math>s (at 4.5 to 5.5V, 20MHz)  0.25 <math>\mu</math>s (at 2.7 to 5.5V, 8MHz)  1.00 <math>\mu</math>s (at 2.0 to 5.5V, 2MHz)*  125 <math>\mu</math>s (at 2.0 to 5.5V, 32kHz)*</p> <p><b>Double speed:</b> 0.10 <math>\mu</math>s (at 4.5 to 5.5V, 10MHz)  0.25 <math>\mu</math>s (at 2.7 to 5.5V, 4MHz)  1.00 <math>\mu</math>s (at 2.0 to 5.5V, 1MHz)*  62.5 <math>\mu</math>s (at 2.0 to 5.5V, 32kHz)*</p> <p>* The lower limit for operation guarantee for EPROM built-in version is 2.7V.</p>
<b>Interrupts</b>	<ul style="list-style-type: none"> <li>• RESET • Watch dog • External 0 • External 1 • External 2 • External 3 • External 4 • Timer 0 • Timer 1</li> <li>• timer 2 • Timer 3 • Timer 4 • Timer 5 • Clock timer • Serial 0 (2 systems) • Key interruption (8 lines) • Serial 1</li> <li>• Automatic Transfer finish • A/D conversion finish • External 5 • Timer 6 • Timer 7 (2 systems) • Timer8</li> </ul>
<b>Timer Counter</b>	<p><b>Timer Counter 0: 8-bit x 1</b> (Square-wave/8-bit PWM Output, Event Count, Generation of Remote Control Carrier, Pulse Width Measurement)  Clock Source.....1/2, 1/4 of System Clock, 1/1, 1/4, 1/16, 1/32, 1/64 of OSC Oscillation Clock, External Clock Input, 1/1 of XI Oscillation Clock  Interrupt Source.....Coincidence with Compare Register 0</p> <p><b>Timer Counter 1: 8-bit x 1</b> (Square-wave Output, Event Count, Synchronous Output Event)  Clock Source.....1/2, 1/8 of System Clock, 1/1, 1/4, 1/16, 1/64, 1/128 of OSC Oscillation Clock, 1/1 of XI Oscillation Clock, External Clock Input  Interrupt Source.....Coincidence with Compare Register 1</p> <p><b>Timer Counter 0, 1 can be cascade-connected.</b></p> <p><b>Timer Counter 2: 8-bit x 1</b> (Square-wave/8-bit PWM Output, Event Count, Synchronous Output Event, Pulse Width Measurement)  Clock Source.....1/2, 1/4 of System Clock, 1/1, 1/4, 1/16, 1/32, 1/64 of OSC Oscillation Clock, 1/1 of XI Oscillation Clock, External Clock Input)  Interrupt Source.....Coincidence with Compare Register 2</p> <p><b>Timer Counter 3: 8-bit x 1</b> (Square-wave Output, Event Count, Generation of Remote Control Carrier)  Clock Source.....1/2, 1/8 of System Clock, 1/1, 1/4, 1/16, 1/64, 1/128 of OSC Clock, 1/1 of XI Oscillation Clock, External Clock Input  Interrupt Source.....Coincidence with Compare Register 3</p> <p><b>Timer Counter 2, 3 can be cascade-connected.</b></p> <p><b>Timer Counter 4: 8-bit x 1</b> (Square-wave/8-bit PWM Output, Event Count, Pulse Width Measurement, Serial 0 Baud Rate Timer)  Clock Source.....1/2, 1/4 of System Clock, 1/1, 1/4, 1/16, 1/32, 1/64 of OSC Oscillation Clock, 1/1 of XI Oscillation Clock, 1/1 of External Clock Input  Interrupt Source.....Coincidence with Compare Register 4</p> <p><b>Timer Counter 5: 8-bit x 1</b> (Square-wave Output, Event Count, Serial 1 Baud Rate Timer)  Clock Source.....1/2, 1/8 of System Clock, 1/1, 1/4, 1/16, 1/64, 1/128 of OSC Oscillation Clock, 1/1 of XI Oscillation Clock, 1/1 of External Clock Input  Interrupt Source.....Coincidence with Compare Register 5</p> <p><b>Timer Counter 4, 5 can be cascade-connected.</b></p>

**Timer Counter (Continue)**

**Timer Counter 6: 8-bit Freerun Timer**

Clock Source.....1/1 of System Clock, 1/1, 1/4096, 1/8192 of OSC Oscillation Clock, 1/1, 1/4096, 1/8192 of XI Oscillation Clock  
 Interrupt Source.....Coincidence with Compare Register 6

**Timer Counter 7: 16-bit x 1** (Square-wave/16-bit PWM Output [Frequency/Duty Continuously Variable], Event Count, Input Capture, Synchronous Output Event, Pulse Width Measurement)

Clock Source.....1/1, 1/2, 1/4, 1/16 of System Clock, 1/1, 1/2, 1/4, 1/16 of OSC Oscillation Clock, 1/1, 1/2, 1/4, 1/16 of External Clock Input  
 Interrupt Source.....Coincidence with Compare Register 7 (2 lines)

**Timer Counter 8: 16-bit x 1** (Square-wave/8-bit PWM Output, Event Count, Input Capture, Pulse Width Measurement)

Clock Source.....1/1, 1/2, 1/4, 1/16 of System Clock, 1/1, 1/2, 1/4, 1/16 of OSC Oscillation Clock, 1/1, 1/2, 1/4, 1/16 of External Clock Input  
 Interrupt Source.....Coincidence with Compare Register 8

**Time Base Timer** (One-minute Count Setting)

Clock Source.....1/1 of OSC Oscillation Clock, 1/1 of XI Oscillation Clock  
 Interrupt Source.....Overflow of 1/32768 Prescaler

**Watchdog Timer**

Clock Source.....1/1048576, 1/65536, 1/262144 of System Clock

**DMA Controller**

Max. Transfer Cycles.....255  
 Starting Factor .....External Request, Various Types of Interrupt, Software  
 Transfer Mode .....1-byte Transfer, Word Transfer, Burst Transfer

**Serial Interface**

**Serial 0: 8-bit x 1** (Synchronous Type/UART [full-duplex])

Clock Source.....1/2, 1/16 of System Clock, 1/2 of Timer Counter 4, 1/2, 1/4, 1/16, 1/32 of OSC Oscillation Clock

**Serial 1: 8-bit x 1** (Synchronous Type/Simple UART [Half-duplex])

Clock Source.....1/2, 1/16 of System Clock, 1/2 of Timer Counter 5, 1/2, 1/4, 1/16, 1/32 of OSC Oscillation Clock

<b>I/O Pins</b>	I/O	<b>57</b>	• Common use • Specified pull-up Resistor available • Input/Output selectable (bit unit)
	Input	<b>13</b>	• Common use • Specified pull-up Resistor available

**A/D Inputs** 10-bit x 8ch (with S/H)

**Special Ports** Buzzer Output, Remote Control Carrier Signal Output, High-current Drive Port

**Package** LQFP080-P-1414A, QFP084-P-1818E

**Electrical Characteristics**

**Supply Current**

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating Supply Current	IDD1	fosc = 20MHz, VDD = 5V			60	mA
	IDD2	fx = 32kHz, VDD = 3V			100	µA
Supply Current at HALT	IDD3	fx = 32kHz, VDD = 3V			8	µA
Supply Current at STOP	IDD4	VDD = 5V, Ta=25°C			1	µA
		VDD = 5V, Ta=85°C			30	µA

# Support Tool


## In-Circuit Emulator

PX-ICE101C + PX-PRB101C18


## EPROM built-in Type

Use **MN101CP18A** [ES (Engineering Sample) available] in LQFP080-P-1414A, QFP084-P-1818E package.

## Pin Assignment

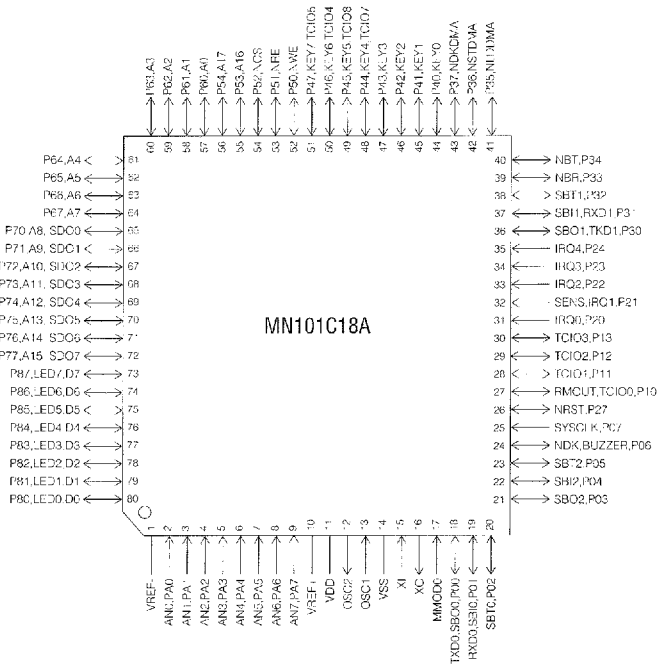

LQFP080-P-1414A

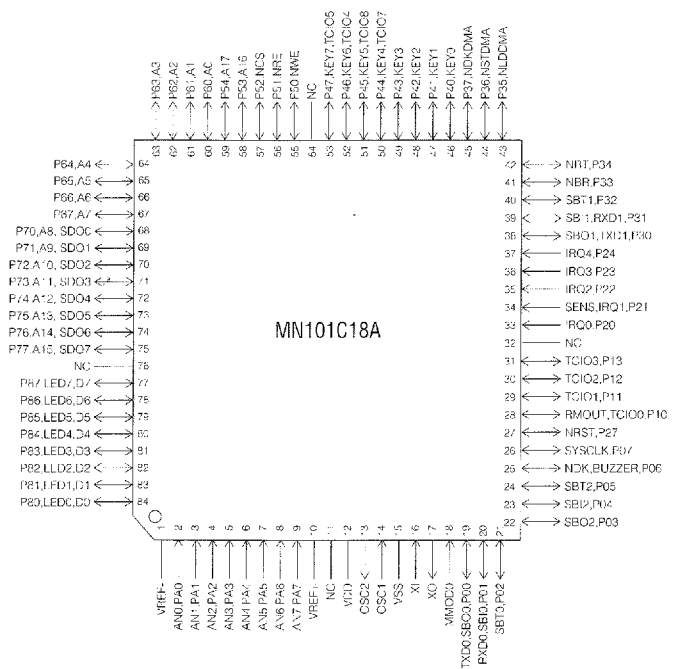

QFP084-P-1818E