

RECTIFIER ASSEMBLIES

Three Phase Bridges, 15-25 Amp, Standard and Fast Recovery Magnum®

678, 682, 695
696 SERIES

3

FEATURES

- Current Rating: to 25A
- PIVs: from 100 to 600V
- Only Fused-in-Glass Diodes Used
- Recovery Times: to 500ns
- Controlled Avalanche Characteristics
- Surge Ratings: to 150A
- Aluminum Heat Sink Case. Electrically Insulated

DESCRIPTION


This series of three phase MAGNUM® bridges offer the ultimate in high current power supply applications. The fast recovery series allows operation at full power at high frequencies (up to 40KHz squarewave), often used in choppers, inverters and converters in aircraft, missiles, etc., equipment.

ABSOLUTE MAXIMUM RATINGS

| | |
|---|-------------------------------|
| Peak Inverse Voltage | 100 to 600V |
| Maximum Average D.C. Output Current | See Electrical Specifications |
| Non-Repetitive Sinusoidal Surge (8.3ms) | See Electrical Specifications |
| Operating and Storage Temperature Range, T _C | -65°C to +150°C |
| Thermal Resistance Junction to Ambient, All Series | 20°C/W |
| Junction to Case, 678, 682 Series | 1.5°C/W |
| Junction to Case, 695, 696 Series | 3.0°C/W |


MECHANICAL SPECIFICATIONS

678, 682, 695, 696 SERIES

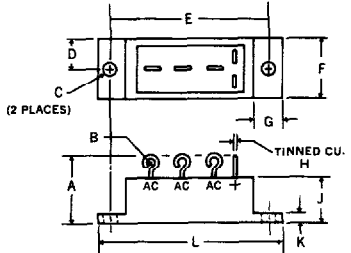

| | ins. | mm. |
|---|----------------|----------------|
| A | .820 MAX. | 20.83 MAX. |
| B | .09 DIA. TYP. | 2.29 DIA. TYP. |
| C | .164-.174 DIA. | 4.17-4.42 DIA. |
| D | .365-.385 | 9.27-9.78 |
| E | 1.870-1.880 | 47.50-47.75 |
| F | .740-.760 | 18.80-19.30 |
| G | .370-.390 | 9.40-9.91 |
| H | .040 TYP. | 1.02 TYP. |
| J | .486-.506 | 12.34-12.85 |
| K | .115-.135 | 2.92-3.43 |
| L | 2.240-2.260 | 56.90-57.40 |

Typical Weight — 30 grams

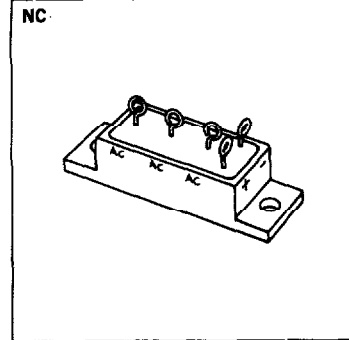

MARKING




| | |
|---------------------------|------|
| Alternating Current Input | A.C. |
| Cathode — Positive Output | + |
| Anode — Negative | - |

Part number is printed on the body.


Microsemi Corp.
Watertown
The diode experts

| Electrical Specifications (at 25°C unless noted) | | | | | | Maximum Ratings | | | |
|--|-------------|--------------------------------------|---------------------------------------|---------------------------|--------------------------------|-------------------------------------|---------------------------|---|-----|
| Type | PIV Per Leg | Maximum Forward Voltage Drop Per Leg | Maximum Leakage Current Per Leg @ PIV | | Maximum Reverse Recovery Time* | Maximum Average D.C. Output Current | | Non-Repitive Sinusoidal Surge (8.3ms) $T_A = 100^\circ\text{C}$ | |
| | | | $T_A = 25^\circ\text{C}$ | $T_A = 100^\circ\text{C}$ | | $T_C = 55^\circ\text{C}$ | $T_C = 100^\circ\text{C}$ | | |
| | Volts | | μA | μA | ns | Amps | Amps | Amps | |
| Standard Recovery | 678-1 | 100 | 1.2V @ 10A | 10 | 200 | — | 25 | 18.5 | 150 |
| | 678-2 | 200 | | | | | | | |
| | 678-3 | 300 | | | | | | | |
| | 678-4 | 400 | | | | | | | |
| | 678-5 | 500 | | | | | | | |
| | 678-6 | 600 | | | | | | | |
| Standard Recovery | 695-1 | 100 | 1.2V @ 2A | 5 | 150 | — | 15 | 9 | 80 |
| | 695-2 | 200 | | | | | | | |
| | 695-3 | 300 | | | | | | | |
| | 695-4 | 400 | | | | | | | |
| | 695-5 | 500 | | | | | | | |
| | 695-6 | 600 | | | | | | | |
| Fast Recovery | 682-1 | 100 | 1.2V @ 6A | 10 | 200 | 500 | 20 | 14 | 150 |
| | 682-2 | 200 | | | | | | | |
| | 682-3 | 300 | | | | | | | |
| | 682-4 | 400 | | | | | | | |
| | 682-5 | 500 | | | | | | | |
| | 682-6 | 600 | | | | | | | |
| Fast Recovery | 696-1 | 100 | 1.2V @ 2A | 5 | 150 | 500 | 15 | 9 | 60 |
| | 696-2 | 200 | | | | | | | |
| | 696-3 | 300 | | | | | | | |
| | 696-4 | 400 | | | | | | | |
| | 696-5 | 500 | | | | | | | |
| | 696-6 | 600 | | | | | | | |


*Measured in a reverse recovery circuit switching from 1.0A forward to 1.0A reverse current recovering to 0.5A.

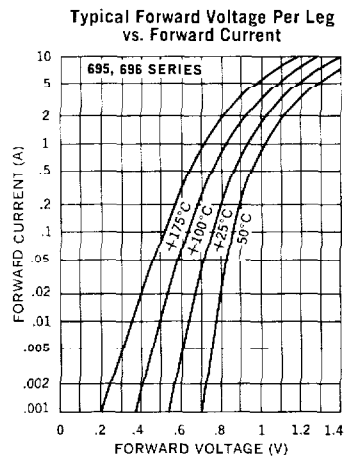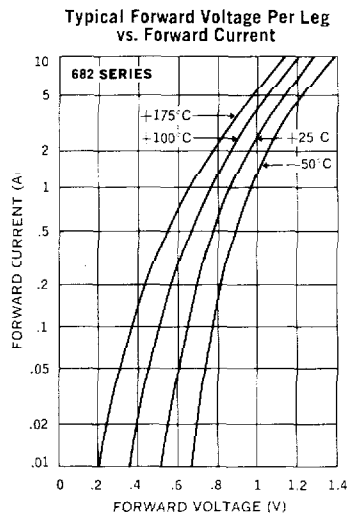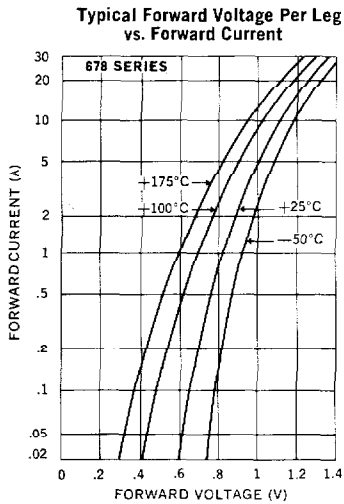


Typical Leakage Current vs. PIV

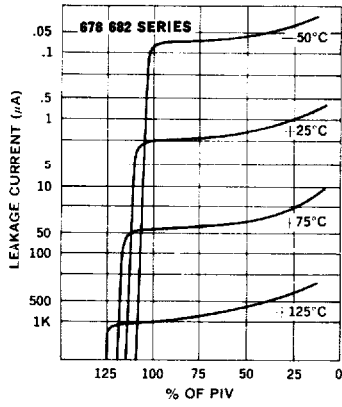


Typical Leakage Current vs. PIV

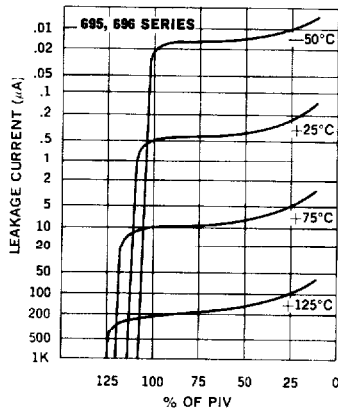

Reverse Recovery Circuit

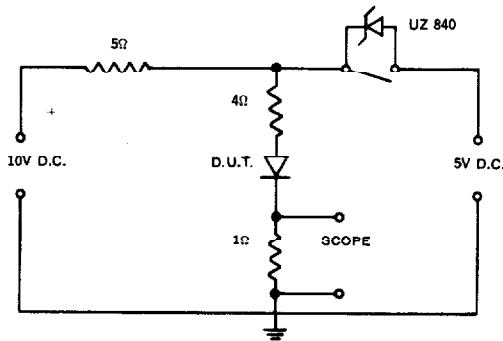

Current Derating Curve

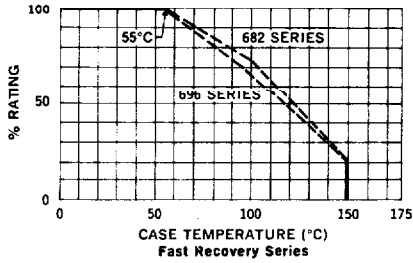

Current Derating Curve

