

## Schottky Bridge Rectifier

### ■特征 Features


- $I_o$  1.0A
- $V_{RRM}$  20V~100V
- 肖特基芯片  
Schottky chip
- 耐正向浪涌电流能力高  
High surge forward current capability
- 低正向电压  
Low VF

### ■用途 Applications

- 作一般电源单相桥式整流用  
General purpose 1 phase Bridge rectifier applications

### ■极限值（绝对最大额定值）

### ■外形尺寸和印记 Outline Dimensions and Mark

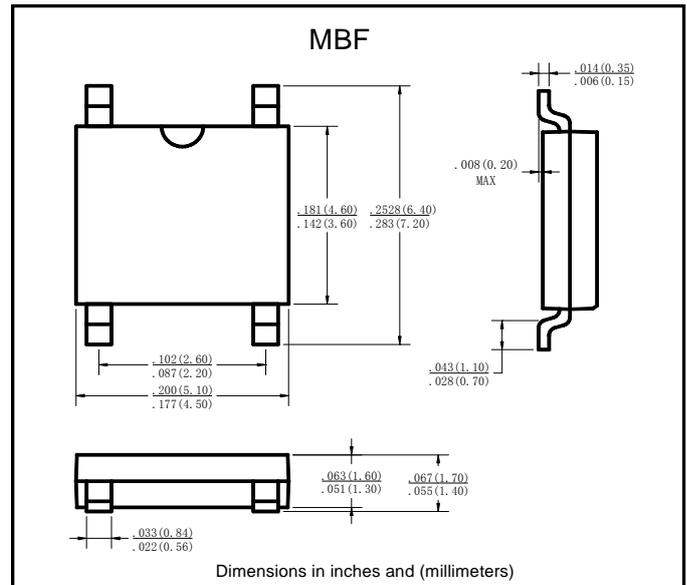

### Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	MSK				
				12F	14F	16F	18F	110F
反向重复峰值电压 Repetitive Peak Reverse Voltage	$V_{RRM}$	V		20	40	60	80	100
平均整流输出电流 Average Rectified Output Current	$I_o$	A	60Hz正弦波, 电阻负载, $T_a=25^\circ\text{C}$ 60Hz sine wave, R-load, $T_a=25^\circ\text{C}$	安装在氧化铝基板上 On alumina substrate	1.0			
				安装在玻璃-环氧基板上 On glass-epoxi substrate	0.8			
正向（不重复）浪涌电流 Surge(Non-repetitive)Forward Current	$I_{FSM}$	A	60Hz正弦波, 一个周期, $T_j=25^\circ\text{C}$ 60Hz sine wave, 1 cycle, $T_j=25^\circ\text{C}$	40				
正向浪涌电流的平方对电流浪涌持续时间的积分值 Current Squared Time	$i^2t$	$A^2S$	$1\text{ms} \leq t < 8.3\text{ms}$ $T_j=25^\circ\text{C}$ , 单个二极管 $1\text{ms} \leq t < 8.3\text{ms}$ $T_j=25^\circ\text{C}$ , Rating of per diode	6.6				
存储温度 Storage Temperature	$T_{stg}$	$^\circ\text{C}$		-55 ~+150				
结温 Junction Temperature	$T_j$	$^\circ\text{C}$		-55 ~+150				

### ■电特性（ $T_a=25^\circ\text{C}$ 除非另有规定）

### Electrical Characteristics ( $T_a=25^\circ\text{C}$ Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition	最大值 Max		
正向峰值电压 Peak Forward Voltage	$V_{FM}$	V	$I_{FM}=0.5\text{A}$ , 脉冲测试, 单个二极管的额定值 Pulse measurement, Rating of per diode	0.55	0.65	0.85
反向峰值电流 Peak Reverse Current	$I_{RRM}$	mA	$V_{RM}=V_{RRM}$ , 脉冲测试, 单个二极管的额定值 $V_{RM}=V_{RRM}$ , Pulse measurement, Rating of per diode	0.5		
热阻 Thermal Resistance	$R_{\theta J-A}$	$^\circ\text{C/W}$	结和环境之间, 安装在氧化铝基板上 Between junction and ambient, On alumina substrate	76		
			结和环境之间, 安装在玻璃-环氧基板上 Between junction and ambient, On glass-epoxi substrate	134		
	$R_{\theta J-L}$		结和引线之间 Between junction and lead	20		

## ■特性曲线（典型） Characteristics(Typical)

图1:  $I_o$ - $T_a$ 曲线  
FIG1: $I_o$ - $T_a$  Curve

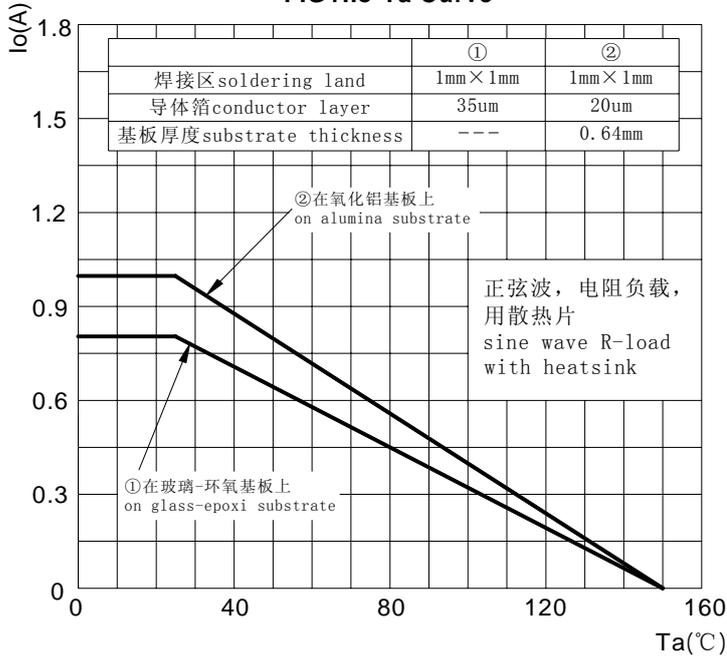


图2: 耐正向浪涌电流曲线  
FIG2:Surge Forward Current Capacity

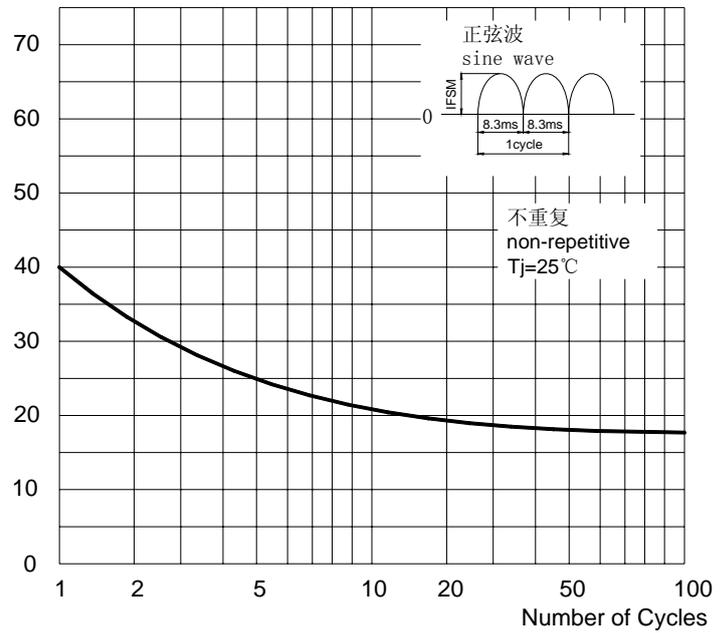


图3: 正向电压曲线  
FIG3: Forward Voltage

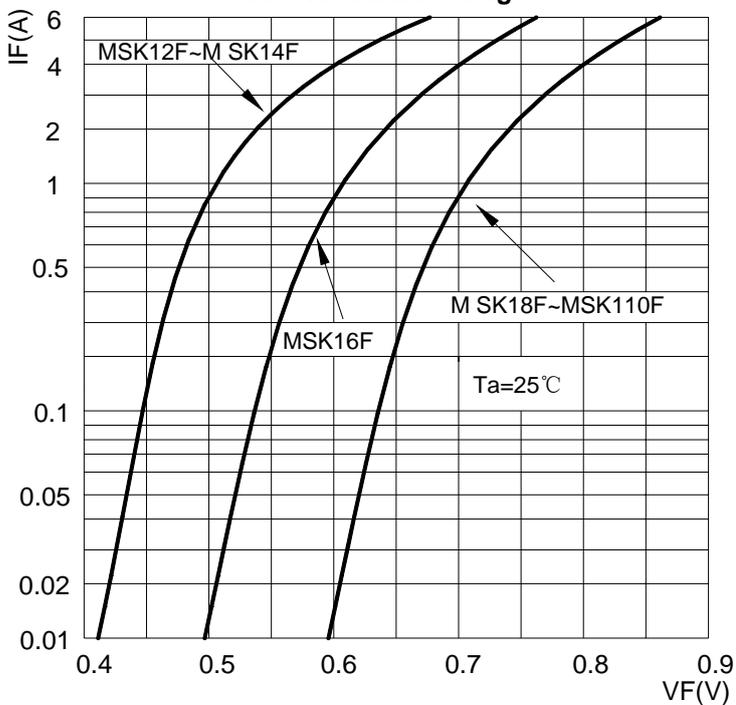


图4: 反向电流曲线  
FIG4:Typical Reverse Characteristics

