

## OH017

## GaAs hall element


Magnetic sensor

## ■ Features

- Hall voltage : typ. 90mV( $V_C=3V, B=0.1T$ )
- Input resistance : typ. 2k $\Omega$ (min. 1.5k $\Omega$ )
- Output resistance : typ. 7k $\Omega$
- Low current dissipation type
- Mini thin type (4-pin) package. Automatic insertion through taping and magazine possible.

## ■ Applications

- Various hall motor  
(Applicable to CD, VD, VCR, FDD, and other portable equipment)
- Applicable to wide-varying field (OA equipment, etc.)

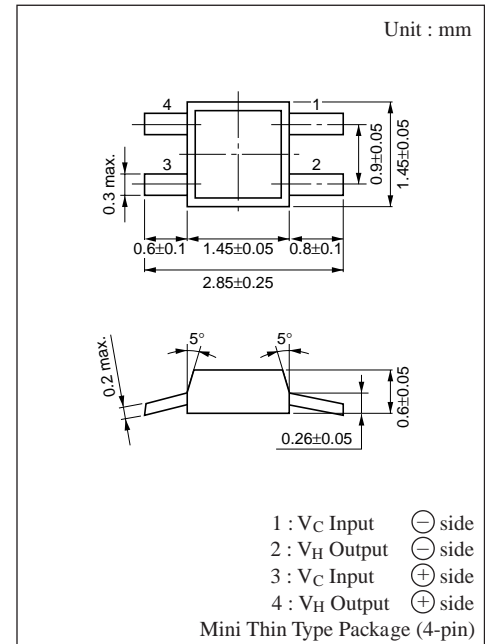

Marking Symbol : D

■ Absolute Maximum Ratings ( $T_a=25^\circ\text{C}$ )

Parameter	Symbol	Rating	Unit
Control voltage	$V_C$	6	V
Power dissipation	$P_D$	100	mW
Operating ambient temperature	$T_{opr}$	-10 to +125	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +125	$^\circ\text{C}$

■ Electrical Characteristics ( $T_a=25^\circ\text{C}$ )

Parameter	Symbol	Condition	min	typ	max	Unit
Hall voltage	$V_H^{*1}$	$V_C=3V, B=0.1T$	70	90	110	mV
Unbalance voltage	$V_{HO}^{*2}$	$V_C=3V, B=0T$			+9.5	mV
Input Resistance	$R_{IN}$	$I_C=0.1mA, B=0T$	1.5	2	3	k $\Omega$
Output resistance	$R_{OUT}$	$I_C=0.1mA, B=0T$	5	7	10	k $\Omega$
Temperature coefficient of hall voltage	$\beta$	$I_C=1.5mA, B=0.1T$			-0.06	%/ $^\circ\text{C}$
Temperature coefficient of input resistance	$\alpha$	$I_C=0.1mA, B=0T$			0.3	%/ $^\circ\text{C}$
Linearity of hall voltage	$\gamma^{*3}$	$I_C=1mA, B=0.05T/0.1T$			2	%


$$*1 V_H = \frac{|V_H^+| + |V_H^-|}{2}$$

\*2 Output pin voltage at no-load ( $B=0$ )


\*3 The linearity  $\gamma$  of  $V_H$  is a percentage of the cumulative sensitivity of  $K_{H0.05}$  and  $K_{H0.1}$  measured at  $B=0.05T$  and  $0.1T$  for the average value.

$$\gamma = \frac{K_{H0.1} - K_{H0.05}}{1/2 (K_{H0.05} + K_{H0.1})} \quad \left( \text{Percentage of the cumulative sensitivity } K_H = \frac{V_H}{I_C \cdot B} \right)$$


$P_D - T_a$

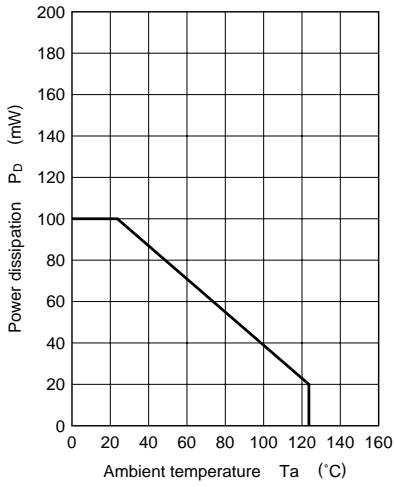


$V_H - T_a$

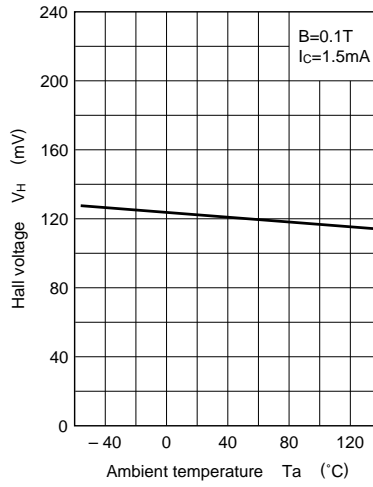


$R_{IN} - T_a$

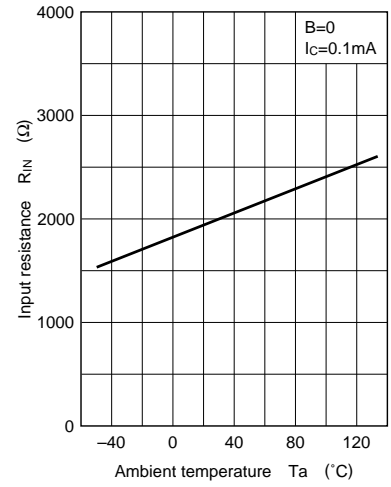


$V_H - B$

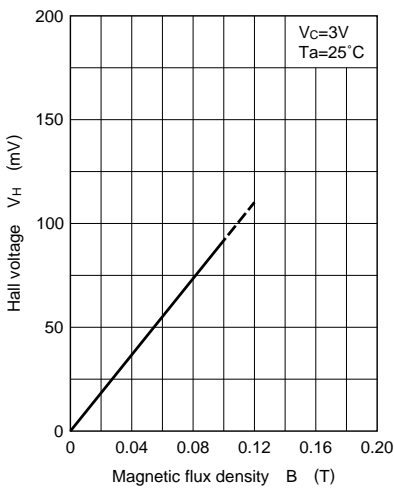

$V_H - I_c$

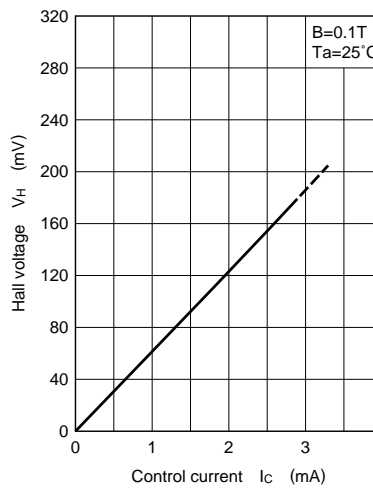

$V_H - V_C$

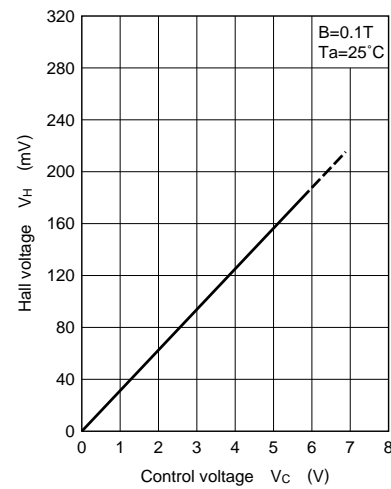

■ Typical Drive Circuit

