


MAIER ELECTRONICS INC.

ELECTRON TUBE, SENSOR DIVISION

U.V. DETECTOR TUBE PX 334 Hamamatsu Replacement for Type R-334

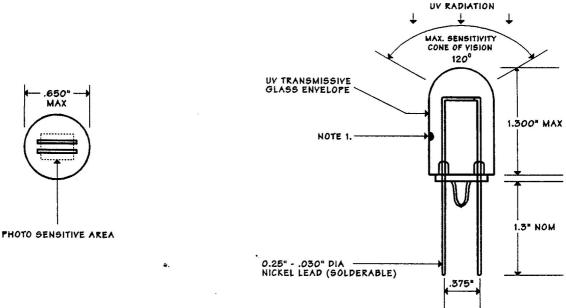

FOR THE DC OPERATION OF THE TUBE, THE LEAD CLOSE TO THE BLACK NOTE 1. DOT ON THE BODY SHOULD BE NEGATIVE (CATHODE).

| Typical C | haracteristics: |
|-----------|-----------------|
|-----------|-----------------|

Spectral response:

Wavelength of maximum response:

Tube Voltage Drop:

Sensitivity: Pulses or counts when

- Tube is operated on 350 Vrms and

- Tube is exposed to a standard candle 1 inch dia. at a distance of 12 inches.

Background Noise Response: At average room light intensity

- Tube exposed to 100 Watt incand. bulb powered at 90 VAC from a distance of 12 inches.

- Tube heated to 100° C exposed to 100 Watt incand. bulb powered at 90 VAC from a distance of 12 inches.

- Tube operating at 400 VDC:

< 10 Counts/Min.

< 10 Counts/Min.

PX334

~ 180 to 250 nm

 $210 \pm 10 \text{ nm}$

120 Counts

205 ± 10 Volts

< 20 counts/Min.

Operating Characteristics:

Operating voltage: minimum:

standard:

maximum:

Photo cathode current: normal:

maximum:

750 Vrms 1 mA

400 Vrms

575 Vrms

2 mA


- 20° C to +100° C

Average Life:

10,000 hours at 1 mA operating current and 100° C.

Measuring Circuit used for Data:

Ambient temperature:

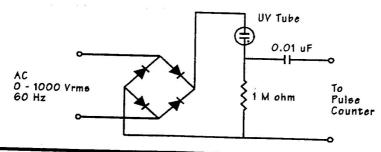

www.DataSheet4U.com