

# Coreless Coil Current Transducer

## RH 100 .. 1000-S

For the electronic measurement of currents: AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).

$$I_{PN} = 100 \dots 1000 \text{ A}$$



### Electrical data

Primary nominal r.m.s. current		Type	
$I_{PN}$ (A)			
100		<b>RH 100-S</b>	
200		<b>RH 200-S</b>	
500		<b>RH 500-S</b>	
1000		<b>RH 1000-S</b>	
$V_{OUT}$	Output voltage(r.m.s) @ $\pm I_{PN}$ , $R_L = 10 \text{ k}\Omega$ , $T_A = 25^\circ\text{C}$	4	V
$V_C$	Supply voltage ( $\pm 5 \%$ )	$\pm 15$	V
$V_d$	R.m.s. voltage for AC isolation test, 50/60Hz, 1 mn	$> 2.5$	kV
$I_C$	Current consumption	15	mA
$R_{IS}$	Isolation resistance@ 500 V DC	$> 500$	M $\Omega$
$R_L$	Load resistance	$\geq 100$	K $\Omega$

### Features

- No magnetic core
- Rogowski Coil principle
- Highly accurate integration circuit
- Voltage output

### Advantages

- Wide sensing range
- Wide frequency range
- Quick response
- No hysteresis error
- No insertion impedance
- Small size and lightweight

### Accuracy-Dynamic performance data

$e_L$	Linearity ( $0 \dots \pm I_{PN}$ )	$\leq \pm 0.5$	% of $I_{PN}$
$V_{OE}$	Electrical offset voltage, $T_A = 25^\circ\text{C}$	$\pm 5$	mV
$V_{OT}$	Thermal drift of $V_{OE}$	$\leq \pm 0.3$	mV/K
$TCE_G$	Thermal drift of the gain (% of reading)	$\pm 0.03$	%/K
$t_r$	Response time @ 90% of $I_p$	1	$\mu\text{s}$
$f$	Frequency bandwidth ( $\pm 3 \text{ dB}$ )	20Hz .. 100KHz	

### General data




$T_A$	Ambient operating temperature	-10 .. +75	$^\circ\text{C}$
$T_S$	Ambient storage temperature	-15 .. +80	$^\circ\text{C}$
$m$	Mass	45	g
	Min. internal creepage distance/clearance	$\varnothing 20 \pm 0.5$	mm

### Applications

- Observing complicated current waveforms
- High speed and high current sensing such as IGBT
- Welding
- Power unit
- Electric power regulator
- Discharge tube
- Antenna
- Monitoring for irruptive current

Notes :

# RH 100 .. 1000-S (in mm)

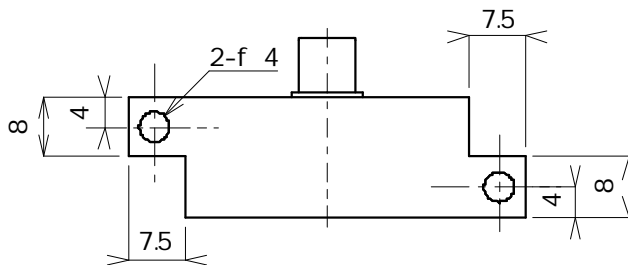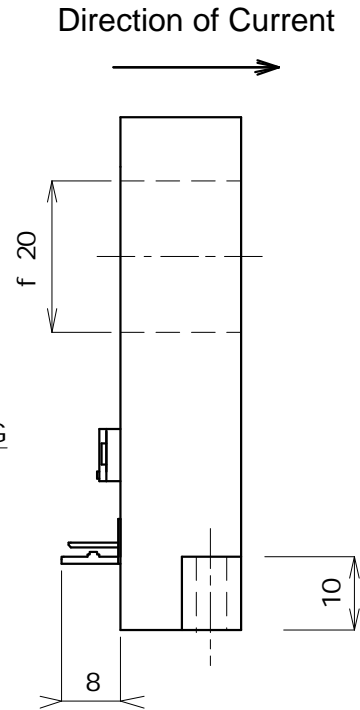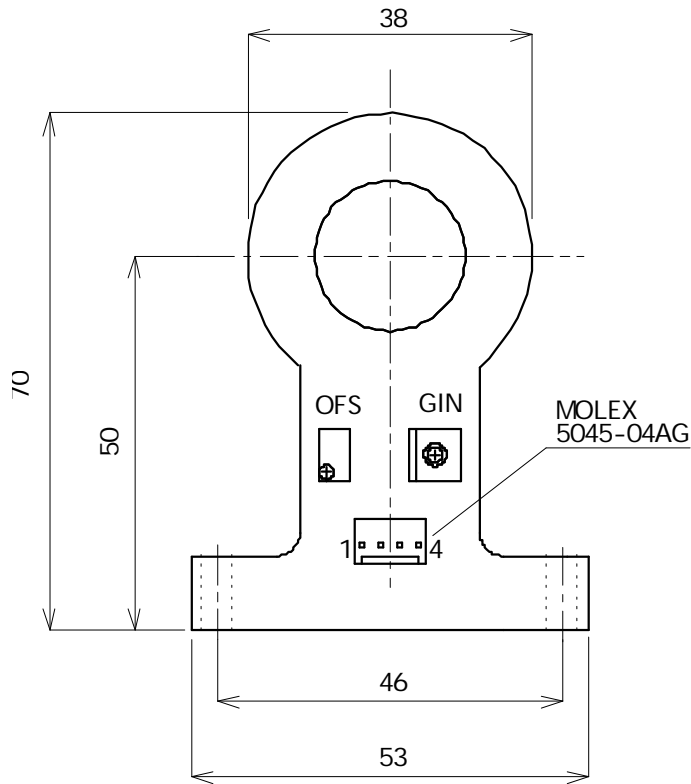

## Terminal Pin Identification

- 1... + V<sub>CC</sub>
- 2... - V<sub>CC</sub>
- 3... OUTPUT
- 4... GND