

RT1P24BX SERIES

〈Transistor〉

Transistor With Resistor

For Switching Application

Silicon PNP Epitaxial Type

DESCRIPTION


RT1P24BX is a one chip transistor with built-in bias resistor, NPN type is RT1N24BX.

FEATURE

- Built-in bias resistor ($R_2=22\text{k}\Omega$).


APPLICATION

Inverted circuit, switching circuit, interface circuit, driver circuit.

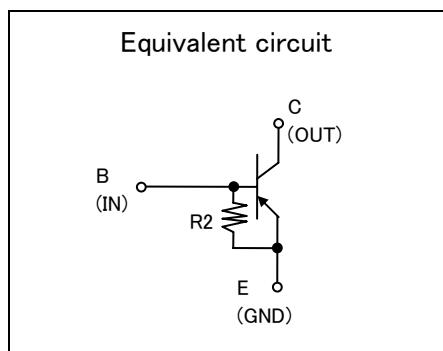

OUTLINE DRAWING


UNIT : mm

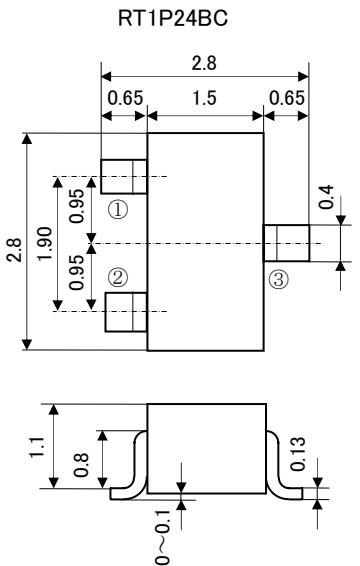

JEITA: SC-59
JEDEC: Similar to TO-236

Terminal Connector

- ①: Base
- ②: Emitter
- ③: Collector

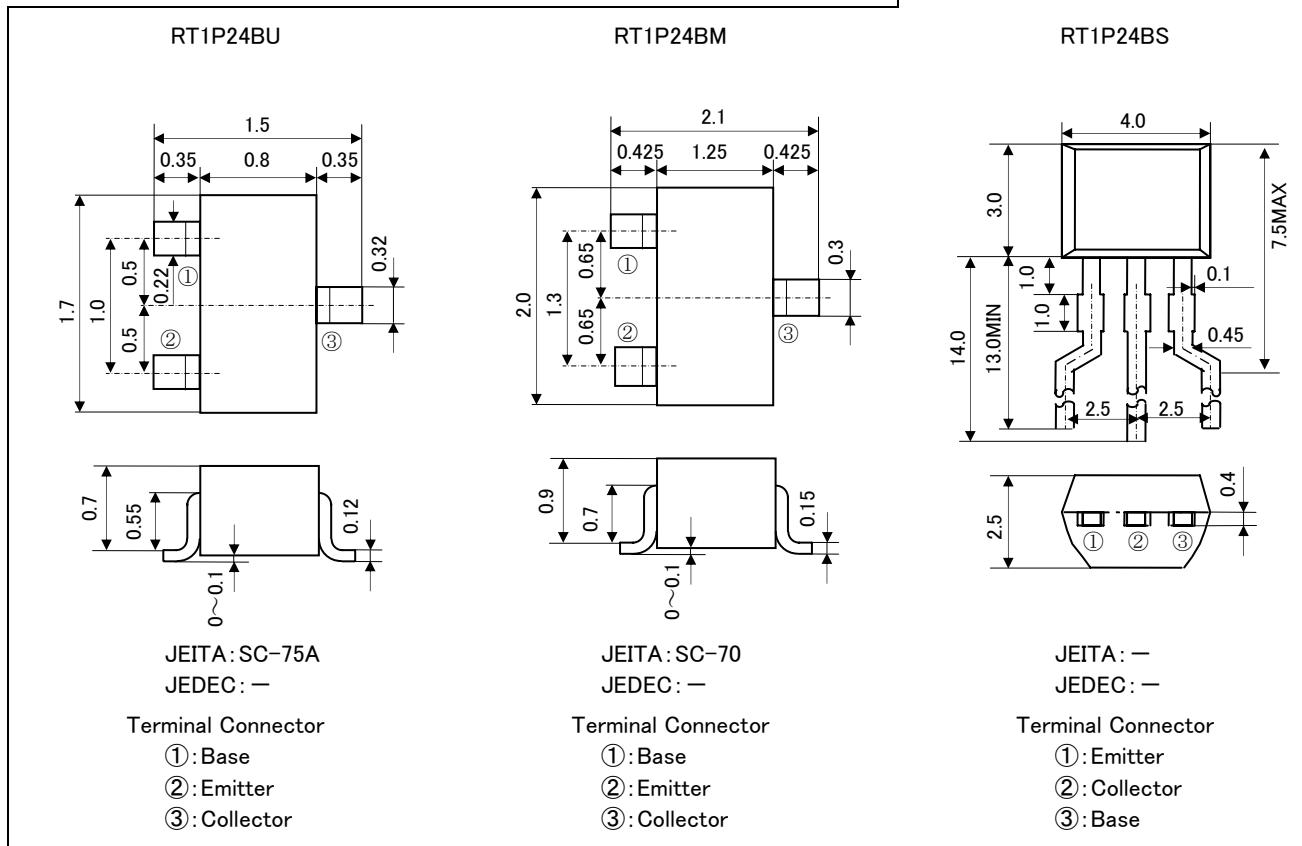

RT1P24BX SERIES



⟨Transistor⟩

Transistor With Resistor

For Switching Application

Silicon PNP Epitaxial Type

MARKING

RT1P24BC RT1P24BM RT1P24BU	RT1P24BS
	

MAXIMUM RATING (Ta=25°C)

SYMBOL	PARAMETER	RATING				UNIT
		RT1P24BU	RT1P24BM	RT1P24BC	RT1P24BS	
V _{CBO}	Collector to Base voltage			-50		V
V _{EBO}	Emitter to Base voltage			-6		V
V _{CEO}	Collector to Emitter voltage			-50		V
I _C	Collector current			-100		mA
I _{CM}	Peak Collector current			-200		mA
P _C	Collector dissipation(Ta=25°C)	150	200	450		mW
T _j	Junction temperature			+150		°C
T _{stg}	Storage temperature			-55~+150		°C

ELECTRICAL CHARACTERISTICS (Ta=25°C)

SYMBOL	PARAMETER	TEST CONDITION	LIMIT			UNIT
			MIN	TYP	MAX	
V _{(BR)CEO}	C to E break down voltage	I _C =-100 μA, R _{BE} =∞	-50	—	—	V
I _{CBO}	Collector cut off current	V _{CB} =-50V, I _E =0	—	—	-0.1	μA
I _{EBO}	Emitter cut off current	V _{EB} =-5V, I _C =0	-170	-227	-330	μA
h _{FE}	DC forward current gain	V _{CE} =-5V, I _C =-5mA	56	—	—	—
V _{CE(sat)}	C to E saturation voltage	I _C =-10mA, I _B =-0.5mA	—	—	-0.3	V
R ₂	Emitter-base resistor	—	15	22	29	kΩ
f _T	Gain band width product	V _{CE} =-6V, I _E =10mA	—	150	—	MHz

RT1P24BX SERIES






⟨Transistor⟩

Transistor With Resistor

For Switching Application

Silicon PNP Epitaxial Type

TYPICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

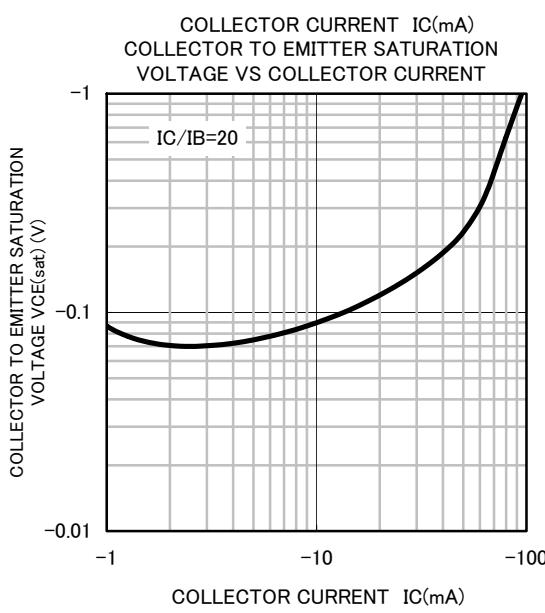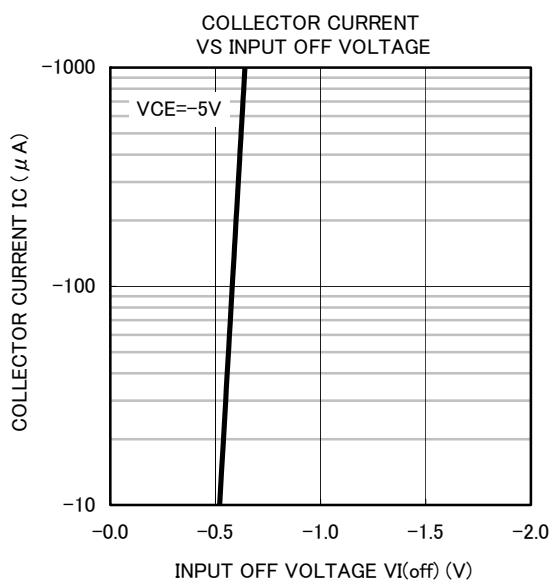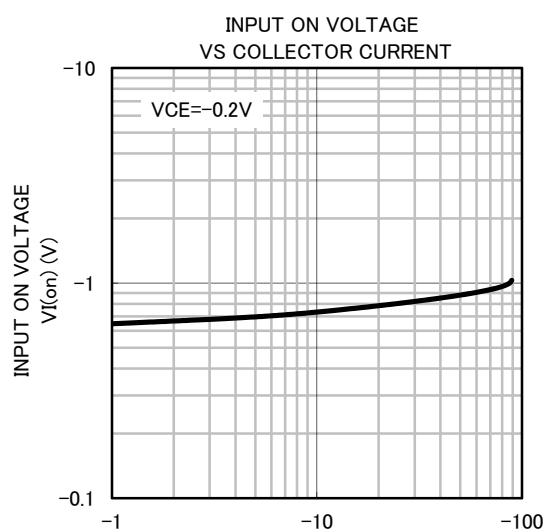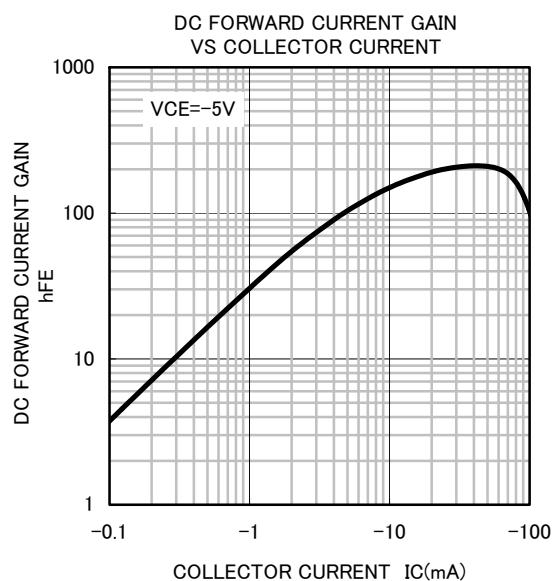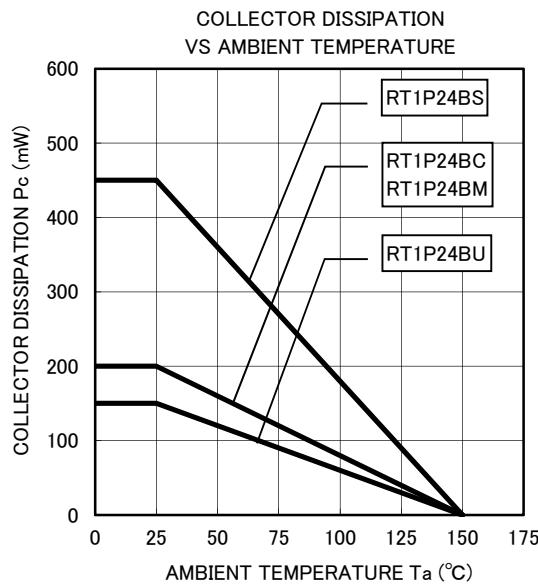

**Keep safety first in your circuit designs!**

·ISAHAYA Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1) placement of substitutive, auxiliary, (2) use of non-farmable material or (3) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to our customers in the selection of the ISAHAYA products best suited to the customer's application; they don't convey any license under any intellectual property rights, or any other rights, belonging ISAHAYA or third party.
- ISAHAYA Electronics Corporation assumes no responsibility for any damage, or infringement of any third party's rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by ISAHAYA Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor for the latest product information before purchasing product listed herein.
- ISAHAYA Electronics Corporation products are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of ISAHAYA Electronics Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact ISAHAYA Electronics Corporation or authorized ISAHAYA products distributor for further details on these materials or the products contained therein.