



## DUAL POWER AMPLIFIER SJ2822M


### GENERAL DESCRIPTION

The SJ2822M is a monolithic integrated circuit in 8 lead Minidip package. It is intended for use as dual audio power amplifier in portable cassette tape players and radios.

### ● FEATURES


- Dual Low-voltage power amplifier
- Supply voltage down to 1.8V
- Low crossover distortion
- Low quiescent current
- Bridge or stereo configuration

### BLOCK DIAGRAM

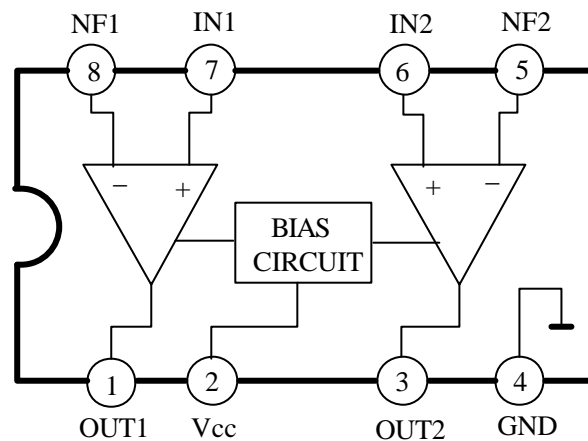

www.DataSheet4U.com

### PINNING

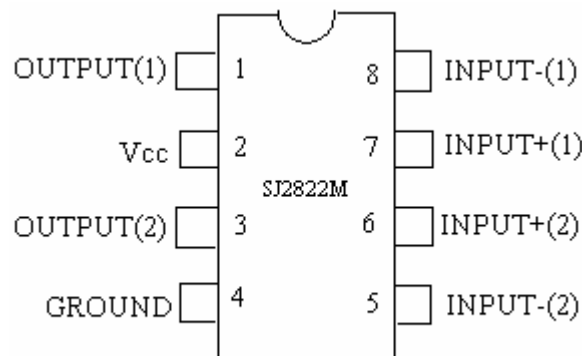

URL: <http://www.szsanjing.com>

----- TEL: 0755-29663136

FAX: 0755-29663137-----


**MAXIMUM RATINGS**

| Characteristics                                     | Symbol           | Value   | Unit |
|---|------------------|---------|------|
| Supply Voltage                                      | V <sub>cc</sub>  | 15      | V    |
| Output Peak Current                                 | I <sub>pk</sub>  | 1       | A    |
| Total Power Dissipation(at T <sub>amb</sub> =50°C)  | P <sub>D</sub>   | 1       | W    |
| Total Power Dissipation(at T <sub>case</sub> =50°C) | P <sub>D</sub>   | 1.4     | W    |
| Operating Ambient Temperature Range                 | T <sub>a</sub>   | -20~70  | °C   |
| Storage Temperature Range                           | T <sub>stg</sub> | -40~150 | °C   |

**ELECTRICAL CHARACTERISTICS**
**1.Stereo Test Circuit**(Unless otherwise specified V<sub>cc</sub>=6V,T<sub>amb</sub>=25°C)

| Characteristic                 | Symbol           | Test Condition  | Min. | Typ.              | Max. | Unit |  |
|--------------------------------|------------------|---|------|-------------------|------|------|--|
| Supply Voltage                 | V <sub>cc</sub>  |   | 1.8  |                   | 12   | V    |  |
| Quiescent Output Voltage       | V <sub>o</sub>   |   |      | 2.7               |      | V    |  |
|                                |                  | V <sub>cc</sub> =3V   |      | 1.2               |      | V    |  |
| Quiescent Drain Current        | I <sub>d</sub>   |   |      | 6                 | 9    | mA   |  |
| Input Bias Current             | I <sub>BA</sub>  |   |      | 100               |      | nA   |  |
| Output Power<br>(Each Channel) | P <sub>o</sub>   | d=10% f=1kHz<br>V <sub>cc</sub> =3V R <sub>L</sub> =4<br>V <sub>cc</sub> =3V R <sub>L</sub> =32   |      | 110<br>20         |      | mW   |  |
|                                |                  | d=10% f=1kHz<br>V <sub>cc</sub> =9V R <sub>L</sub> =8<br>V <sub>cc</sub> =6V R <sub>L</sub> =4<br>V <sub>cc</sub> =4.5V R <sub>L</sub> =4 | 0.4  | 1<br>0.65<br>0.32 |      | W    |  |
|                                |                  |   |      |                   |      |      |  |
|                                |                  |   |      |                   |      |      |  |
| Distortion                     | THD              | P <sub>o</sub> =0.5W R <sub>L</sub> =8<br>f=1kHz V <sub>cc</sub> =9V  |      | 0.3               |      | %    |  |
| Closed Loop Voltage Gain       | A <sub>vf</sub>  | f=1kHz  |      | 40                |      | dB   |  |
| Channel Balance                | ΔA <sub>vf</sub> |   |      |                   | ± 1  | dB   |  |
| Input Resistance               | R <sub>i</sub>   | f=1kHz  | 100  |                   |      | k    |  |
| Total Input Noise              | V <sub>NI</sub>  | R <sub>s</sub> =10k B=Cure A  |      | 2                 |      | μV   |  |
|                                |                  | R <sub>s</sub> =10k B=22Hz to22kHz  |      | 3                 |      |      |  |
| Supply Voltage rejection       | SVR              | f=100Hz C1=C2=100 μF  | 24   | 30                |      | dB   |  |
| Channel Separation             | CSR              | f=1kHz  |      | 50                |      | dB   |  |

URL:<http://www.szsanjing.com>

----- TEL: 0755-29663136

FAX: 0755-29663137-----


**2. Bridge Test Circuit** (Unless otherwise specified  $V_{cc}=6V, T_{amb}=25^{\circ}C$ )

| Characteristic                              | Symbol   | Test Condition   | Min. | Typ.                  | Max.     | Unit    |
|---|----------|--|------|-----------------------|----------|---------|
| Supply Voltage                              | $V_{cc}$ |  | 1.8  |                       | 12       | V       |
| Quiescent Drain Current                     | $I_d$    | $R_L=\infty$   |      | 6                     | 9        | mA      |
| Output Offset Voltage (Between the Outputs) | $V_{os}$ | $R_L=8$  |      |                       | $\pm 50$ | mV      |
| Input Bias Current                          | $I_b$    |  |      | 100                   |          | nA      |
| Output Power                                | $P_o$    | $d=10\% \quad f=1kHz$<br>$V_{cc}=9V \quad R_L=16$<br>$V_{cc}=6V \quad R_L=8$<br>$V_{cc}=4.5V \quad R_L=8$<br>$V_{cc}=4.5V \quad R_L=4$ |      | 2<br>1.35<br>0.7<br>1 |          | W       |
|   |          | $V_{cc}=3V \quad R_L=4$<br>$V_{cc}=2V \quad R_L=4$   | 200  | 350<br>80             |          | mW      |
| Distortion                                  | THD      | $P_o=0.5W \quad R_L=8 \quad f=1kHz$  |      | 0.2                   |          | %       |
| Closed Loop Voltage Gain                    | $A_{vf}$ | $f=1kHz$   |      | 40                    |          | dB      |
| Input Resistance                            | $R_i$    | $f=1kHz$   | 100  |                       |          | k       |
| Total Input Noise                           | $V_{NI}$ | $R_s=10k \quad \text{Curve A}$   |      | 2.5                   |          | $\mu V$ |
|   |          | $R_s=10k \quad B=22Hz \text{ to } 22kHz$   |      | 3                     |          |         |
| Supply Voltage Rejection                    | SVR      | $f=100Hz$  |      | 40                    |          | dB      |
| Power Bandwidth (-3dB)                      | B        | $R_L=8 \quad P_o=1W$   |      | 120                   |          | kHz     |


www.DataSheet4U.com

**URL: <http://www.szsanjing.com>**
**----- TEL: 0755-29663136**
**FAX: 0755-29663137-----**




**TEST CIRCUIT**

**1.STEREO TEST CIRCUIT**

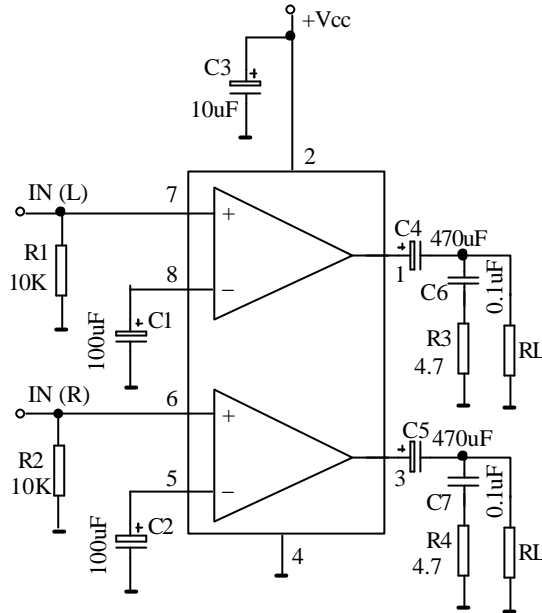

**2.BRIDGE TEST CIRCUIT**

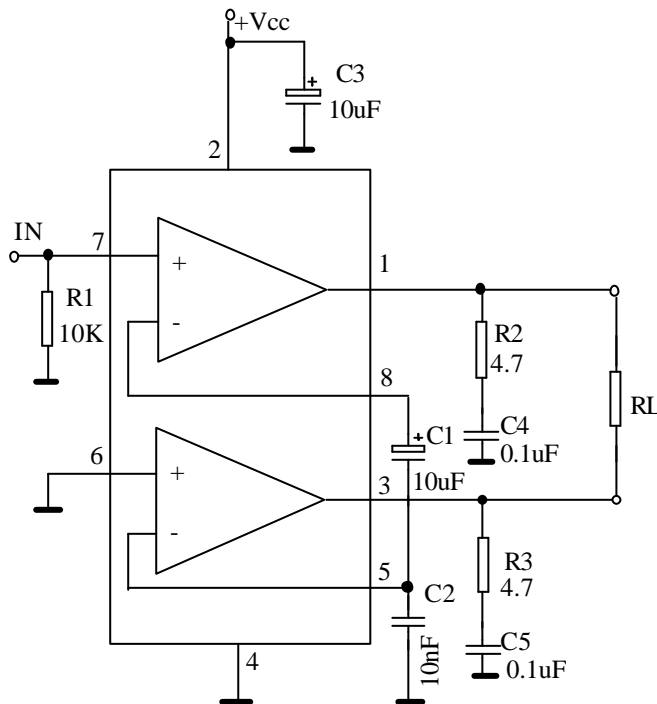

www.DataSheet4U.com

**URL: <http://www.szsanjing.com>**


----- **TEL: 0755-29663136**

**FAX: 0755-29663137** -----





**APPLICATION CIRCUIT**

**1. Typical application in portable players**

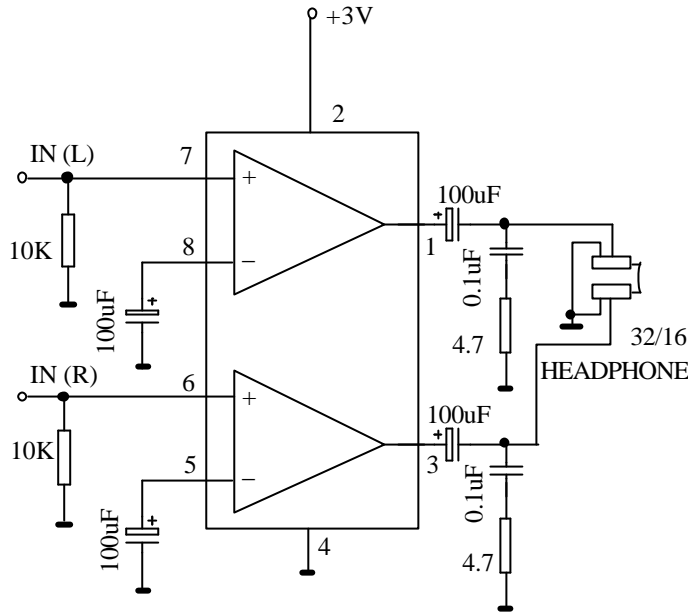

**CHARACTERISTICS CURVES**

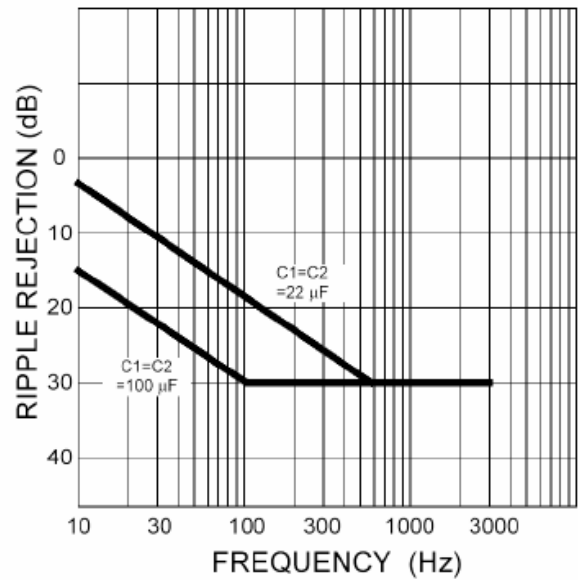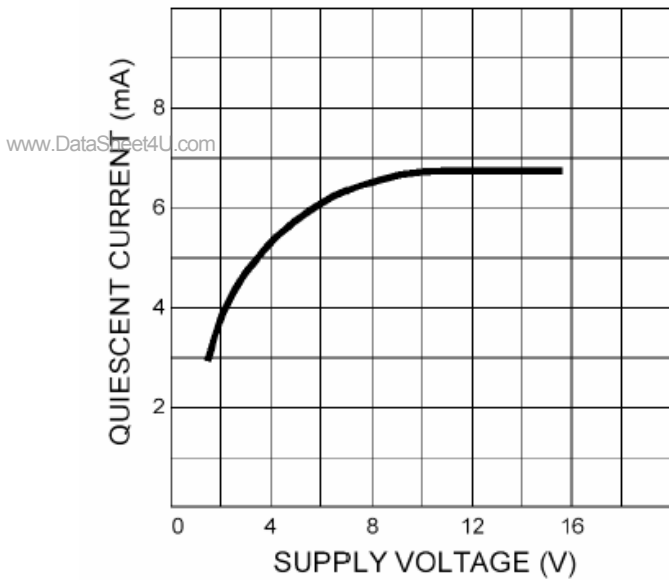

URL: <http://www.szsanjing.com>

----- TEL: 0755-29663136


FAX: 0755-29663137 -----




# SAN JING ELECTRONICS CO.,LTD SJ2822M

## OUTLINE DRAWING :

### 1、(DIP)

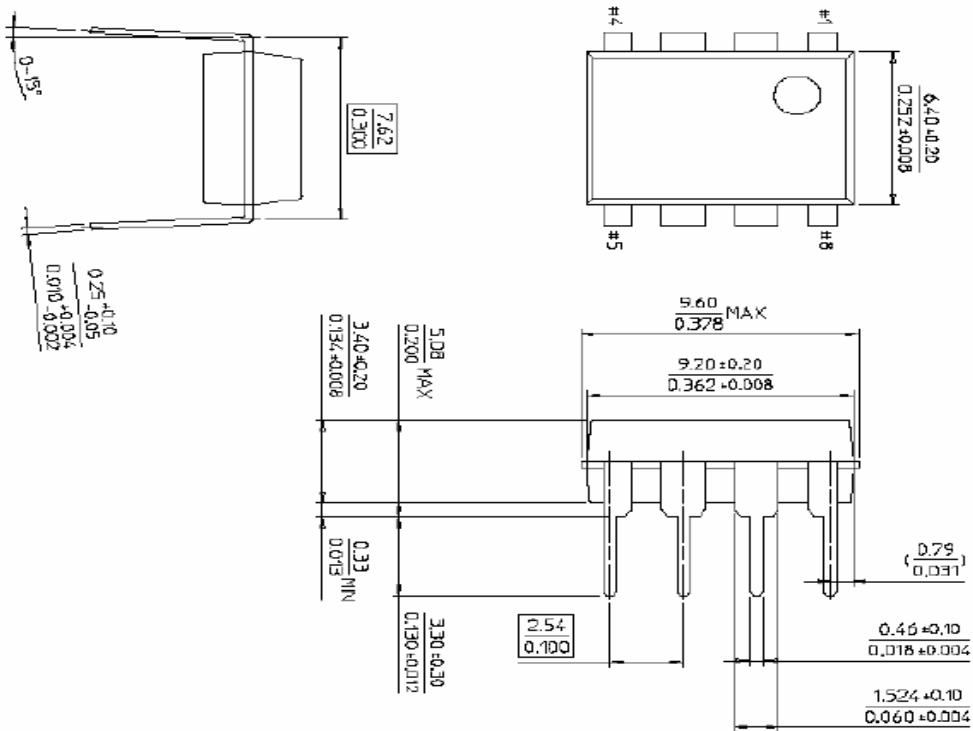

### 2、(SOP)

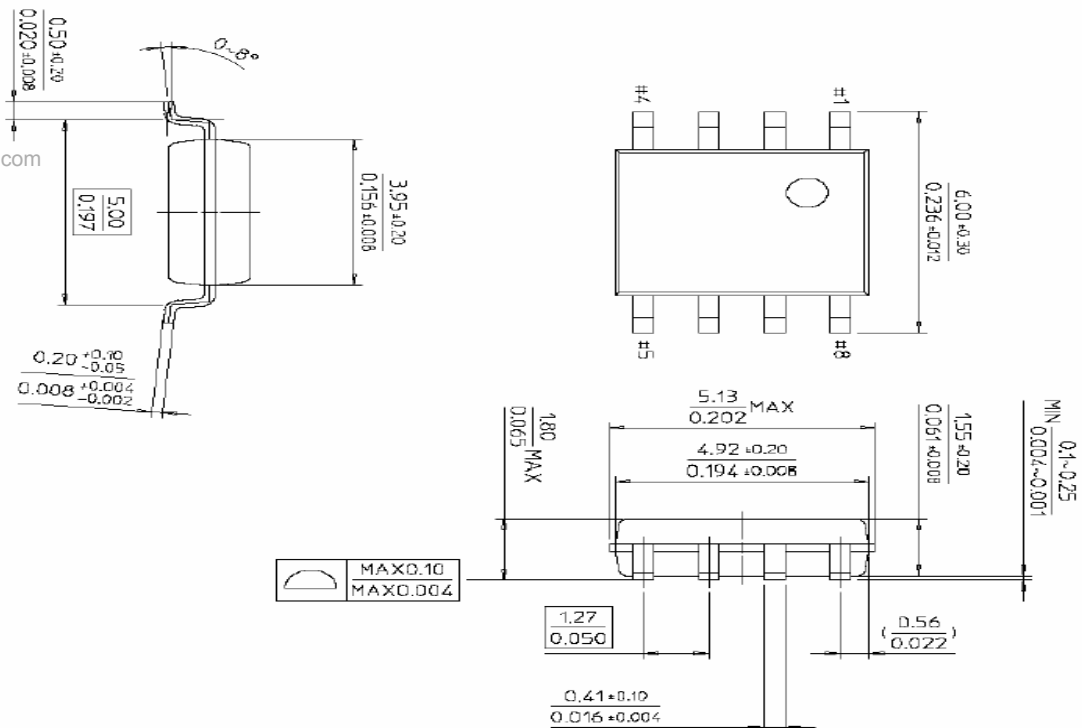

URL: <http://www.szsanjing.com>

TEL: 0755-29663136

FAX: 0755-29663137