

## Linear Hall Effect Sensor IC

### Features


- Wide operating range 3.0 V ~ 12 V, -40°C ~ 125°C
- Flat Response to 23 kHz
- Low Null Gauss output drift, typical  $\pm 0.3$  mV/°C
- Wide sensible magnetic field range on different supplied voltage:
  - $\pm 1,000$  Gauss on 5 V supplied voltage
  - $\pm 2,500$  Gauss on 12 V supplied voltage
- Two package styles TO-92S/SOT-23 available

### Functional Description


The WSH135 integrates Hall sensing element, linear amplifier, sensitivity controller and emitter follower output stage. It accurately tracks extremely small change in magnetic flux density which is generally too small to operate Hall effect switch.


WSH135 can be applied as current sensor, tooth sensor, proximity detectors and motion detectors. As sensitive monitor of magnetic flux, it can effectively measure the performance of system with negligible system loading while providing isolation from contaminated and electrically noisy environments.

### Function Block

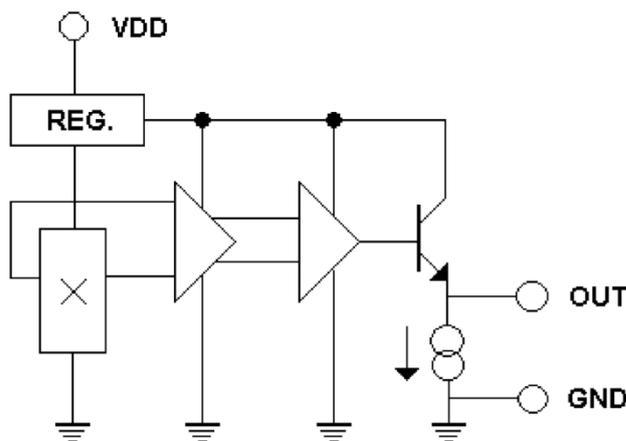

OUT vs. Megnetic Flux

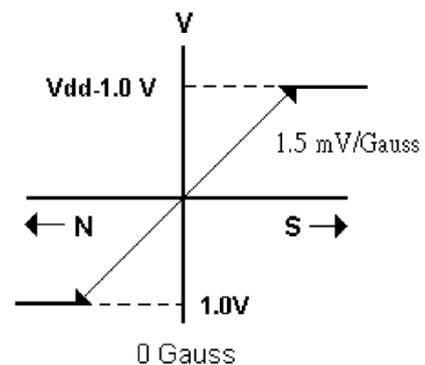

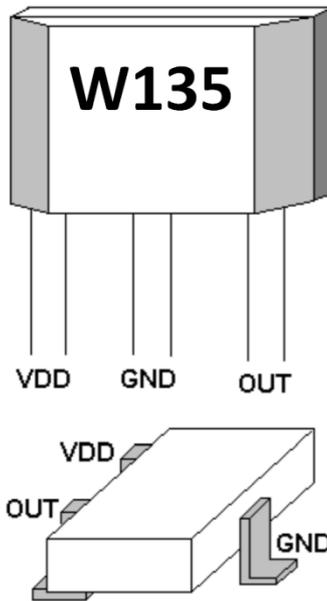

### Absolute Maximum Range

Supply Voltage, Vdd	14V
Magnetic Flux Density, B	Unlimited
Output Driving Current, Iout	2mA
Operating Temperature Range, Ta	-40°C to +125°C
Storage Temperature Range, Ts	-65°C to +150°C
Power Dissipation, Pd	
TO-92S	500mW
SOT-23	400mW

### Order Information

WSH135-XPAN□ (TO-92S)	1: A Grade
WSH135-XPCN□ (SOT-23)	2: B Grade
↑ Grade	
Halogen Free	


### Electrical Characteristics

( T = +25 °C, Vdd = 5 V )

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Supply Voltage	Vdd	—	3.0	—	12	V
Supply Current	Isupply	B = 0 Gauss	—	3.5	6.0	mA
Quiescent Vout	V0G	B=0G (Grade A)	2.45	2.5	2.55	V
		B=0G (Grade B)	2.35	2.5	2.65	V
Sensitivity	$\Delta V_{out}$	B = 0 to $\pm 1000$ G	1.3	1.5	1.7	mV/G
Bandwidth	BW	—	—	23	—	kHz
Measurable Gauss Range	MGR	Vdd = 5 V	—	$\pm 1000$	—	Gauss
		Vdd = 12 V	—	$\pm 2500$	—	Gauss
Temperature Drift	$\Delta V_{out}$	B = 0 Gauss	—	$\pm 0.3$	—	mV/°C
Output Noise	V <sub>Np-p</sub>	—	—	2.5	—	mV


1. All output-voltage measurements are made with a voltmeter having an input impedance of at least 100 k $\Omega$
2. Do not apply any "resistor load" on output pin, it will degrade IC's performance.

### Application Circuit

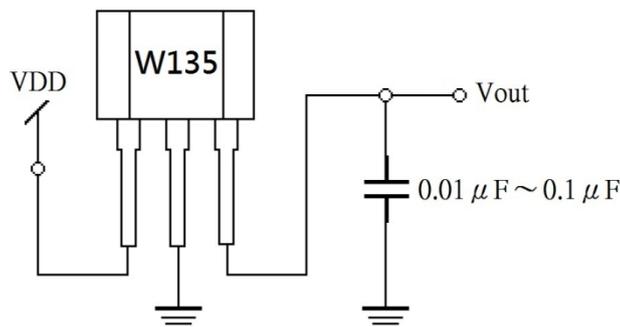


Winson reserves the right to make changes to improve reliability or manufacturability.

### Hall Device Sensing Direction

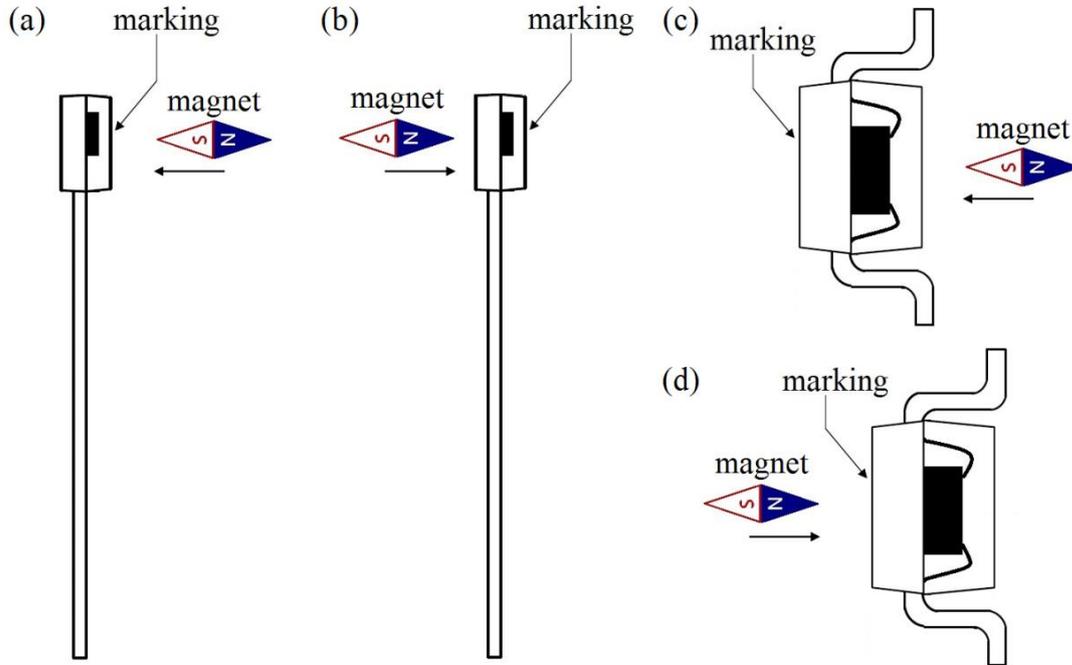


### Package Information

《TO-92S》

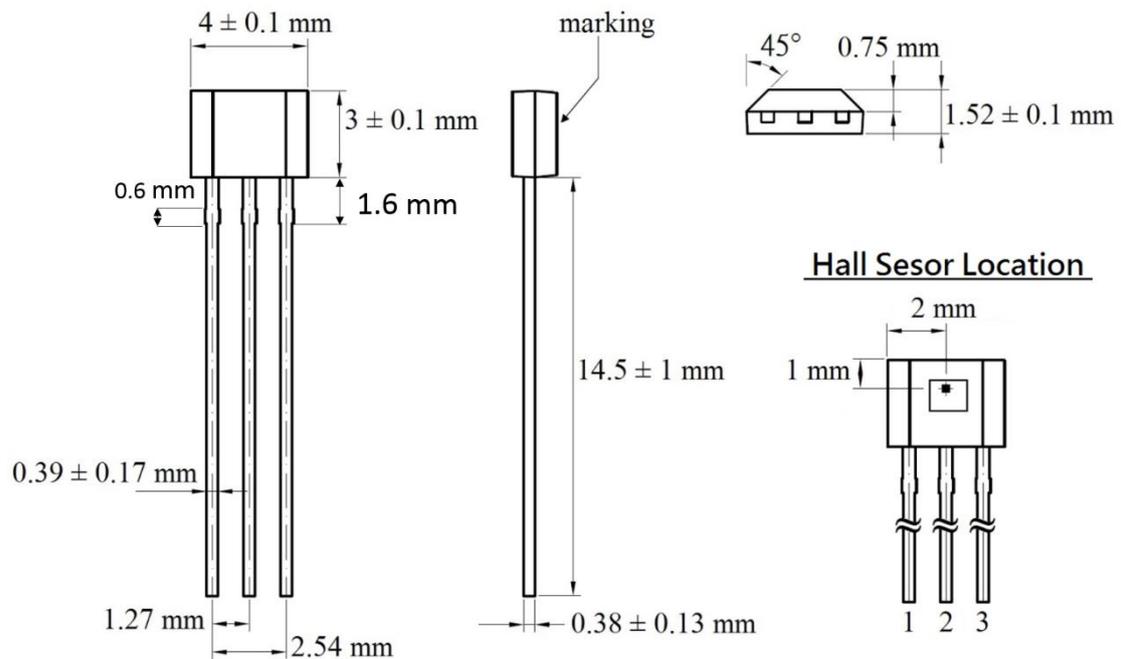

Winson reserves the right to make changes to improve reliability or manufacturability.



《SOT-23》

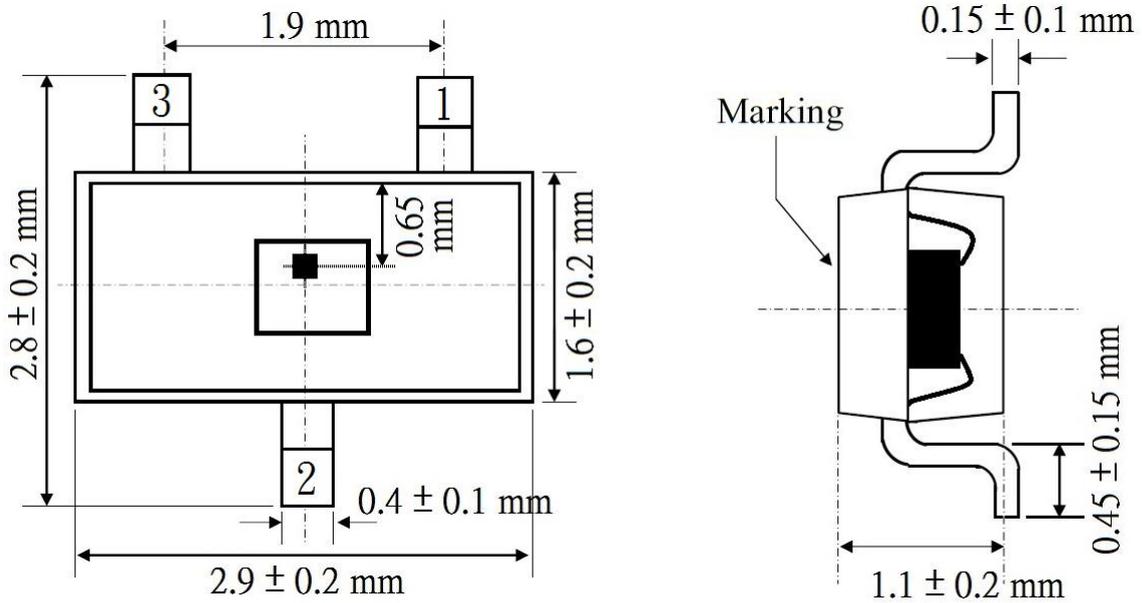

**PCB Layout Reference View**




SOT-23

TO-92S

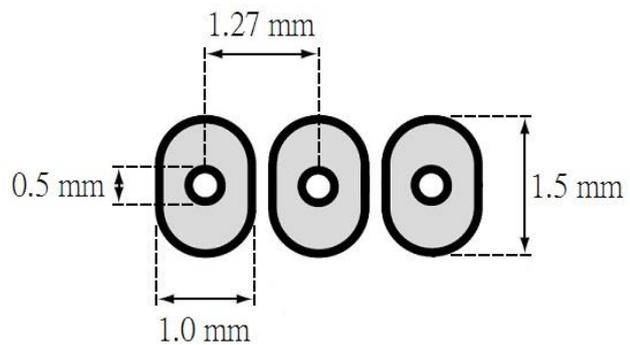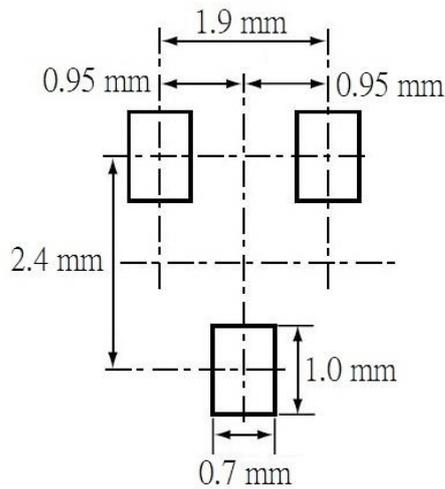

**Characteristic Diagrams**

Winson reserves the right to make changes to improve reliability or manufacturability.

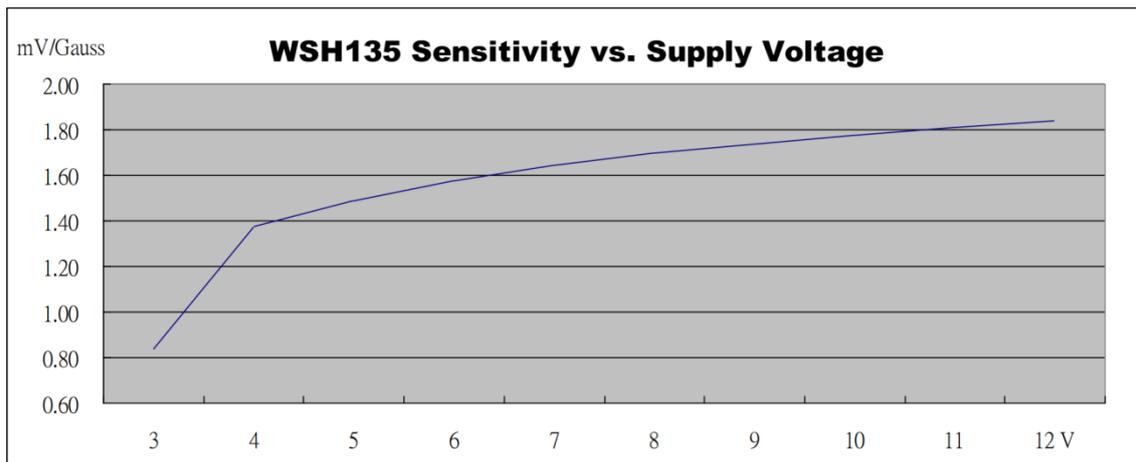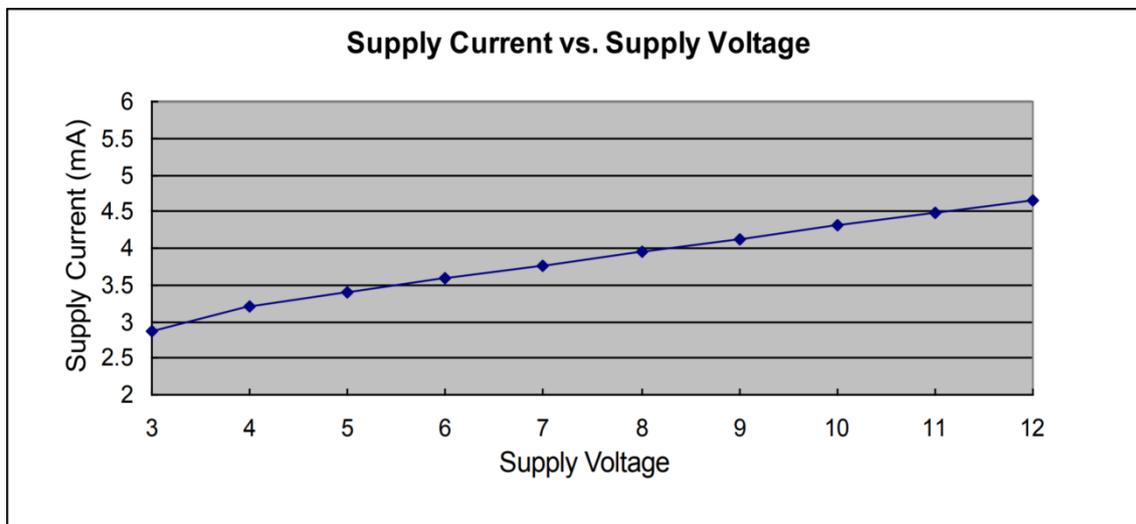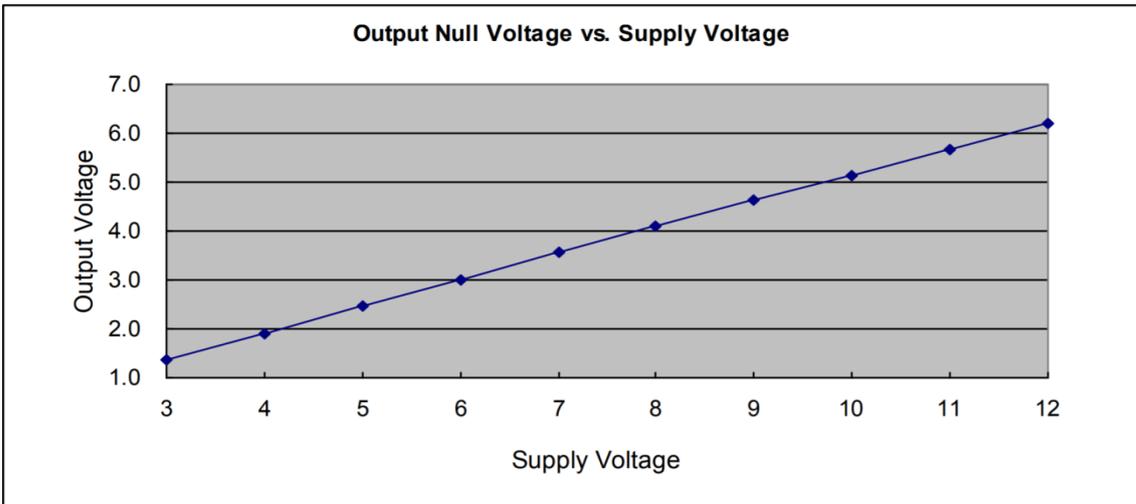

**Precautions for the use of Hall Sensor IC:** please refer to Winson Website->

Products->Application Note ->Hall Sensor IC Application Note:

<http://www.winson.com.tw/Product/83>

Winson reserves the right to make changes to improve reliability or manufacturability.