

## ▶ Product Introduction

### Token (XT MT) are Murata Triple Trap Filters TPT Compatible.

#### (XT MT) Triple Trap Filter Quick Selection :

- Dimensions (Unit: mm): 10.0 max × 8.0 max × 4.0 max.
- XT01MT Cener Frequency  $f_{01}$ :5.500MHz;  $f_{02}$ :6.000MHz;  $f_{03}$ :6.500MHz; 30db min @ $f_{01}$ &  $f_{02}$ ; &  $f_{03}$ ; 50(kHz)min@ $f_{01}$  30dB Att BW
- XT02MT Cener Frequency  $f_{01}$ :5.500MHz;  $f_{02}$ :5.742MHz;  $f_{03}$ :6.500MHz; 30db min @ $f_{01}$ &  $f_{02}$ ; &  $f_{03}$ ; 50(kHz)min@ $f_{01}$  30dB Att BW
- XT03MT Cener Frequency  $f_{01}$ :5.500MHz;  $f_{02}$ :5.742MHz;  $f_{03}$ :6.000MHz; 30db min @ $f_{01}$ &  $f_{02}$ ; &  $f_{03}$ ; 50(kHz)min@ $f_{01}$  30dB Att BW

#### Features :

- Good performance of attenuation, three-terminals trap filter, and space saving for Multi set.

The characteristic of a three-terminal ceramic trap equals two two-terminal ceramic traps. Three-terminal ceramic trap has a monolith structure formed from 2 ceramic resonators.

Trap filter is a ceramic filter passes only particular frequency. To the contrary, Band Eliminate Filter (B. E. F.) which blocks or attenuates particular frequency is called trap.

Sound trap for TV set is one of the famous examples of B. E. F. In TV set, video signal is used in picture amplitude circuit after video signal detection block, ceramic resonator is inserting here and trap circuit is formed in order to eliminate sound signal involved in video signal.


Token (XT MT) Ceramic Trap Filters (compatible to Murata TPT) series consist of 3 wafers with 3 trap frequencies. Recommended for Multi standard sets.

Full line products meet RoHS compliant. Token will also produce devices outside these specifications to meet specific customer requirements, contact us with your specific needs. For more information, please link to Token official website "[Ceramic Trap Filters](http://www.token.com.tw)".



## Dimensions

### Dimensions (XT MT)

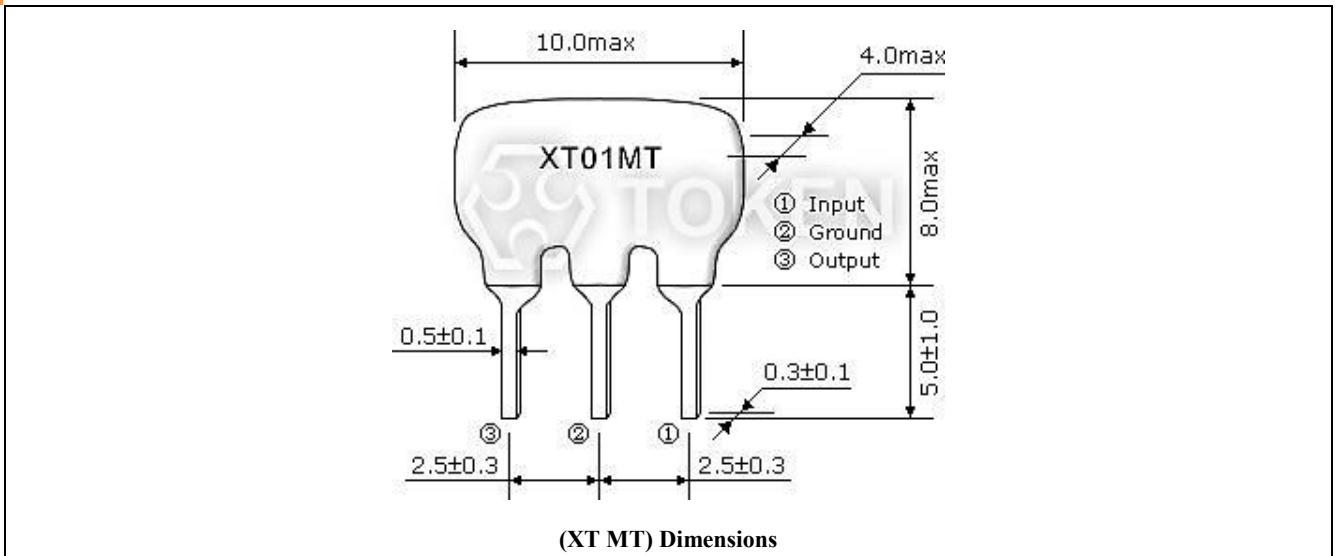

## Characteristics


### Characteristics (XT MT)

| Part Number | Center Frequency (fo1)(MHz) | Center Frequency (fo2)(MHz) | Center Frequency (fo3)(MHz) | Attenuation (at fo1) (dB)min | Attenuation (at fo2) (dB)min | Attenuation (at fo3) (dB)min | 30dB Attenuation BW (fo1)(kHz)min |
|-------------|-----------------------------|-----------------------------|-----------------------------|------------------------------|------------------------------|------------------------------|-----------------------------------|
| XT01MT      | 5.500                       | 6.000                       | 6.500                       | 30                           | 30                           | 30                           | 50                                |
| XT02MT      | 5.500                       | 5.742                       | 6.500                       | 30                           | 30                           | 30                           | 50                                |
| XT03MT      | 5.500                       | 5.742                       | 6.000                       | 30                           | 30                           | 30                           | 50                                |

- The level at 1MHz shall be made for a reference (0dB).

## ▶ Test Circuit

### Test Circuit (XT MT)

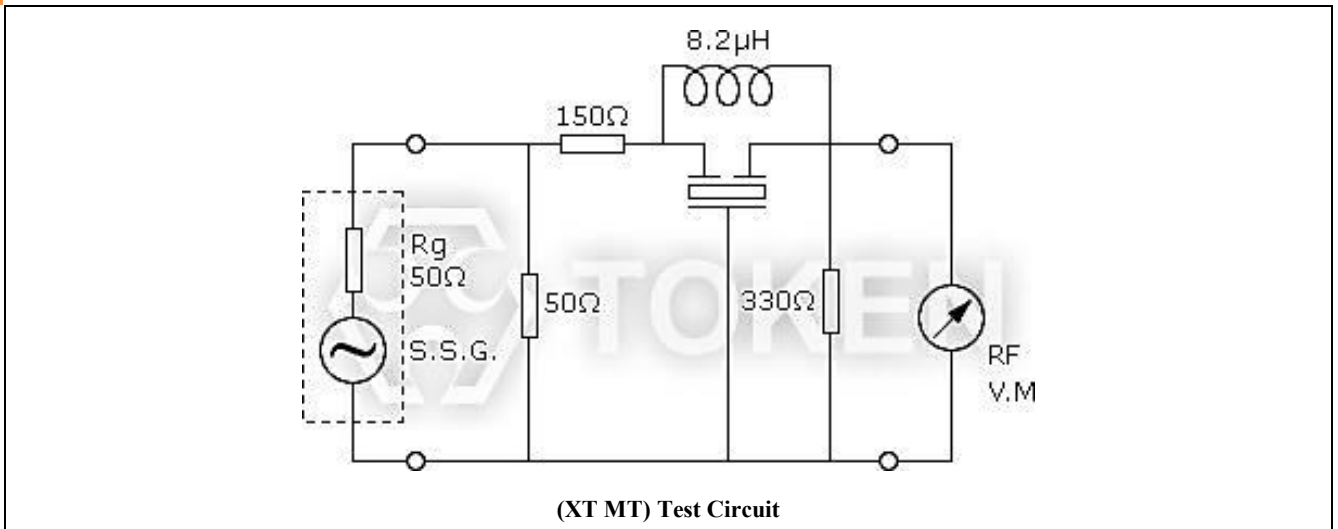

## ▶ Order Codes

### Order Codes (XT MT)

|             |         |
|-------------|---------|
| XT02MT      | P       |
| Part Number | Package |

## ▶ General Information

### Advantage of Token Piezoelectric Trap Filters

Token Electronics had been able to develop specialized piezo materials which when combined with an advance design have resulted in a complete line of practical, inexpensive piezo devices for entertainment and communications applications.

Token reliably deliver high-quality components according to the each customer special needs with respect to performance, costs, and technology modifications.

For marketing discontinuations or sourcing activities concerning Piezoelectric "Trap" products, you are encouraged to contact our Sales Department so the request can be properly directed within Token.