

2W DUAL CHANNEL AUDIO POWER AMPLIFIER—YD1316


DESCRIPTION

The YD1316 is a monolithic integrated circuit designed for the audio amplifier in tape recorders and radio.

FEATURES

- *Wide operating voltage ($V_{CC}=3V$ to $16V$);
- *Low quiescent current;
- *Low Harmonic distortion;
- *Large output power ($P_o=2W \times 2$, maximum, $V_{CC}=12V$, $R_L=8\ \Omega$, THD=10%);
- *Fine ripple rejection characteristic.

BLOCK DIAGRAM

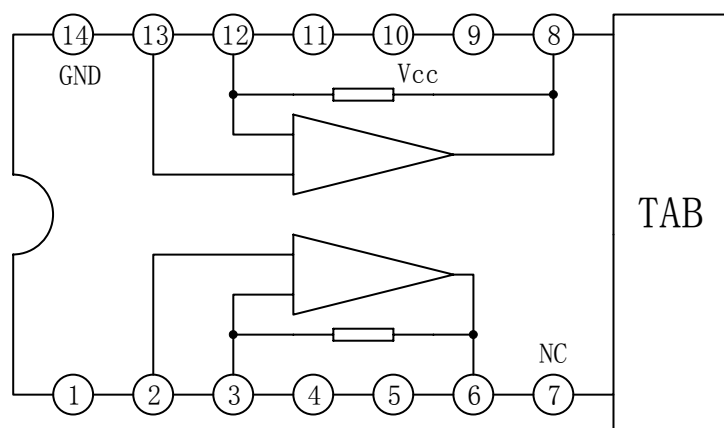

WuXi YouDa Electronics Co., Ltd

Add: No.5 Xijin Road, National Hi-Tech Industrial Development Zone, Wuxi Jiangsu China
 Tel: 86-510-85205117 86-510-85205106 Fax: 86-510-85205110 Website: www.e-youda.com
 SHENZHEN OFFICE Tel: 86-755-83740369 Fax: 86-755-83741418

ABSOLUTE MAXIMUM RATINGS ($T_{amb}=25^{\circ}\text{C}$)


PARAMETER		SYMBOL	VALUE	UNIT
Supply Voltage (No signal)		V_{CC}	18	V
Supply Voltage (operating)		V_{CC}	16	V
Peak Output Current		I_{op}	1.25	A
Power Dissipation	80*60*1.2mm ³ PCB	P_{D1}	3.0	W
	No Heat Sink	P_{D2}	1.5	W
Operating Temperature		T_{opr}	-20 to +75	$^{\circ}\text{C}$
Storage Temperature		T_{stg}	-55 to 150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

($T_{amb}=25^{\circ}\text{C}$, $V_{CC}=9\text{V}$, $R_L=8\ \Omega$, $R_f=120\ \Omega$, $f=1\text{kHz}$, Unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Quiescent Circuit Current	I_{ccq}	No Signal		10		mA
Voltage Gain	G_V	$P_o=0.25\text{W}$, $R_f=33\ \Omega$		44		dB
		$P_o=0.25\text{W}$, $R_f=120\ \Omega$		34		
Output Power	P_o	$V_{CC}=12\text{V}$, $R_L=8\ \Omega$, THD=10%		2		W
		$V_{CC}=9\text{V}$, $R_L=4\ \Omega$, THD=10%		1.6		
		$V_{CC}=9\text{V}$, $R_L=8\ \Omega$, THD=10%		1.2		
		$V_{CC}=6\text{V}$, $R_L=4\ \Omega$, THD=10%		0.7		
		$V_{CC}=6\text{V}$, $R_L=8\ \Omega$, THD=10%		0.5		
Total Harmonic Distortion	THD	$P_o=0.5\text{W}$, $R_f=33\ \Omega$		0.8	1.0	%
		$P_o=0.5\text{W}$, $R_f=120\ \Omega$		0.4		
Noise Output Voltage	V_{NO}	$R_g=10\text{k}\ \Omega$		0.6	4	mV
Ripple Rejection	RR	$R_g=0$, $f_r=100\text{Hz}$, $V_r=0.3\text{V}$		50		dB
Cross Talk	CT	$R_g=0$, $P_o=0.25\text{W}$		55		dB
Channel Balance	ΔG_V	Crip	-2	0	2	dB
Input Resistance	Z_i			5		$\text{M}\ \Omega$

APPLICATION CIRCUIT

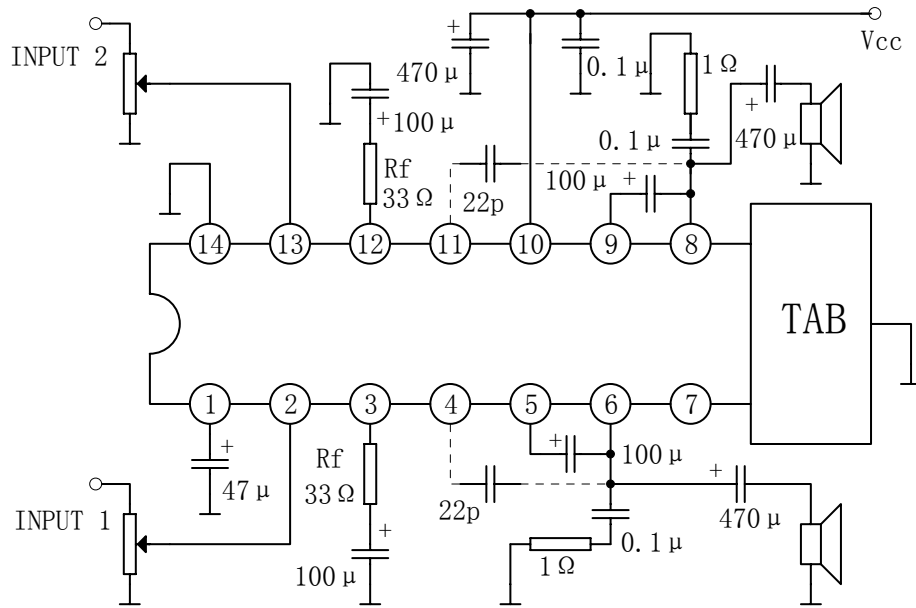

OUTLINE DRAWING

