

ZL60009 PIN/Preamp 1300 nm-1550 nm

Data Sheet

June 2004



Features

- Data rate up to 200 Mbps
- 1310 1550 nm PIN
- TO-46 Assembly
- TIA with AGC
- Single 3.3 V supply
- Low power consumption

Applications

- Sonet OC-3
- SDH STM-1
- ATM 155 Mbps
- FDDI, Ethernet




Figure 1 - Pin Diagram

Ordering Information

ZL60009/TBD TO-46 with lens

-40°C to +85°C

Description

This optical receiver is a 3.3 V device which contains a PIN photodiode and a low noise transimpedance amplifier assembled in a TO-46 package. It is designed for OC-3/STM-1 operation. Its optical system is designed for single mode fiber as well as for multi mode fiber with a core diameter up to 62.5 μ m. Reliability Assurance based on Telcordia GR-468-CORE.




Figure 2 - Functional Schematic

Zarlink Semiconductor Inc. Zarlink, ZL and the Zarlink Semiconductor logo are trademarks of Zarlink Semiconductor Inc.

Copyright 2003 - 2004, Zarlink Semiconductor Inc. All Rights Reserved.

Optical and Electrical Characteristics

Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Responsivity, differential	R	13	39		kV/W	λ=1310 nm R _L = 100 Ω, Note 1
Output Voltage amplified, differential	∆V _O		270		mV _{pp}	R _L = 100 Ω, Note 2
Bandwidth (3 dB _{el)}	f _c		140		MHz	P _f = 10 μW, RL=100 Ω
Optical Saturation level, (average)		0	3		dBm	λ =1310 nm ER = ∞ , Note 3
Noise-Equivalent Power	NEP		-47		dBm	λ=1310 nm, Note 4
Dynamic Range			40		dB	
Sensitivity (BER 10 ⁻⁹)	S		-37	-36	dBm	λ =1310 nm ER = ∞ , Note 3, 5
Output Resistance (single)	R ₀		40	100	Ω	
Power Dissipation	PD		72	115	mW	
Power Supply Current	I _{DD}		22	32	mA	

Operating Conditions: 25°C Case Temperature/3.3 V Supply Voltage/Fiber: Single-mode to multi-mode 62.5/125 μ m fiber

Note 1: $P_f = 2\mu W$ Peak-Peak power at 10 MHz 50% duty cycle

Note 2: $P_f = 100 \mu W$ Peak-Peak average Power at 10 MHz 50% duty cycle

Note 3: Measured at 10⁻⁹BER with a 2²³-1 PRBS at 155 Mbps

Note 4: Measured with STM-1 filter on electrical output i.e. 116 MHz

Note 5: Penalty at 10⁻¹⁰ BER equals 0.26dB

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V _{CC}	-0.5	4.5	V
Storage Temperature	T _{stg}	-55	125	°C

Recommended Operating Conditions

Parameter	Symbol	Min.	Тур.	Max.	Unit
Supply Voltage	V _{CC}	3	3.3	3.6	V
Output Differential Load, Note 6	R _L	100	1000		Ω
Operating Temperature	T _{op}	-40		85	°C

Note 6: The typical value corresponds to the load prevented by a following limiting amplifier.

Typical Responsivity

		Fiber Core/Cladding Diameter Numerical Aperture			
	Wavelength	10/125 μm, NA=0.11	50/125 μm, NA=0.20	62.5/125 μm, NA=0.275	
Differential responsivity	1310 nm	39 kV/W	39 kV/W	39 kV/W	
Differential responsivity	1550 nm	47 kV/W	47 kV/W	47 kV/W	




Figure 3 - Typical Responsivity Versus Axial Displacement for a Multimode Fiber




Figure 4 - Typical Responsivity Versus Radial Displacement for a Multimode Fiber




Figure 5 - Responsivity Versus Wavelength of Coupled Input Power

Application Guidelines



ESD Handling

The receiver is sensitive to electrostatic discharges. When handling the device, precaution for ESD sensitive devices should be taken. These precautions include use of ESD protected work area with wrist straps, controlled work benches, floors etc.

Power Supply Filter

Power Supply decoupling capacitors are recommended for optimal performance of the receiver. A filter is recommended to minimise power supply noise. see Figure 7.

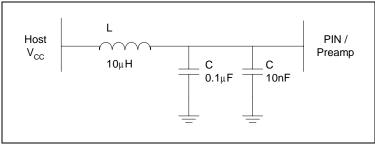


Figure 6 - Recommended Power Supply Filter

Data Outputs

Outputs, Data and Data, need to be AC-coupled according to Figure 8. The capacitor determines the low-frequency cut-off for the system.

For improved sensitivity the optional filter capacitor C_F should be chosen to constitute a 0.75*bit rate BW filter.


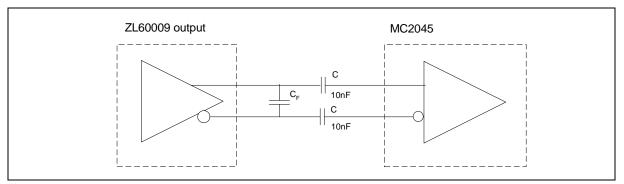


Figure 7 - Required coupling and filter capacitors



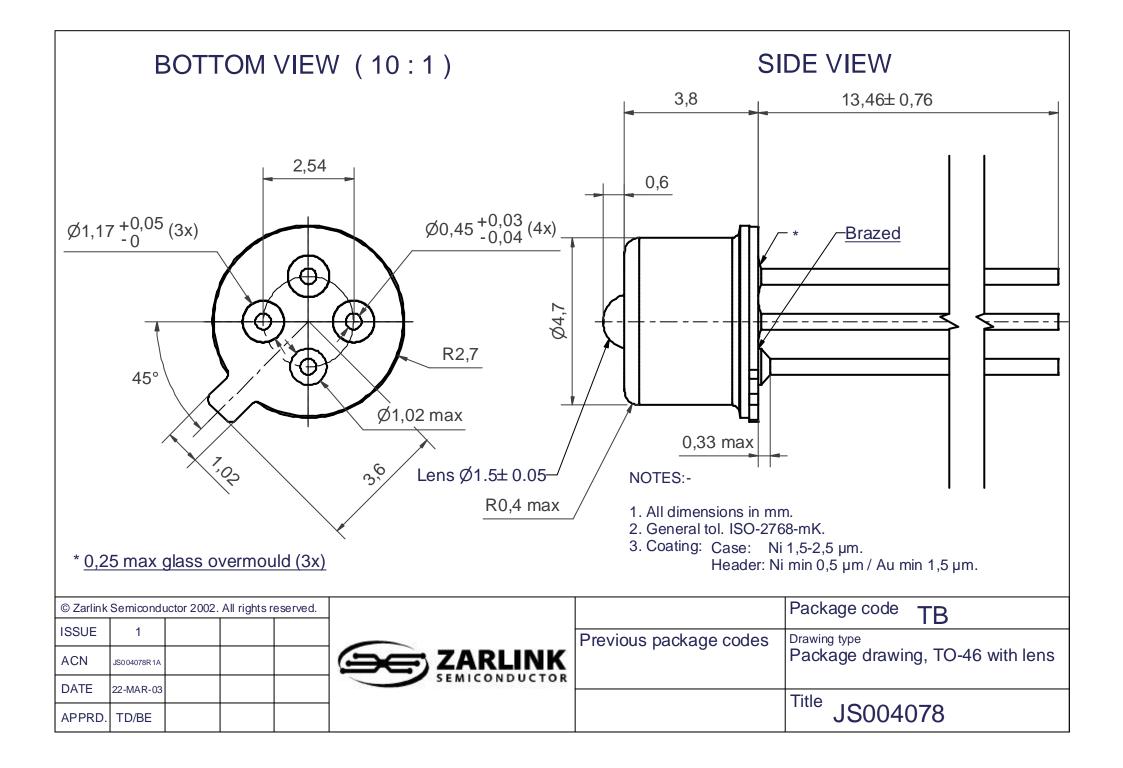

For more information about all Zarlink products visit our Web Site at

www.zarlink.com

Information relating to products and services furnished herein by Zarlink Semiconductor Inc. or its subsidiaries (collectively "Zarlink") is believed to be reliable. However, Zarlink assumes no liability for errors that may appear in this publication, or for liability otherwise arising from the application or use of any such information, product or service or for any infringement of patents or other intellectual property rights owned by third parties which may result from such application or use. Neither the supply of such information or purchase of product or service conveys any license, either express or implied, under patents or other intellectual property rights owned by Zarlink or licensed from third parties by Zarlink, whatsoever. Purchasers of products are also hereby notified that the use of product in certain ways or in combination with Zarlink, or non-Zarlink furnished goods or services may infringe patents or other intellectual property rights owned by Zarlink.

This publication is issued to provide information only and (unless agreed by Zarlink in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. The products, their specifications, services and other information appearing in this publication are subject to change by Zarlink without notice. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. Manufacturing does not necessarily include testing of all functions or parameters. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to Zarlink's conditions of sale which are available on request.

Purchase of Zarlink's I²C components conveys a licence under the Philips I²C Patent rights to use these components in and I²C System, provided that the system conforms to the I²C Standard Specification as defined by Philips.

Zarlink, ZL and the Zarlink Semiconductor logo are trademarks of Zarlink Semiconductor Inc.

Copyright Zarlink Semiconductor Inc. All Rights Reserved.

TECHNICAL DOCUMENTATION - NOT FOR RESALE