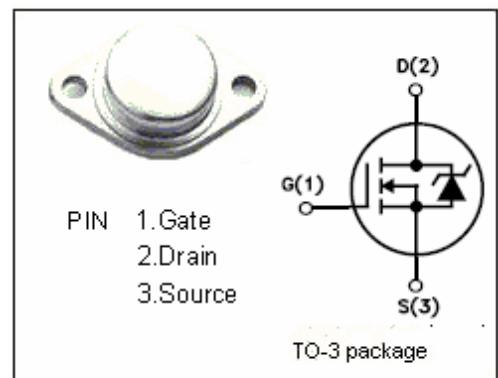


isc N-Channel MOSFET Transistor

6N55

DESCRIPTION


- Drain Current $I_D = 6.0A @ T_C=25^\circ C$
- Drain Source Voltage-
: $V_{DSS} = 550V$ (Min)
- Fast Switching Speed

**APPLICATIONS**

- General purpose power amplifier

ABSOLUTE MAXIMUM RATINGS($T_C=25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage ($V_{GS}=0$)	550	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-continuous@ $T_C=25^\circ C$	6.0	A
$I_{D(puls)}$	Pulse Drain Current	30	A
P_{tot}	Total Dissipation@ $T_C=25^\circ C$	150	W
T_j	Max. Operating Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-55~150	$^\circ C$

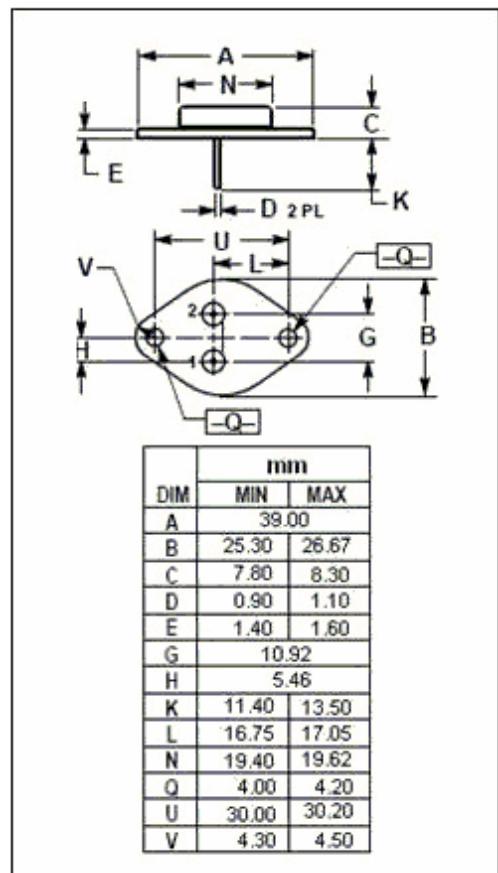**• THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	1.0	$^\circ C/W$
$R_{th j-a}$	Thermal Resistance, Junction to Ambient	62.5	$^\circ C/W$

isc N-Channel MOSFET Transistor

6N55

• ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYPE	MAX	UNIT
$V_{(\text{BR})\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{GS}=0$; $I_D=250\mu\text{A}$	550			V
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=V_{GS}$; $I_D=1\text{mA}$	2.0		4.5	V
V_{SD}	Diode Forward On-Voltage	$I_S=6.0\text{A}$; $V_{GS}=0$			1.3	V
$R_{DS(\text{on})}$	Drain-Source On-Resistance	$V_{GS}=10\text{V}$; $I_D=3\text{A}$			1.2	Ω
I_{GSS}	Gate-Body Leakage Current	$V_{GS}=\pm 20\text{V}$; $V_{DS}=0$			± 500	nA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=550\text{V}$; $V_{GS}=0$			200	μA