

isc N-Channel MOSFET Transistor


75N05

DESCRIPTION

- Drain Current $I_D = 75A @ T_C = 25^\circ C$
- Drain Source Voltage-
: $V_{DSS} = 50V(\text{Min})$
- Fast Switching Speed


APPLICATIONS

- General purpose power amplifier

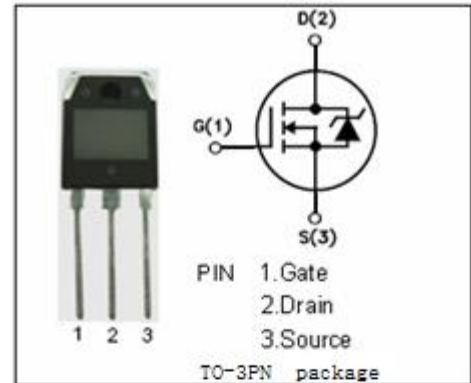

ABSOLUTE MAXIMUM RATINGS($T_C = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage ($V_{GS} = 0$)	50	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-continuous @ $T_C = 25^\circ C$	75	A
$I_{D(puls)}$	Pulse Drain Current	200	A
P_{tot}	Total Dissipation @ $T_C = 25^\circ C$	240	W
T_j	Max. Operating Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-55~150	$^\circ C$

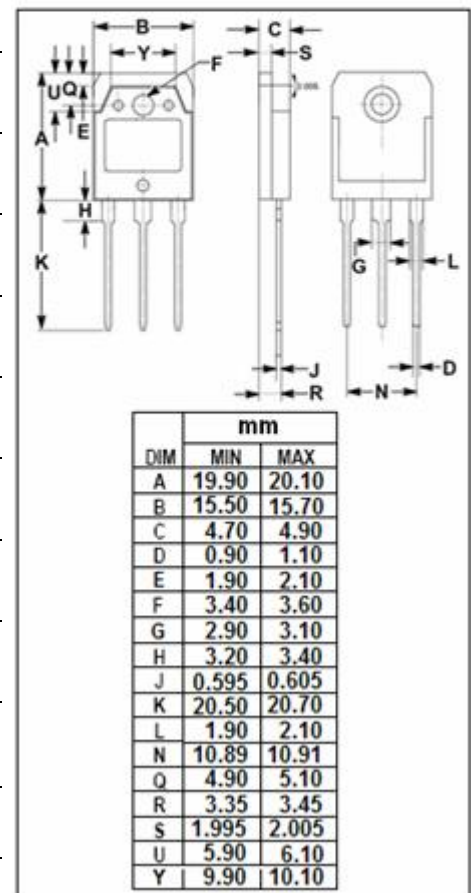

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	0.62	$^\circ C/W$
$R_{th j-a}$	Thermal Resistance, Junction to Ambient	80	$^\circ C/W$

isc N-Channel MOSFET Transistor**75N05**• ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYPE	MAX	UNIT
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0; I_D=250\mu\text{A}$	50			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}; I_D=250\mu\text{A}$	2.0		4.0	V
V_{SD}	Diode Forward On-Voltage	$I_S=75\text{A}; V_{GS}=0$			2.5	V
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS}=10\text{V}; I_D=75\text{A}$			0.01	Ω
I_{GSS}	Gate-Body Leakage Current	$V_{GS}=\pm 30\text{V}; V_{DS}=0$			± 100	nA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=40\text{V}; V_{GS}=0$			1	μA
t_r	Rise Time	$V_{GS}=10\text{V};$ $I_D=37.5\text{A};$ $V_{DD}=25\text{V};$ $R_L=0.67\Omega$		75		ns
$t_{d(on)}$	Turn-on Delay Time			17		
t_f	Fall Time			17		
$t_{d(off)}$	Turn-off Delay Time			70		