

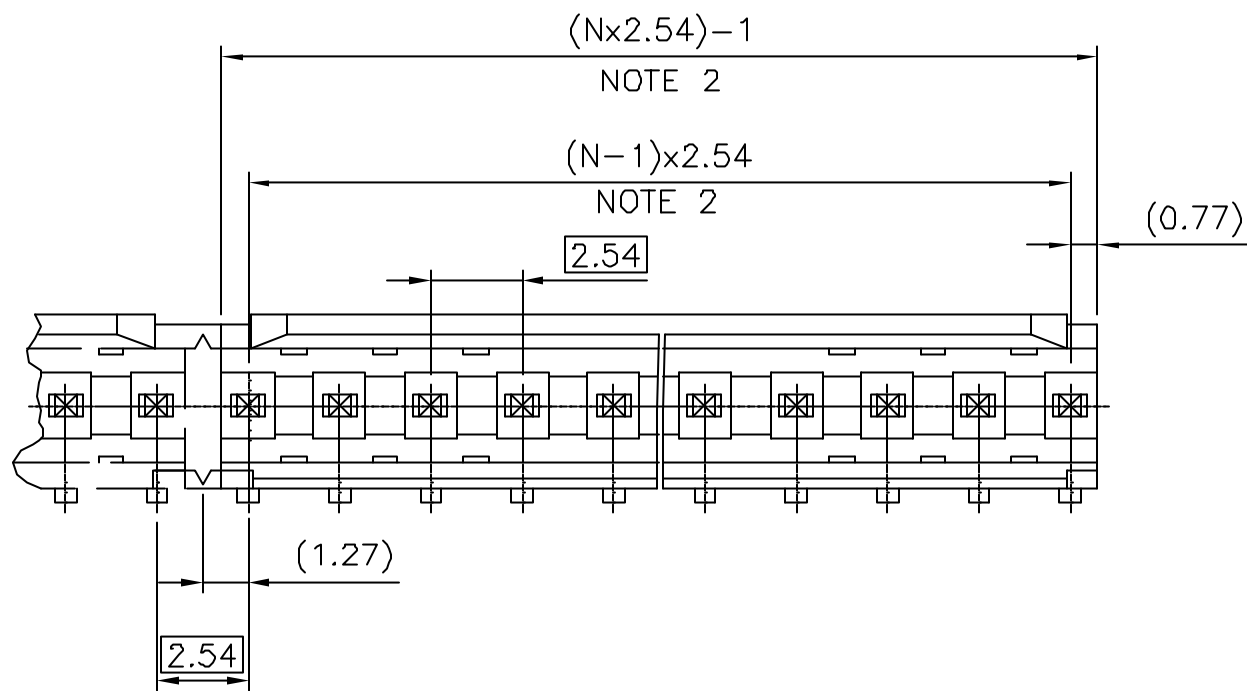
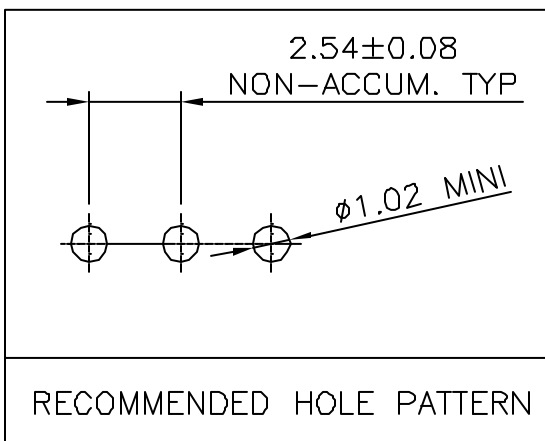


PRODUCT NUMBER
SEE SHEET 2

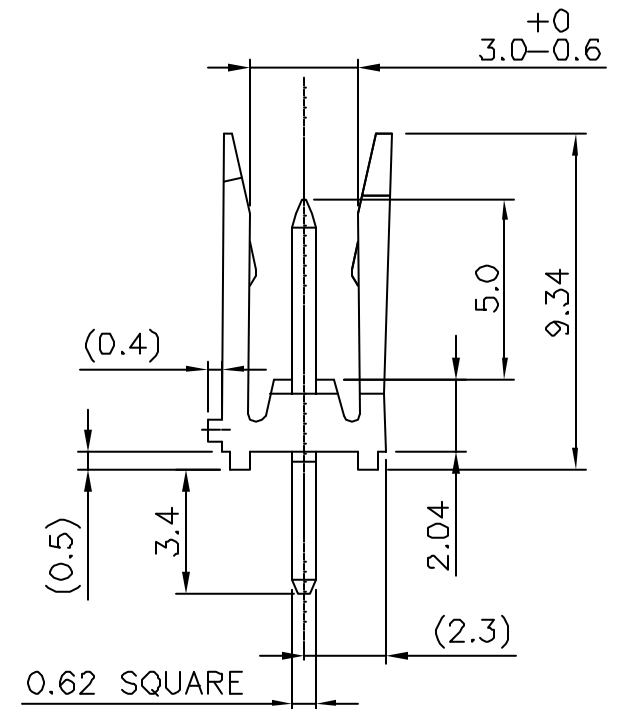

NOTES :

1. MINI PUSH-OUT FORCE TERMINAL IN BOTH DIRECTIONS 22N.
2. TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS PER ROW
EXAMPLE: 8 POS: (N×2.54)-1=19.32 mm

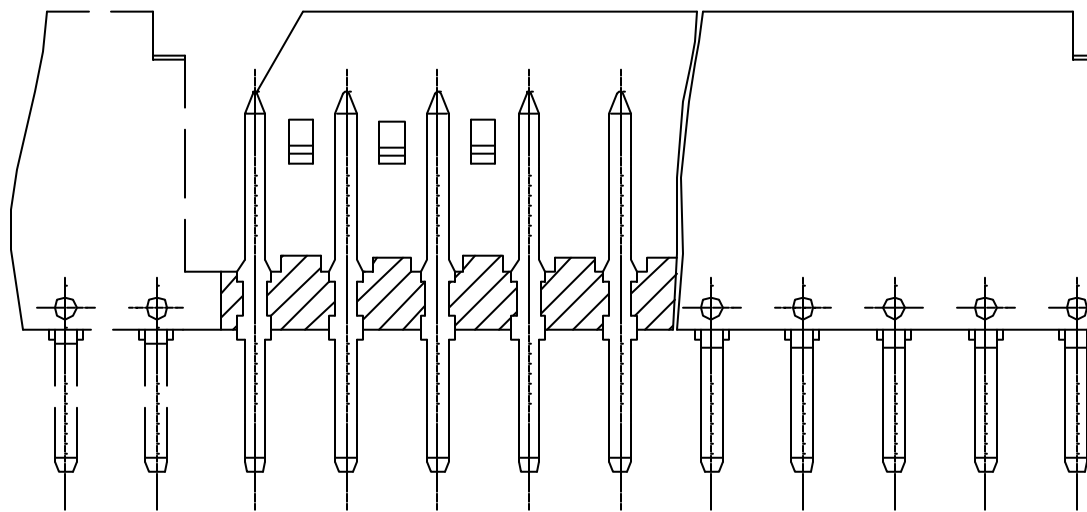

mat'l. code		surface		tolerance		projection		product family	
SEE NOTES		ISO 1302 ✓		ISO 406 ISO 1101		mm		DUBOX	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title	
N	F06-0228	LMU	06.07.11	angles	.X ±0.3	scale 5:1		SHR. HEADER	
P	F06-0319	LMU	06.11.10	Linear	.XX ±0.15			STR SR TMT	
					.XXX ±0.05			dwg no	
J	F10103	GCD	01.01.12	dr	D LEGRAND	99.03.03		sheet 1 of 2	
K	F10343	DLE	01.06.12	engr	JM PHAMVAN	99.03.03		size	
L	F04-0317	LMU	04.07.13	chr	JM PHAMVAN	99.03.03		A3	
M	F05-0159	LMU	05.03.31	appd	JM PHAMVAN	99.03.03		type	
sheet	revision	P	B					CUSTOMER Drawing	
index	sheet	1	2						



Copyright FCJ

STANDARD PRODUCT NUMBER
76384-YXX

PLATING CODE _____ NUMBER OF POSITIONS: 02 TO 36.
 3= 0.76µm GOLD ON CONTACT AREA.
 3.81µm TIN-LEAD ON TAIL OVER 1.27µm Ni MIN.
 4= 3.81µm TIN LEAD OVER 1.27µm Ni MIN

NOTES:

- 1 - HOUSING MAT'L: THERMOPLASTIC GLASS FILLED
FLAME RETARDANT PER UL 94 V-O COLOR: BLUE.
- 2 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 - 2 UP TO 6 POSITIONS, PRODUCT PACKED IN PLASTIC BAG.
7 UP TO 36 POSITIONS, PRODUCT PACKED IN TUBE.
- 4 - ONLY DASH NUMBER -X02 AND -X03
ALWAYS TEN (10) PRODUCTS MOLDED ASSEMBLY
& DELIVERY TOGETHER ACCORDING PHANTOM LINES.

RoHS COMPLIANT PRODUCT NUMBER
76384-YXXLF

PLATING CODE _____ SUFFIX LETTER "LF" INDICATES THE PRODUCT IS RoHS COMPLIANT, SEE NOTE 5
 3= 0.76µm GOLD ON CONTACT AREA.
 2µm MIN MATTE TIN ON TAIL.
 OVER 1.27µm Ni MIN
 4= 2µm MIN MATTE TIN
 OVER 1.27µm Ni MIN

NOTES:

- 1 - HOUSING MAT'L: THERMOPLASTIC GLASS FILLED
FLAME RETARDANT PER UL 94 V-O COLOR: BLACK.
- 2 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 - 2 UP TO 6 POSITIONS, PRODUCT PACKED IN PLASTIC BAG.
7 UP TO 18 POSITIONS, PRODUCT PACKED IN TUBE.
- 4 - ONLY DASH NUMBER -X02 AND -X03
ALWAYS TEN (10) PRODUCTS MOLDED ASSEMBLY
& DELIVERED ON STRIP ACCORDING PHANTOM LINES.
- 5 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C ±5°C SOLDER BATH TEMPERATURE FOR
5 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - c - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-22-008

mat'l. code		surface		tolerance		projection		product family	
SEE NOTES		ISO 1302 ✓		ISO 406 ISO 1101				DUBOX	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title	
A	F05-0159	LMU	05.03.31	angles	.X ±0.3	mm		SHR. HEADER	
B	F06-0228	LMU	06.07.11	Linear	.XX ±0.15	scale 5:1		STR SR TMT	
					.XXX ±0.05			dwg no	
				dr	LMULIN	05.03.25		sheet 2 of	
				engr	J.COMPAGNON	05.03.25		size	
				chr				76384	
				appd	JM.C	05.03.25		A3	
sheet index		revision sheet						type	
								CUSTOMER Drawing	



Copyright FCJ