

Major Ratings and Characteristics

Characteristics	82CNQ030A	Units
$I_{F(AV)}$ Rectangular waveform	80	A
V_{RRM}	30	V
I_{FSM} @tp = 5 μ s sine	5100	A
V_F @40Apk, T_J = 125°C (per leg)	0.37	V
T_J range	-55 to 150	°C

Description/Features

The 82CNQ030A center tap Schottky rectifier module has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150 °C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150 °C T_J operation
- Dual center tap module
- Very low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- *New fully transfer-mold low profile, small footprint, high current package*

Case Styles		
82CNQ...A  Diagram showing a center tap Schottky rectifier module with three terminals: ANODE 1 (1), COMMON CATHODE (2), and ANODE 2 (3). The package is labeled D61-8. D61-8	82CNQ...ASM  Diagram showing a center tap Schottky rectifier module with three terminals: ANODE 1 (1), COMMON CATHODE (2), and ANODE 2 (3). The package is labeled D61-8-SM. D61-8-SM	82CNQ...ASL  Diagram showing a center tap Schottky rectifier module with three terminals: ANODE 1 (1), COMMON CATHODE (2), and ANODE 2 (3). The package is labeled D61-8-SL. D61-8-SL

Voltage Ratings

Part number	82CNQ030A
V_R Max. DC Reverse Voltage (V)	30
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters		82CNQ	Units	Conditions		
$I_{F(AV)}$	Max. Average Forward Current * See Fig. 5	80	A	50% duty cycle @ $T_C = 119^{\circ}\text{C}$, rectangular waveform		
I_{FSM}	Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	5100	A	5 μs Sine or 3 μs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied	
		880		10ms Sine or 6ms Rect. pulse		
E_{AS}	Non-Repetitive Avalanche Energy (Per Leg)	36	mJ	$T_J = 25^{\circ}\text{C}$, $I_{AS} = 8\text{ Amps}$, $L = 1.12\text{ mH}$		
I_{AR}	Repetitive Avalanche Current (Per Leg)	8	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical		

Electrical Specifications

Parameters		82CNQ	Units	Conditions	
V _{FM}	Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.47	V	@ 40A	T _J = 25 °C
		0.55	V	@ 80A	
		0.37	V	@ 40A	T _J = 125 °C
		0.47	V	@ 80A	
I _{RM}	Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	5	mA	T _J = 25 °C	V _R = rated V _R
		280	mA	T _J = 125 °C	
C _T	Max. Junction Capacitance (PerLeg)	3700	pF	V _R = 5V _{DC} ; (test signal range 100Khz to 1Mhz) 25°C	
L _S	Typical Series Inductance (Per Leg)	5.5	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change (Rated V _R)	10,000	V/ μs		

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	82CNQ	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	0.85	$^\circ\text{C/W}$	DC operation * See Fig. 4
R_{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.42	$^\circ\text{C/W}$	DC operation
R_{thCS} Typical Thermal Resistance, Case to Heatsink (D61-8 Only)	0.30	$^\circ\text{C/W}$	Mounting surface, smooth and greased Device flatness < 5 mils
wt Approximate Weight	7.8(0.28)	g(oz.)	
T Mounting Torque (D61-8 Only)	Min.	40(35)	Kg-cm (lbf-in)
	Max.	58(50)	

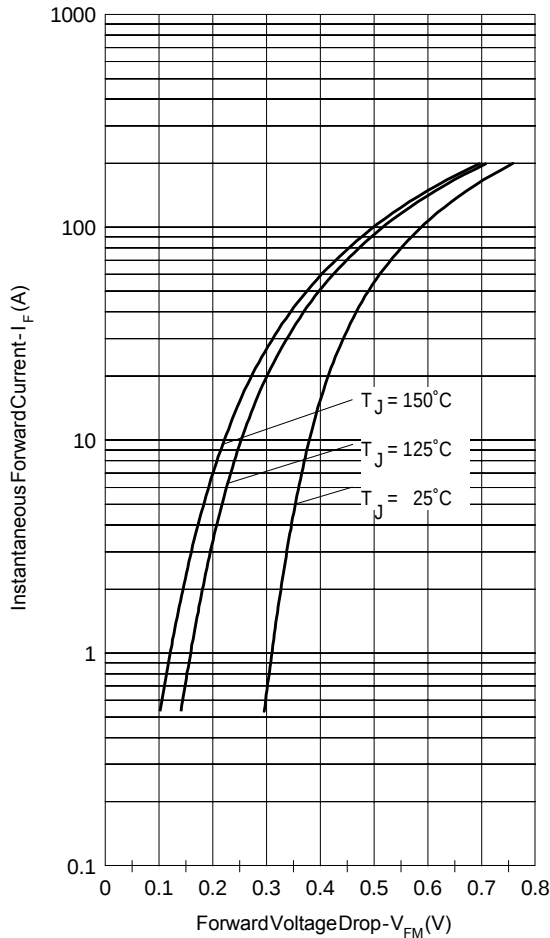


Fig. 1 - Max. Forward Voltage Drop Characteristics (PerLeg)

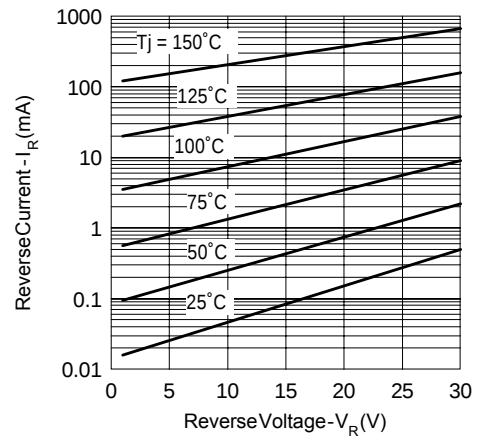


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (PerLeg)

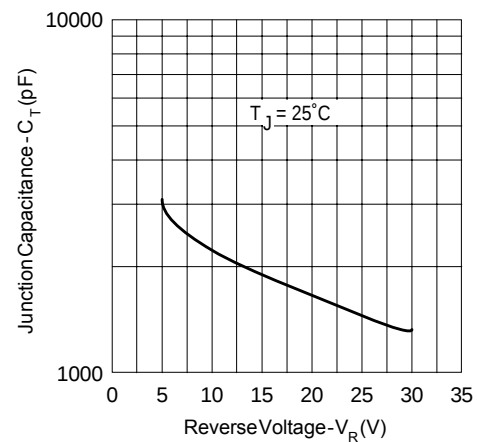


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (PerLeg)

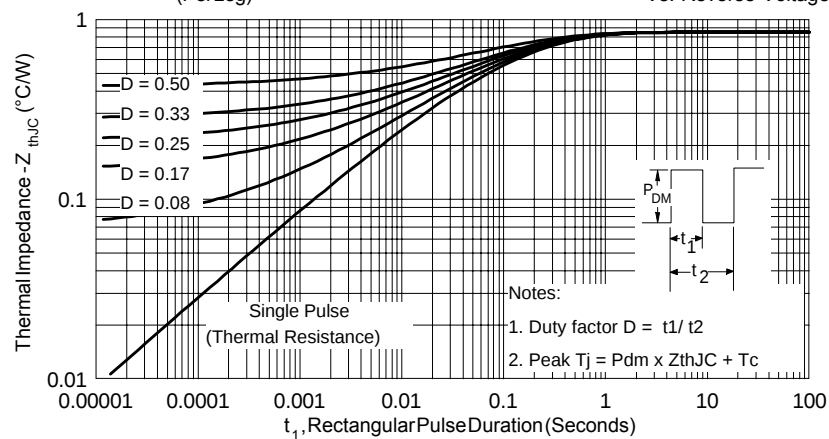


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (PerLeg)

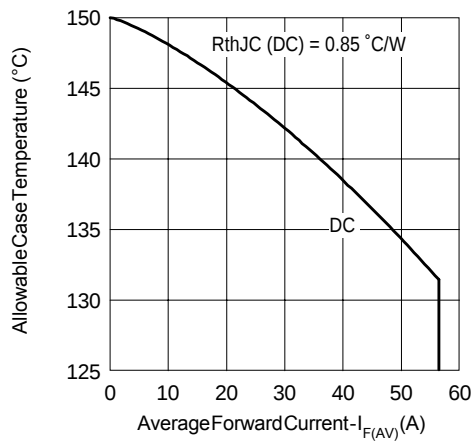


Fig. 5 - Max. Allowable Case Temperature
Vs. Average Forward Current (Per Leg)

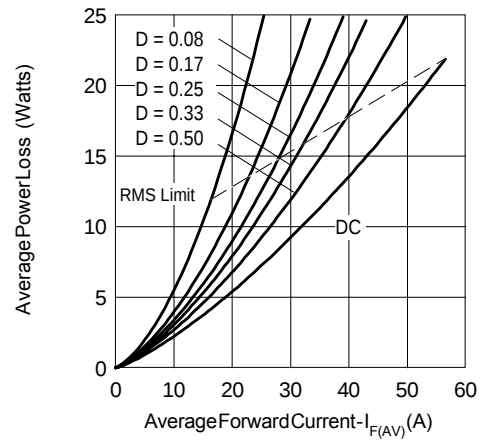


Fig. 6 - Forward Power Loss Characteristics
(Per Leg)

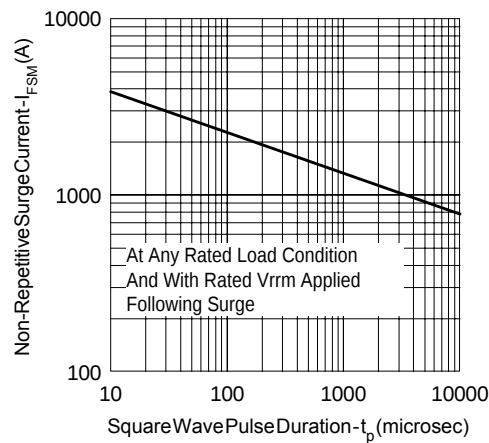


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)



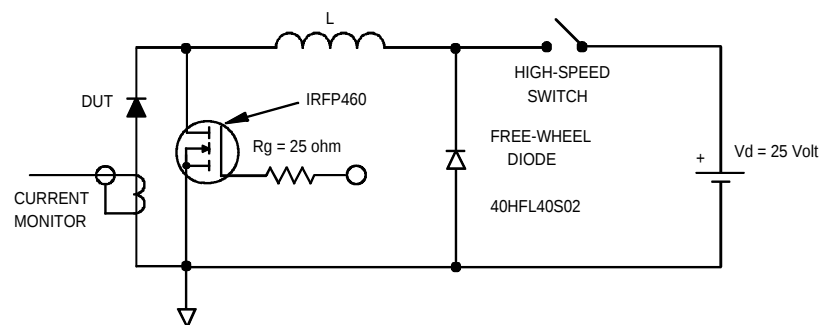


Fig. 8 - Unclamped Inductive Test Circuit

Outline Table

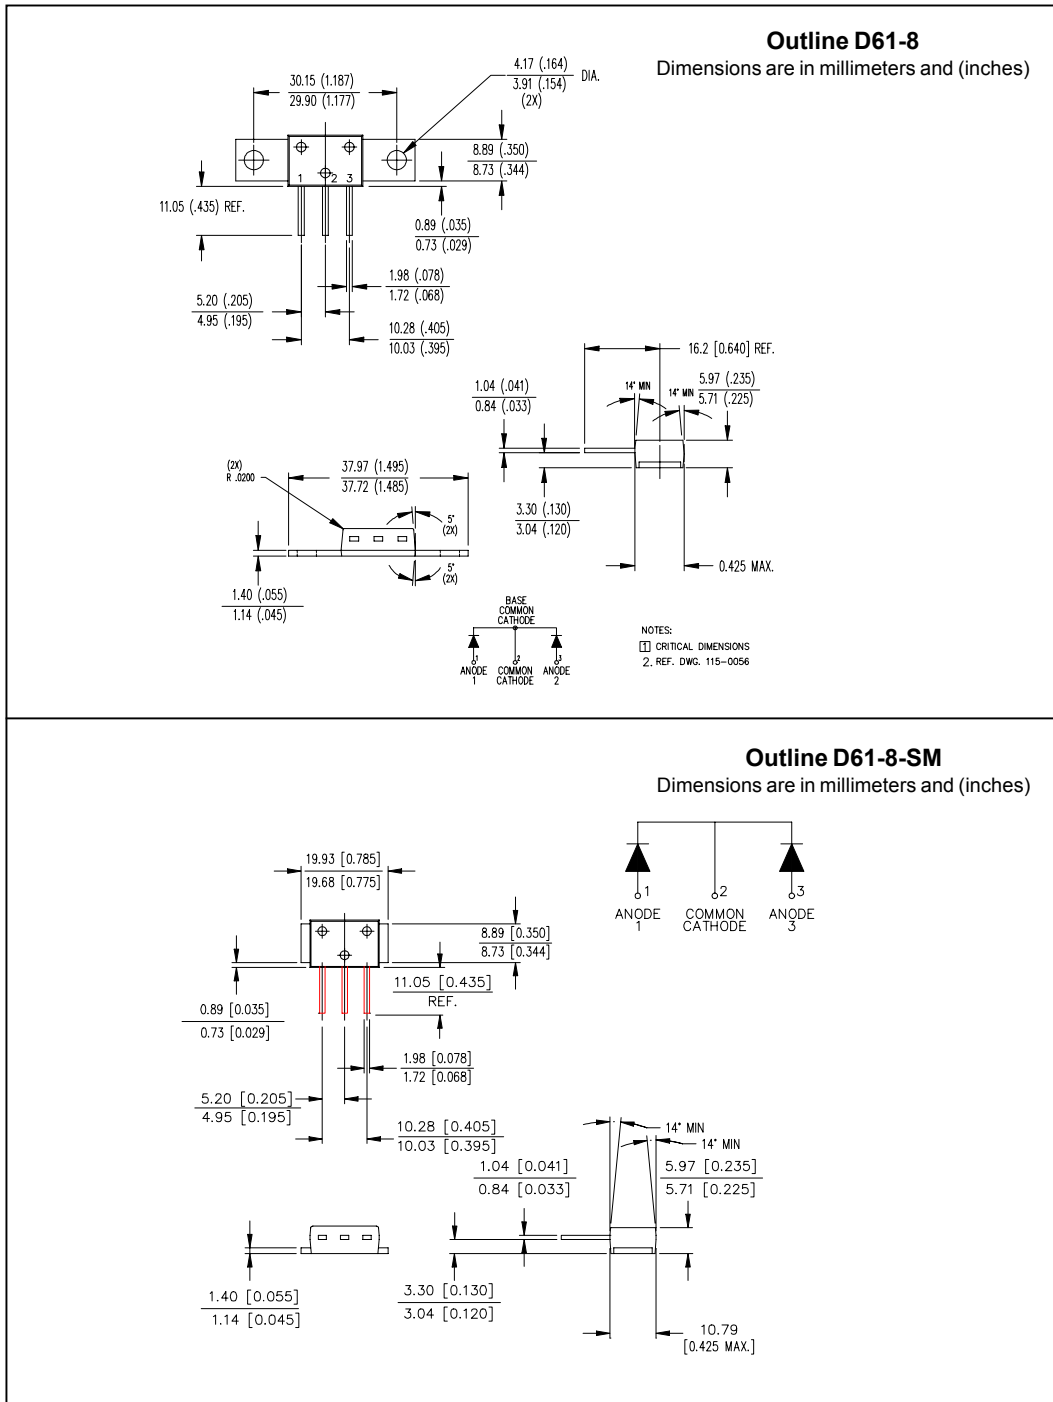

Outline Table

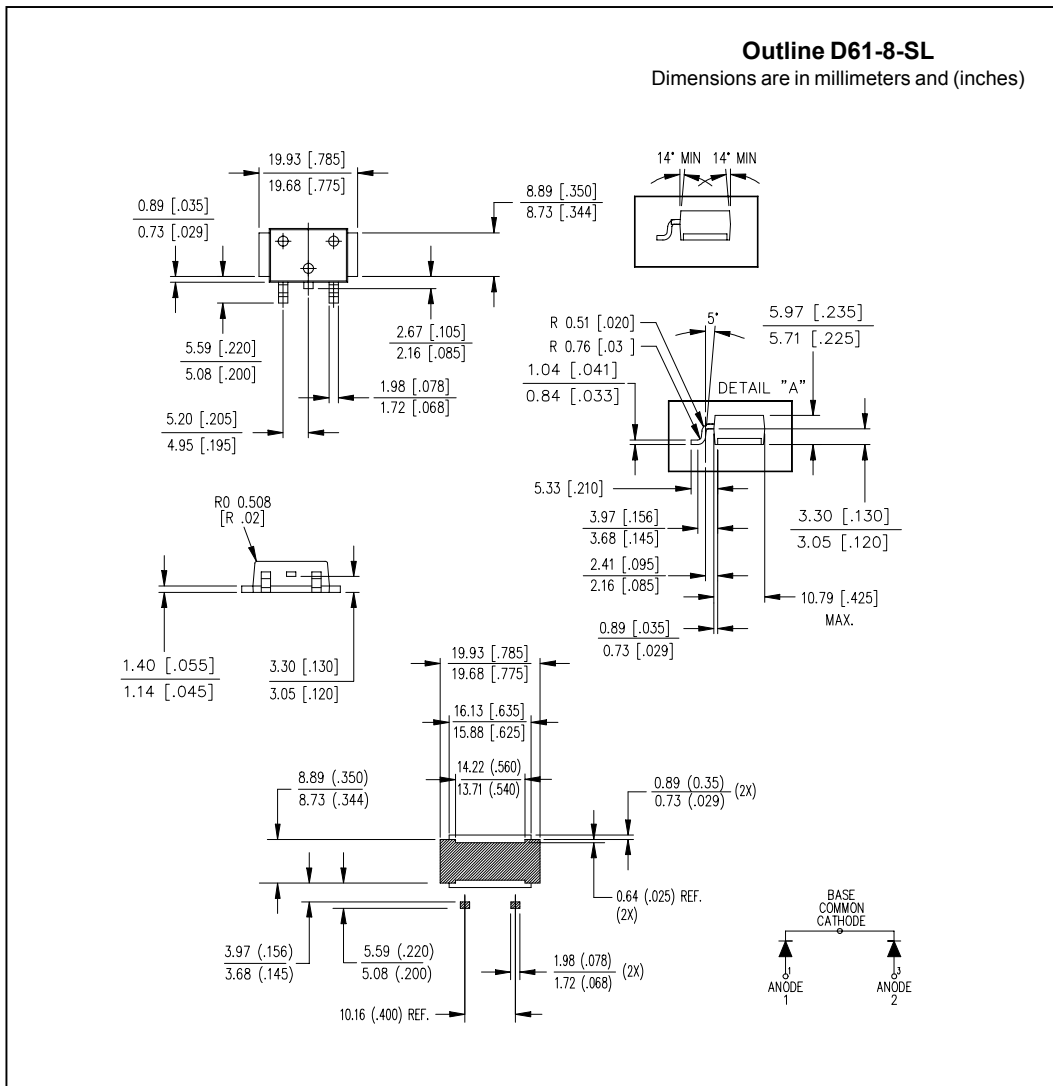

Part Marking Information

EXAMPLE: THIS IS A 82CNQ030A WITH LOT CODE 89 09 ASSEMBLED ON WW 45, 2000 IN THE ASSEMBLY LINE "A"	
D61-8	
EXAMPLE: THIS IS A 82CNQ030ASM WITH LOT CODE 89 09 ASSEMBLED ON WW 45, 2000 IN THE ASSEMBLY LINE "A"	
D61-8-SM	
EXAMPLE: THIS IS A 82CNQ030ASL WITH LOT CODE 89 09 ASSEMBLED ON WW 45, 2000 IN THE ASSEMBLY LINE "A"	
D61-8-SL	

82CNQ030A

Bulletin PD-20041 rev. B 09/01

International
IOR Rectifier

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7309

Visit us at www.irf.com for sales contact information. 09/01