

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- Power Amplifier Applications

MARKING



CLASSIFICATION OF $h_{FE(1)}$



Product-Rank	A1020-O	A1020-Y
Range	70~140	120~240

ORDER INFORMATION

Part Number	Type
A1020-□	Lead (Pb)-free
A1020-□-C	Lead (Pb)-free and Halogen-free

*□=Rank

TO-92

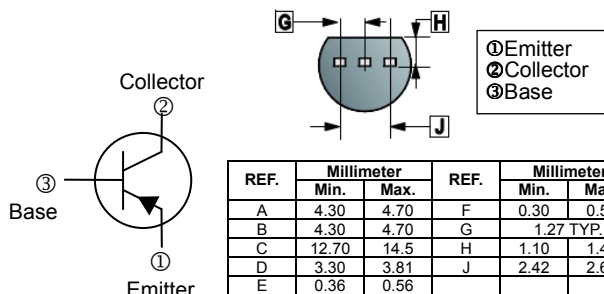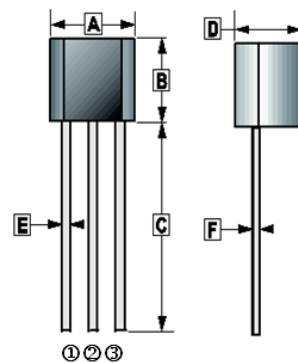

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	4.30	4.70	F	0.30	0.51
B	4.30	4.70	G	1.27 TYP.	
C	12.70	14.5	H	1.10	1.40
D	3.30	3.81	J	2.42	2.66
E	0.36	0.56			

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Collector-Base Voltage	V_{CBO}	-50	V
Collector-Emitter Voltage	V_{CEO}	-50	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current-Continuous	I_C	-2	A
Collector Power Dissipation	P_D	625	mW
Thermal Resistance from Junction-Ambient	$R_{\theta JA}$	200	$^\circ\text{C/W}$
Junction, Storage Temperature	T_J, T_{STG}	-55~150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-50	-	-	V	$I_C = -100\mu\text{A}, I_E = 0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-50	-	-	V	$I_C = -10\text{mA}, I_B = 0$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5	-	-	V	$I_E = -100\mu\text{A}, I_C = 0$
Collector Cut-off Current	I_{CBO}	-	-	-1	μA	$V_{CB} = -50\text{V}, I_E = 0$
Emitter Cut-off Current	I_{EBO}	-	-	-1	μA	$V_{EB} = -5\text{V}, I_C = 0$
DC Current Gain	$h_{FE(1)}$	70	-	240		$V_{CE} = -2\text{V}, I_C = -0.5\text{A}$
	$h_{FE(2)}$	40	-	-		$V_{CE} = -2\text{V}, I_C = -1.5\text{A}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	-	-	-0.5	V	$I_C = -1\text{A}, I_B = -50\text{mA}$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	-	-	-1.2	V	$I_C = -1\text{A}, I_B = -50\text{mA}$
Transition Frequency	f_T	-	100	-	MHz	$V_{CE} = -2\text{V}, I_C = -500\text{mA}$
Collector Output Capacitance	C_{ob}	-	40	-	pF	$V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$

CHARACTERISTIC CURVES

Static Characteristic

