




## DESCRIPTION

The A8169-025 Series is a fixed frequency, constant current step-up DC/DC converter ideal for driving LEDs used in backlighting applications on cellular phones, PDAs and digital cameras etc. Output voltage of up to 23V can be derived, and from a 3.2V input six white LED's can be driven in series or alternatively, using a 2.5V input, a network of two parallel legs with three in each may be driven.

Luminance of the LED's is controlled by changing the duty cycle of a PWM signal applied to the CE pin. In addition, an internal MOSFET with an  $R_{DS(ON)}$  of  $0.8\Omega$  is used. Allow profile and small board area solution can be achieved using a chip coil and an ultra small ceramic output capacitor (CL) of  $0.22\mu F$ .

The A8169-025 is available in SOT-26 Package.

## TYPICAL APPLICATION

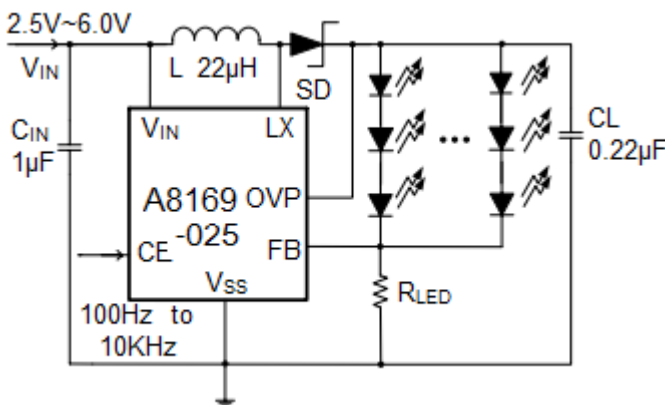

## FEATURES

- Input voltage range: 2.5V~6V
- Output voltage range: up to 23V externally set-up reference voltage 0.25V
- Oscillation frequency: 1.0MHz
- On resistance:  $0.8\Omega$
- Efficiency: 88%(When driving 3 white LEDs in series  $V_{IN}=3.6V$   $I_{LED}=20mA$ )
- Control: PWM control
- Stand-by Current:  $I_{STB}=1.0\mu A$
- Load capacitor:  $0.22\mu F$ , ceramic
- Lx limit Current:  $1.0A$
- Available in SOT-26 package

## APPLICATIONS


- For White LED Drivers
- Mobil phones, PHS
- PDAs , GPSs
- Digital still cameras

## ORDERING INFORMATION

Package Type	Part Number	
SOT-26	E6	A8169E6R-025
		A8169E6VR-025
Note	R: Tape & Reel V: Halogen free Package	
AiT provides all RoHS free products Suffix " V " means Halogen free Package		



## PIN DESCRIPTION



Top View

Pin #	Symbol	Function
1	LX	Switch
2	V <sub>SS</sub>	Ground
3	FB	Voltage Feedback
4	CE	Chip Enable
5	OVP	Over Voltage Protection
6	V <sub>IN</sub>	Power Supply



## ABSOLUTE MAXIMUM RATINGS

V <sub>IN</sub> Pin Voltage	V <sub>SS</sub> -0.3V ~ V <sub>SS</sub> +7V
OUT Pin Voltage	V <sub>SS</sub> -0.3V ~ V <sub>SS</sub> +28V
LX Pin Voltage	V <sub>SS</sub> -0.3V ~ V <sub>SS</sub> +28V
FB Pin Voltage	V <sub>SS</sub> -0.3V ~ V <sub>SS</sub> +7V
CE Pin Voltage	V <sub>SS</sub> -0.3V ~ V <sub>SS</sub> +7V
OVP Pin Voltage	V <sub>SS</sub> -0.3V ~ V <sub>SS</sub> +28V
LX Pin Current	1300mA
Power Dissipation	250mW
Operating Temperature Range	-40°C ~ + 85°C
Storage Temperature Range	-55°C ~ + 125°C
Lead Temperature (Soldering, 10s)	260°C

Stresses above may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



## ELECTRICAL CHARACTERISTICS

T<sub>A</sub>=25°C, unless otherwise noted


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Circuits
FB Control Voltage	V <sub>FB</sub>		0.235	0.25	0.265	V	1
Output Voltage Range	V <sub>OUT</sub>		V <sub>IN</sub>		23	V	
Lx Operating Voltage Range	V <sub>LX</sub>				23	V	
Operating Voltage Range	V <sub>IN</sub>		2.5		6	V	
Stand-by Current	I <sub>STB</sub>	V <sub>CE</sub> =0V, V <sub>LX</sub> =5V		1		uA	3
Supply Current 1	I <sub>DD1</sub>			550		uA	2
Supply Current 2	I <sub>DD2</sub>	V <sub>IN</sub> =V <sub>LX</sub> , V <sub>FB</sub> =0.4V		400		uA	3
Oscillation Frequency	F <sub>OSC</sub>		0.8	1.0	1.2	MHz	2
Maximum Duty Cycle	MAXDY	V <sub>CONT</sub> =0.4V	86	92	98	%	2
Efficiency	EFFI	V <sub>IN</sub> =3.6V; R <sub>LED</sub> =12.5Ω		88		%	1
Current Limit	I <sub>LIM</sub>	V <sub>IN</sub> =3.6		1.0		A	4
LX Overvoltage Limit	LXOVL		23	25	27	V	2
LX On Resistance		V <sub>IN</sub> =3.6V, V <sub>LX</sub> =0.4V		0.8		Ω	2
LX Leak Current	I <sub>LXL</sub>			0	1	uA	3
CE "H" Voltage	V <sub>CEH</sub>		1.4			V	2
CE "L" Voltage	V <sub>CEL</sub>				0.5	V	2
CE "H" Current	I <sub>CEH</sub>	V <sub>IN</sub> =V <sub>LX</sub> , V <sub>FB</sub> =0.4V		1		uA	3
CE "L" Current	I <sub>CEL</sub>	V <sub>IN</sub> =V <sub>LX</sub> , V <sub>FB</sub> =0.4V		1		uA	3
FB "H" Current	I <sub>FBH</sub>	V <sub>IN</sub> =V <sub>LX</sub> , V <sub>FB</sub> =0.4V			0.1	uA	3
FB "L" Current	I <sub>FBL</sub>	V <sub>IN</sub> =V <sub>LX</sub> , V <sub>FB</sub> =0.4V			-0.1	uA	3




## TYPICAL PERFORMANCE CHARACTERISTICS

1. CH1=CE, CH2=FB


100Hz, 4 series LED,  $I_{LED}=20mA$

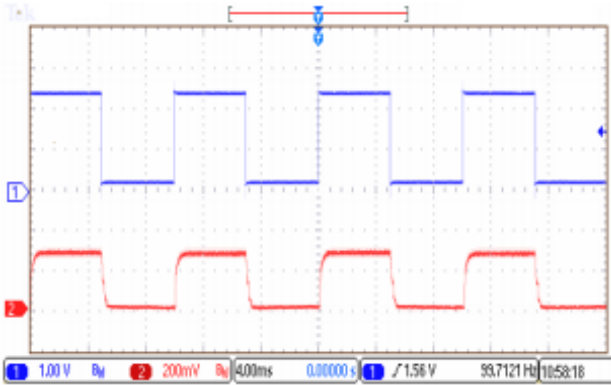


2. 100Hz, 6 series LED,  $I_{LED}=20mA$

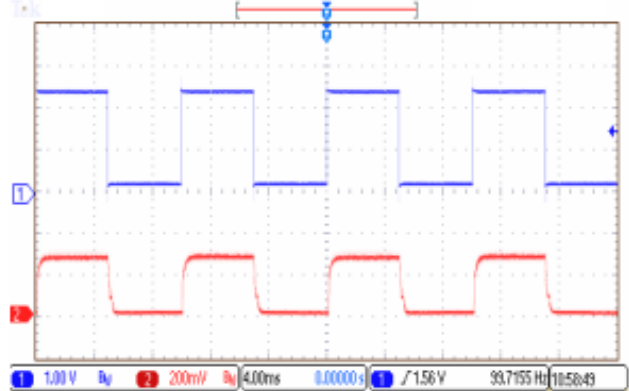

3. 10KHz, 4 series LED,  $I_{LED}=20mA$

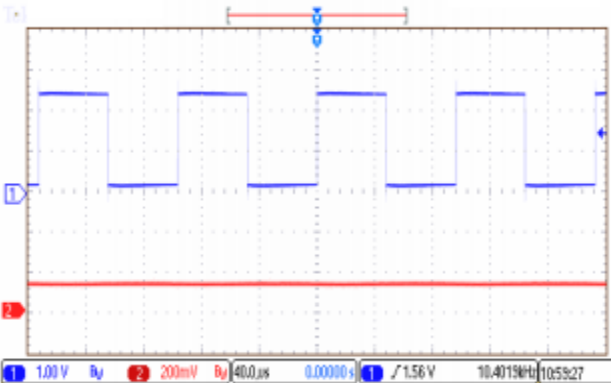


4. 10KHz, 6 series LED,  $I_{LED}=20mA$

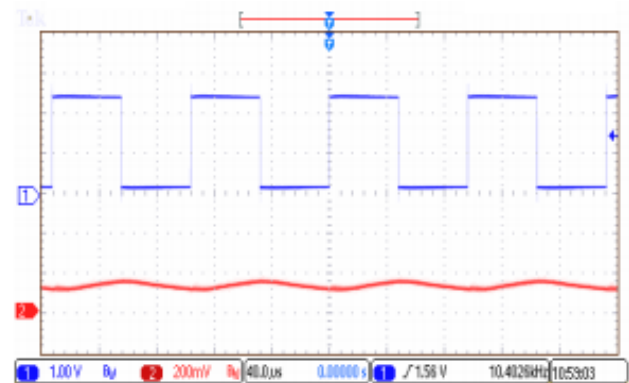




## TEST CIRCUIT


1. Circuit 1

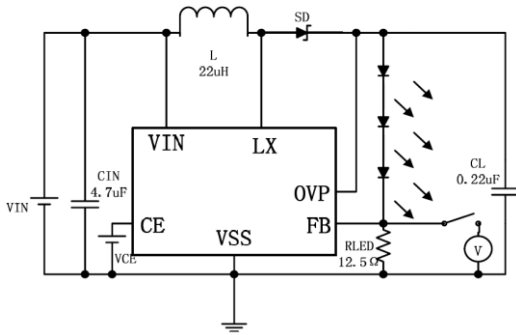


2. Circuit 2

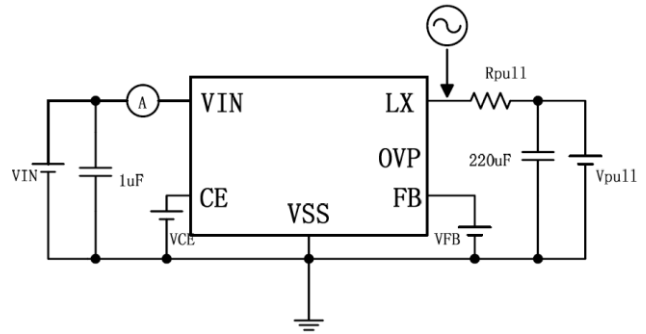

3. Circuit 3

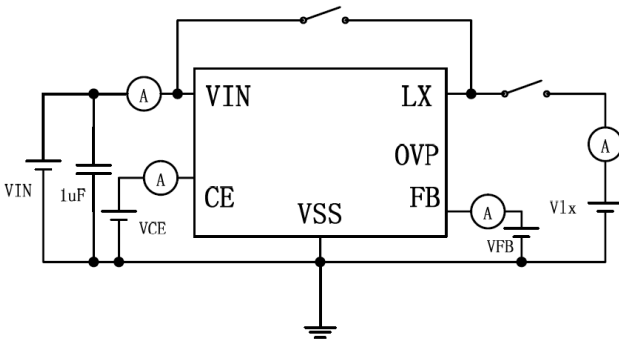


4. Circuit 4

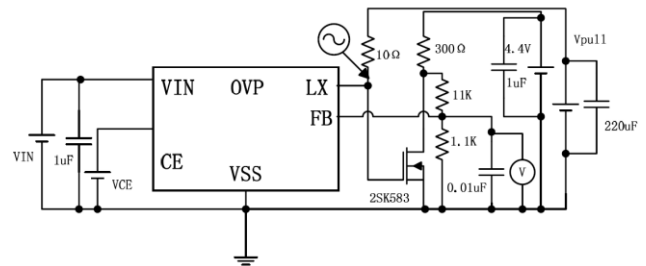




**BLOCK DIAGRAM**

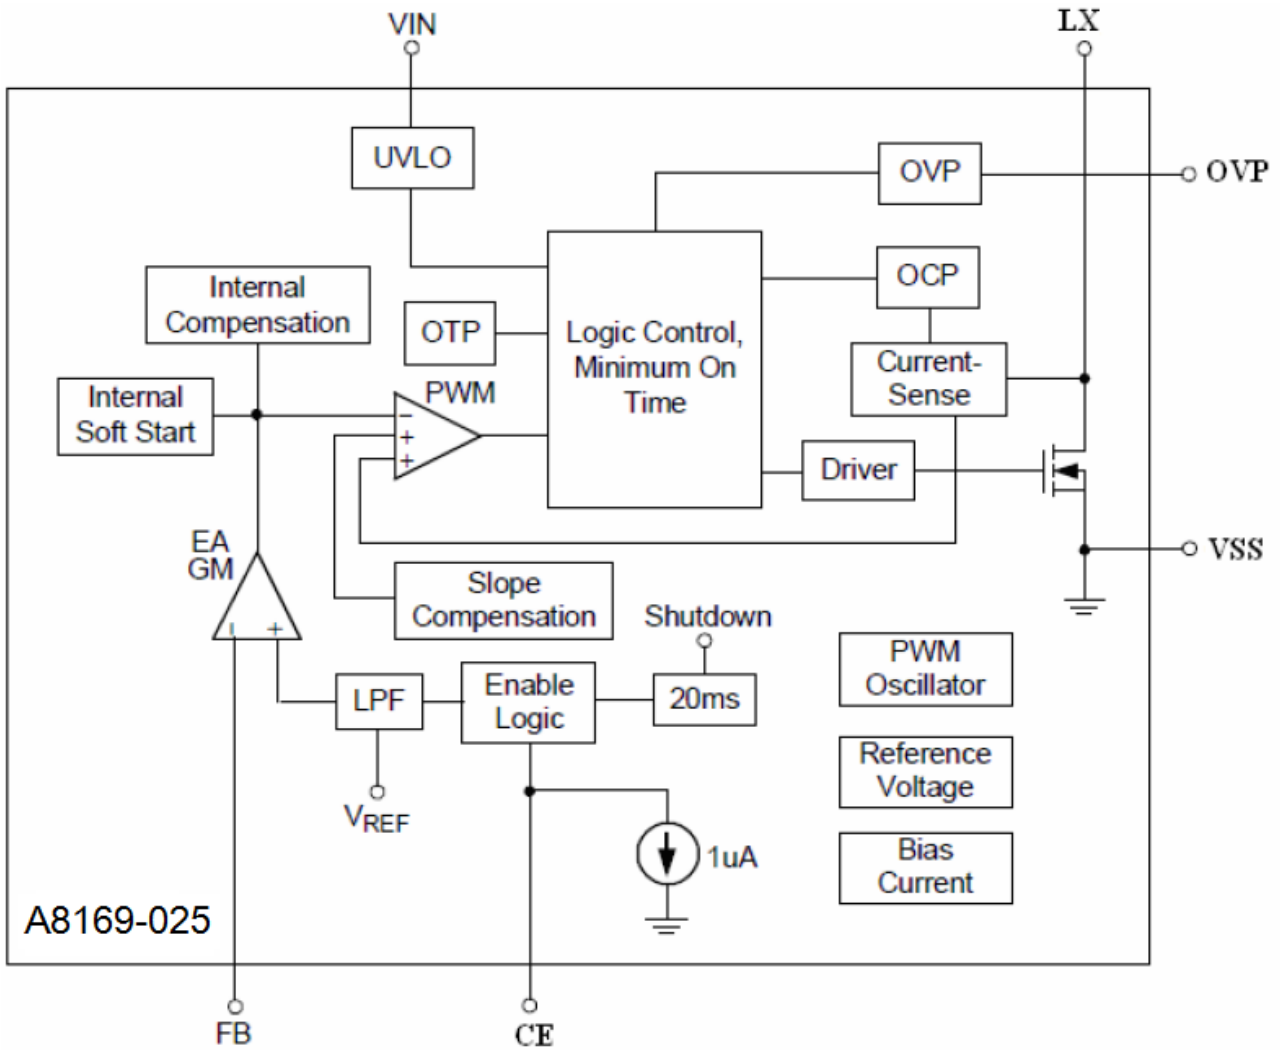



**PACKAGING INFORMATION**

Dimension in SOT-26 Package (Unit: mm)

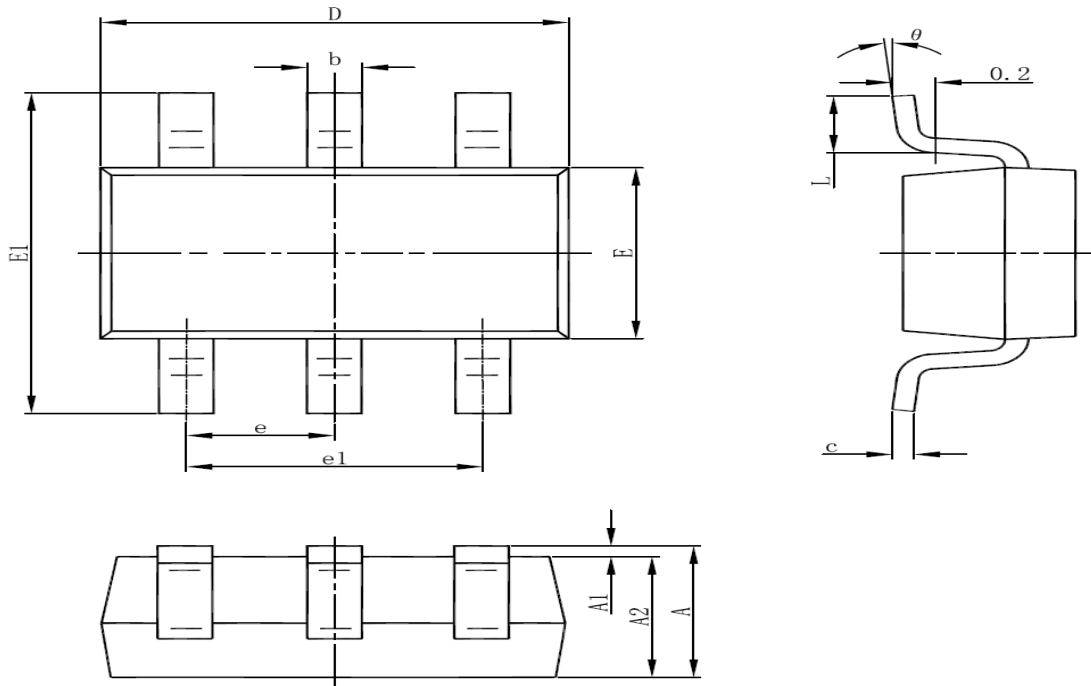

SYMBOL	MIN	MAX
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
c	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950(BSC)	
e1	1.800	2.000
L	0.300	0.600
θ	0°	8°





## IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.