
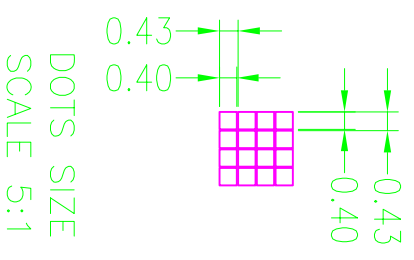
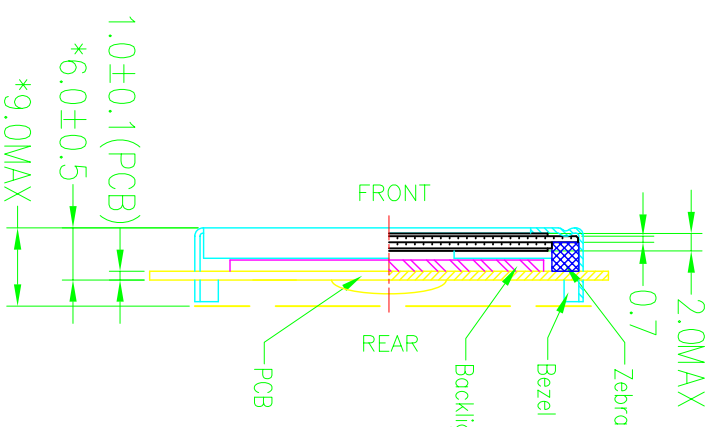


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	NOV-01-2007

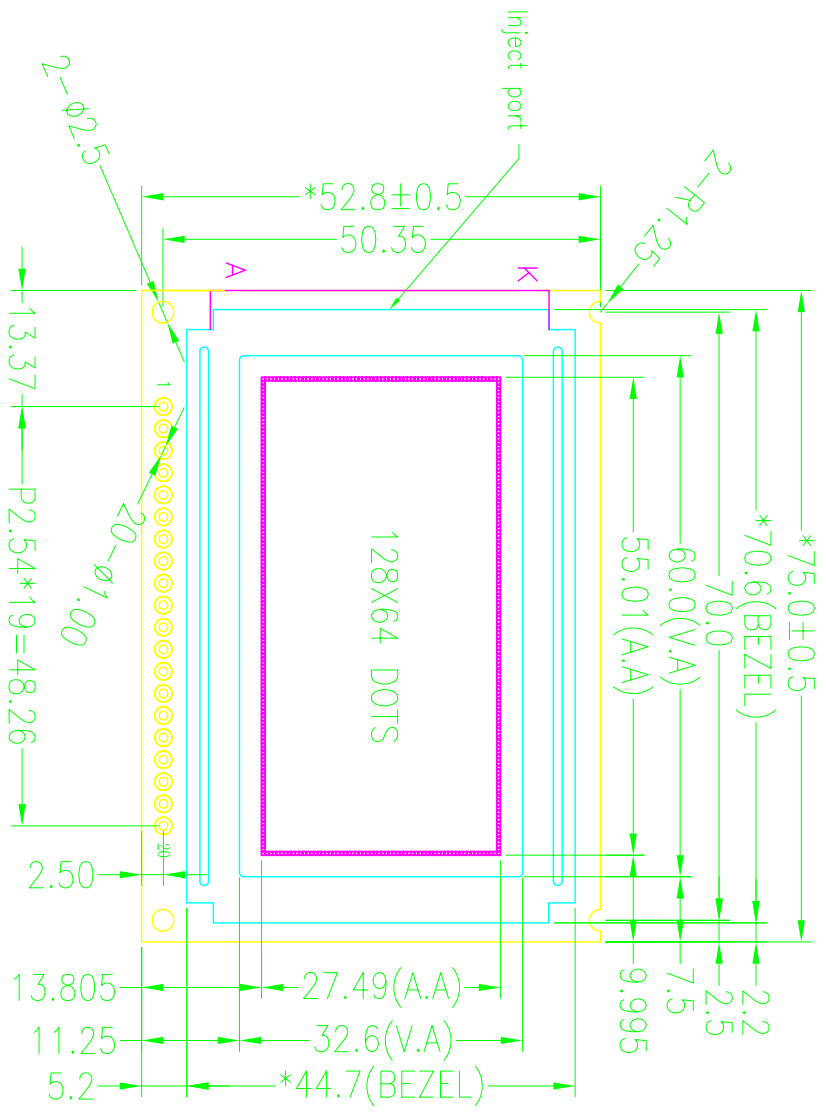

VIEWING DIRECTION

Specification:

- 1). Driving: Duty:1/64, Bias:1/9, VLCD:9.2V(Ref.), VDD:5.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode: STN/Negative/Transmissive
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). IC: SBNO064G
- 6). Backlight: EDGE White
- 7). Dimensions with mark "\*" are important with mark "(") are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VDD	VSS	VLCD	DB0	DB1	DB2	DB3	DB4	DB5	DB6
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB7	/CS1	/CS2	RST	R/W	RS	E	VEE	LEDA	LEDK

**深圳秋田微电子有限公司**  
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABG128064H10-BIW-R			ABG128064H10-BIW-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				UNIT 单位	mm
				DATE 日期	
				APP: 签字	
				CHK: 签字	
				DWN: 签字	