

# ABS1 THRU ABS10

## SURFACE MOUNT FAST SWITCHING RECTIFIER


REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 1.0 Ampere

### FEATURES

- ◆ Glass passivated chip junction.
- ◆ Ideal for surface mounted applications.
- ◆ Low leakage.
- ◆ High forward surge current capability.
- ◆ High temperature soldering guaranteed:  
260°C/10 seconds at terminals.

### Mechanical Data

- ◆ Case: Molded plastic body.
- ◆ Epoxy: UL94V-0 rate flame retardant.
- ◆ Polarity: Molded on body.
- ◆ Lead: Plated terminals solderable per MIL-STD-202E  
method 208C.
- ◆ Weight: 0.003 ounce, 0.1 gram.

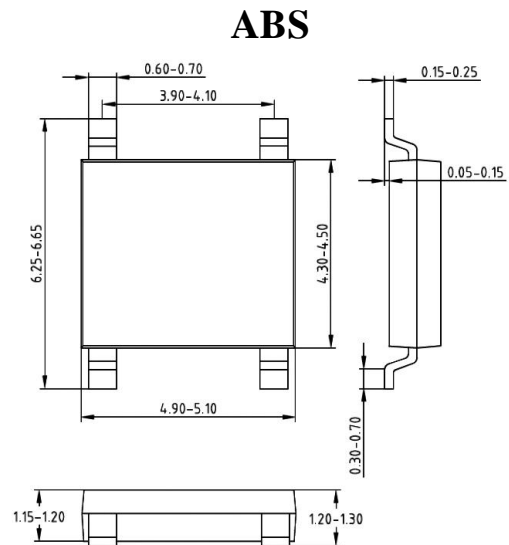

**Dimensions in inches and (millimeters)**

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

**Rating at 25°C ambient temperature unless otherwise specified.**

**Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%**

PARAMETER	SYMBOL	ABS1	ABS2	ABS3	ABS4	ABS6	ABS8	ABS10	UNIT
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current, 0.06" (1.5mm) lead length at $T_L=90^\circ\text{C}$ (Note 2)	$I_{(AV)}$	1.0							A
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30							A
Rating for Fusing ( $t < 8.3\text{ms}$ )	$I^2t$	10							$\text{A}^2\text{s}$
Maximum Instantaneous Forward Voltage drop Per Bridge element 1.0A	$V_F$	1.1							V
Maximum DC Reverse Current at $T_A=25^\circ\text{C}$ at Rated DC Blocking voltage $T_A=125^\circ\text{C}$	$I_R$	5							$\mu\text{A}$
		0.5							mA
Typical Junction Capacitance (Note 1)	$C_J$	25							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JC}$	40							$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$

**Note:** 1. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.

2. Unit mounted on P.C.B. with 5.72mm×7.22mm copper pads.

# ABS1 THRU ABS10

## SURFACE MOUNT FAST SWITCHING RECTIFIER

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 1.0 Ampere

### RATING AND CHARACTERISTIC CURVES ABS1 THRU ABS10

FIG.1-FORWARD CURRENT DERATING CURVE

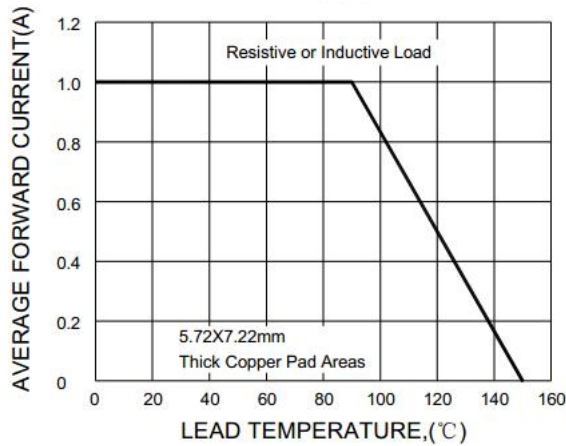


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

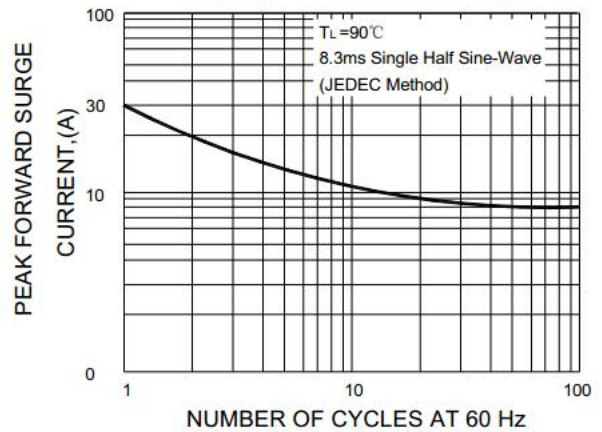


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

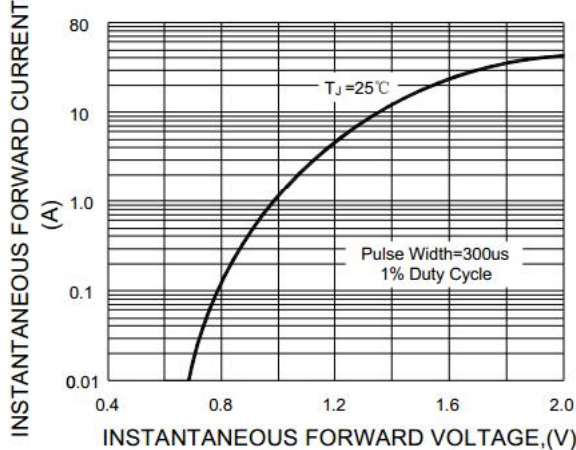


FIG.4-TYPICAL REVERSE CHARACTERISTICS

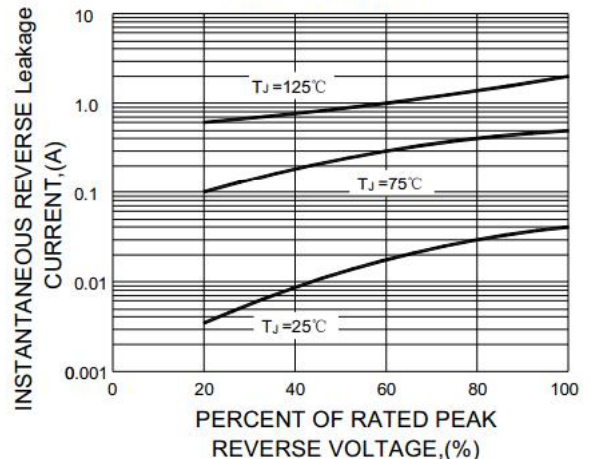


FIG.5-TYPICAL JUNCTION CAPACITANCE


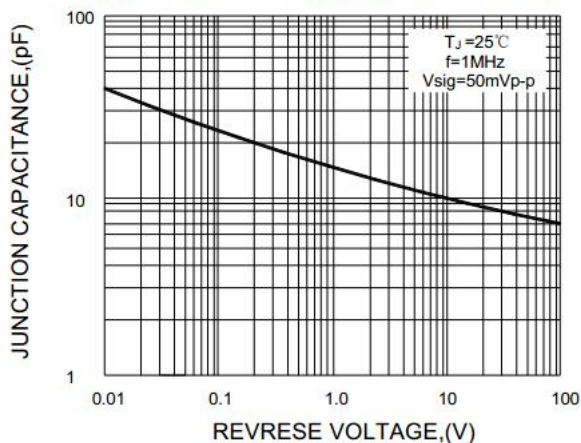


FIG.6-TRANSIENT THERMAL IMPEDANCE

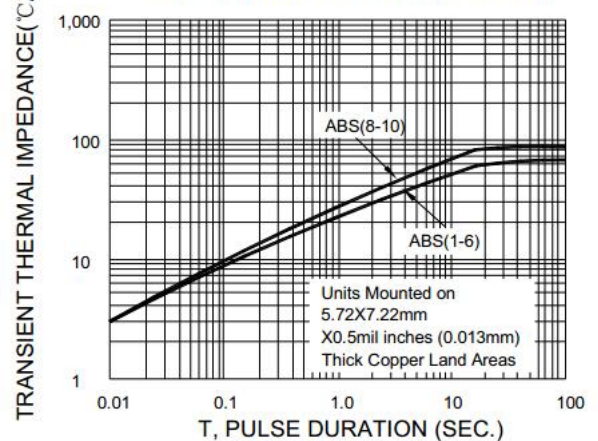

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.