


VOLTAGE RANGE: 200 - 1000V

CURRENT: 1.0A



ABS

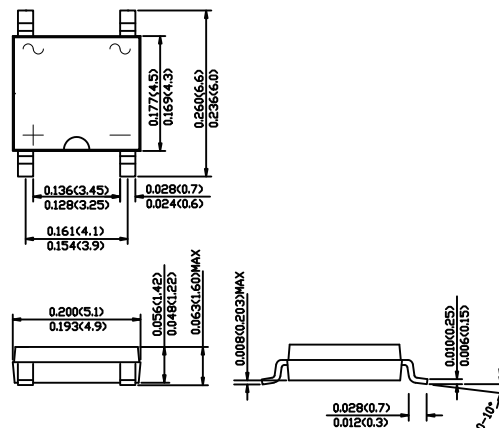

Dimensions in inches and (millimeters)

Features

- Glass passivated junction
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- High temperature soldering guaranteed:
260 °C / 10 seconds / 0.375" (9.5mm)
lead length at 5 lbs., (2.3 kg) tension
- Small size, simple installation
- Pure tin plated terminal , Lead free.
- High surge current capability

Mechanical Data

- Case : Molded plastic body
- Terminals : Plated leads solderable per MIL-STD-750, Method 2026
- Polarity : Polarity symbols marked on case
- Mounting Position : Any




Maximum Ratings and Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.


Characteristic	Symbol	ABS2	ABS4	ABS6	ABS8	ABS10	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	200	400	600	800	1000	V
Maximum average forward rectified current On glass-epoxy P.C.B.(Note1) On aluminum substrate(Note2)	I _{F(AV)}	0.8 1.0					A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30					A
Maximum instantaneous forward voltage drop per leg at 0.4A	V _F	0.95					V
Maximum DC reverse current T _A =25℃ at rated DC blocking voltage T _A =100℃	I _R	5 100					uA uA
Typical thermal resistance(NOTE 3)	RθJL	25					℃/W
	RθJA	80					
Operating temperature range	T _J	-55 to +150					℃
storage temperature range	T _{STG}	-55 to +150					℃

NOTES:1.On glass epoxy P.C.B. mounted on 0.05x0.05"(1.3x1.3mm) pads
 2.On aluminum substrate P.C.B. with on area of 0.8"x0.8"(20x20mm) mounted on 0.05X0.05"(1.3X1.3mm) solder pad
 3.Thermal resistance form junction to ambient and junction to lead mounted on P.C.B. with 0.2X0.2"(5X5mm) copper pads.


Forward Current Derating Curve

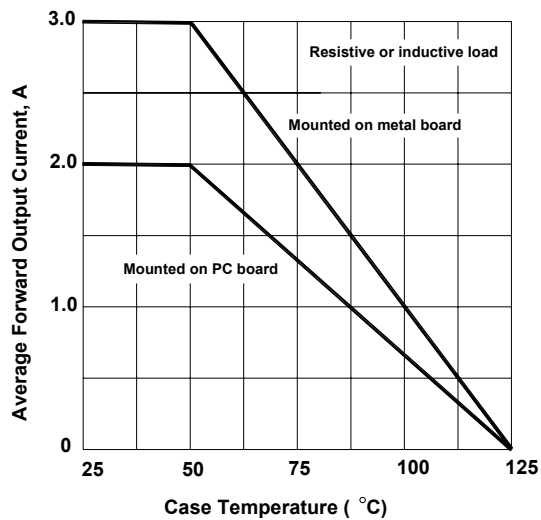

Typical Forward Characteristics, per element

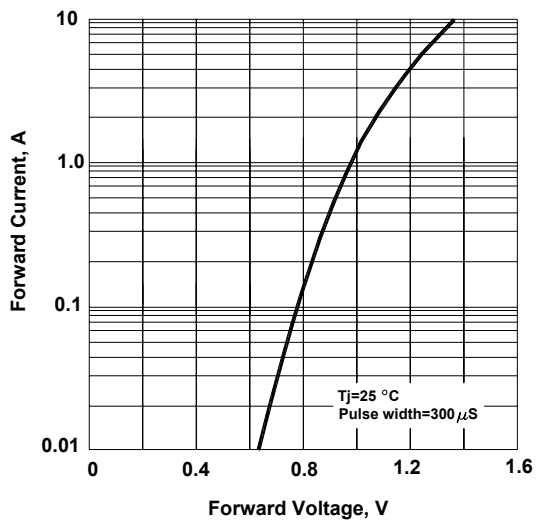

Max Non-repetitive Peak Forward Surge Current

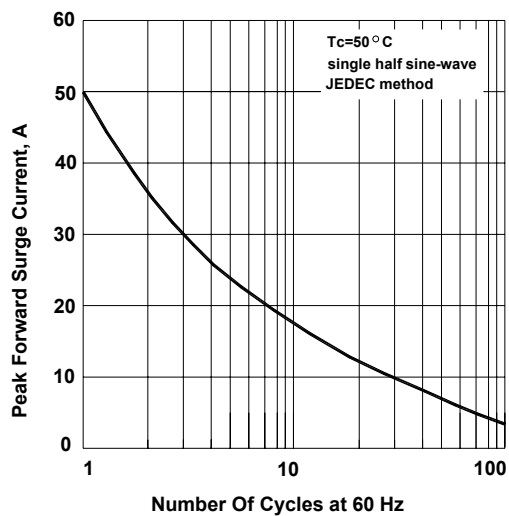

Typical Reverse Characteristics, per element

