

**GLASS PASSIVATED  
SURFACE MOUNT BRIDGE RECTIFIER**

**REVERSE VOLTAGE – 1000 Volts  
FORWARD CURRENT – 2 Ampere**


**FEATURES**

- Glass Passivated Chip Junction
- Reverse Voltage – 1000 V
- Forward Current – 2A
- High Surge Current Capability
- Designed for Surface Mount Application
- UL recognized file#E364304

**MECHANICAL DATA**

- Case Material: ABS
- Case Material: Green molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl.)
- Terminals: Solderable per MIL-STD-750, Method 2026
- Weight: 88 mg ( Approximate)

**ABS**

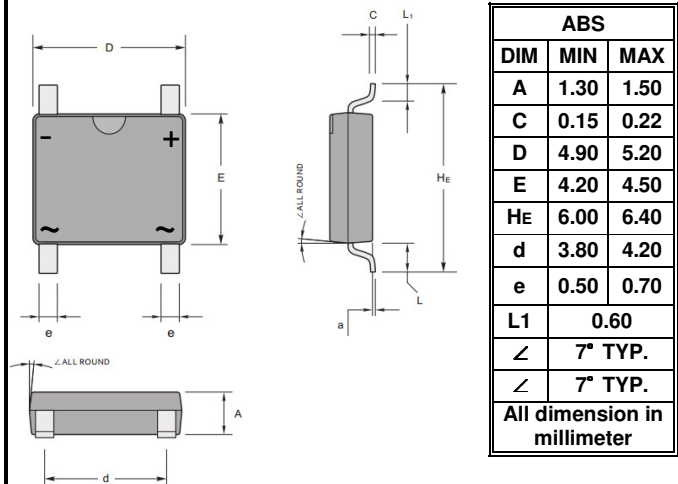

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

**ABSOLUTE RATINGS**

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	1000	V
Maximum DC blocking voltage	$V_{DC}$	1000	V
Average rectified output current per device @ $T_C=115^\circ\text{C}$	$I_{(AV)}$	2	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load @ $T_A=25^\circ\text{C}$	$I_{FSM}$	60	A
$I^2 t$ rating for fusing ( $t = 8.3\text{ms}$ )	$I^2 t$	14.9	$\text{A}^2\text{S}$
Operating and storage temperature range	$T_J, T_{STG}$	-55 to +150	$^\circ\text{C}$

**STATIC ELECTRICAL CHARACTERISTICS**

PARAMETER	TEST CONDITION	SYMBOL	MAX.	UNIT
Forward voltage (Note1)	$I_F = 1\text{A}$	$V_F$	0.95	V
	$I_F = 2\text{A}$		1.1	
Leakage current	$V_R = 1000\text{V}$	$I_R$	5	$\mu\text{A}$
			$T_A = 125^\circ\text{C}$ (Note1)	
Typical junction capacitance (Note 2)		$C_J$	25	$\text{pF}$

**THERMAL CHARACTERISTICS**

PARAMETER	SYMBOL	TYP.	UNIT
Typical thermal resistance (Note 3)	$R_{thJA}$	60	$^\circ\text{C/W}$
	$R_{thJC}$	16	

**Note :**

- (1) Perform static test after the temperature of oven is steady 20 minutes.
- (2) Measured at 1.0MHz and applied reverse voltage of 4.0V DC
- (3) Thermal resistance junction to case, lead and ambient in accordance with JESD-51.  
Unit Mounted on glass epoxy PC board with 4x1.5"x1.5" ( 3.81x3.81 cm ) copper pad.

REV.1, Dec.-2017,KBDA48

# RATING AND CHARACTERISTIC CURVES ABS210



FIG.1- FORWARD CURRENT DERATING CURVE

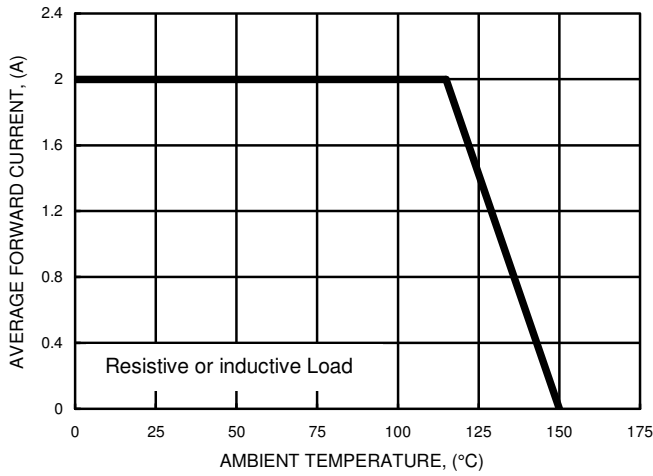


FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

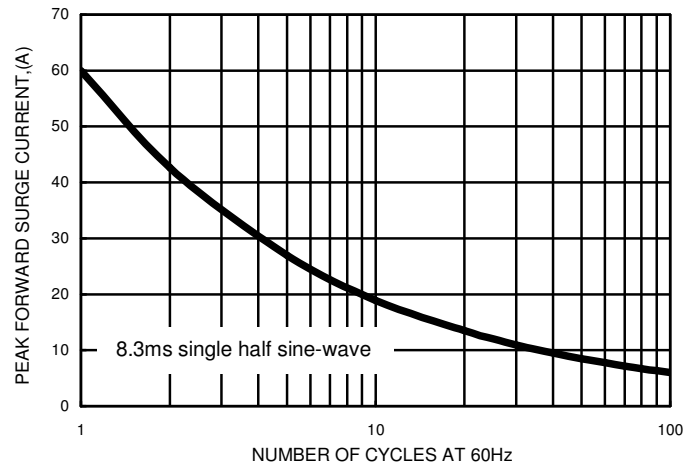


FIG.3- TYPICAL FORWARD CHARACTERISTICS

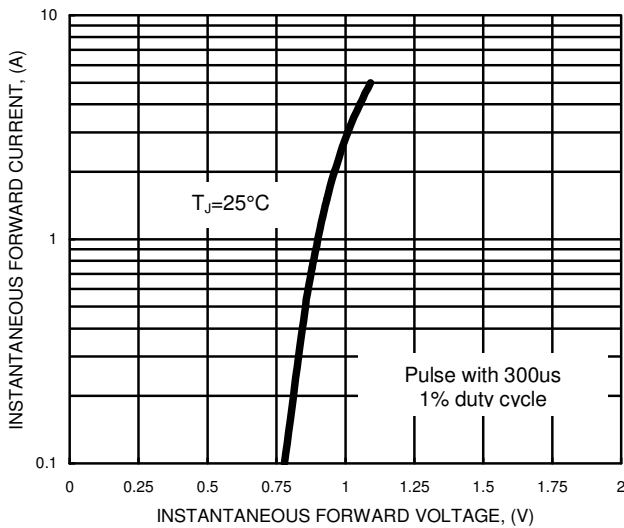


FIG.4- TYPICAL JUNCTION CAPACITANCE


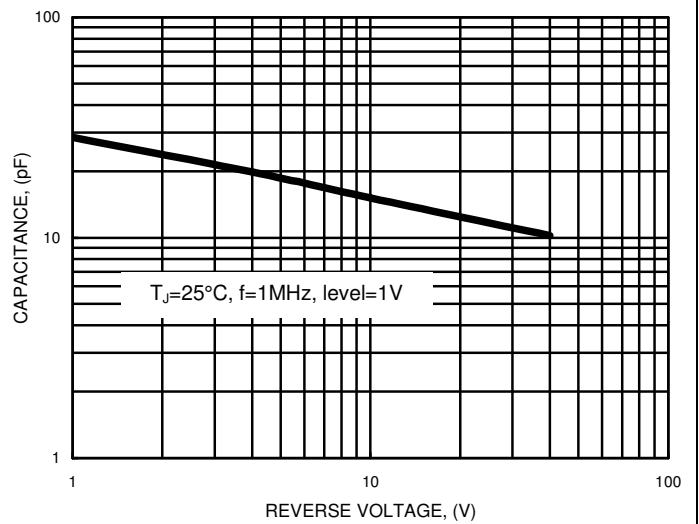


FIG.5- TYPICAL REVERSE CHARACTERISTICS

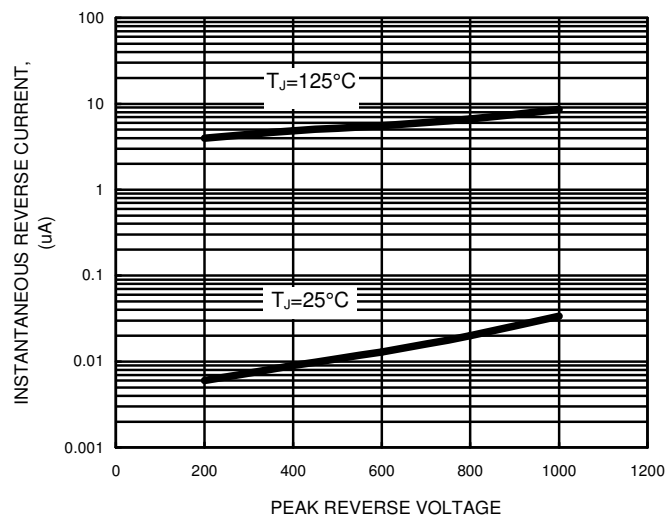

## **Important Notice and Disclaimer**

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.