


**SINGLE PHASE 2.0AMP SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER**

**Features**

- Glass passivated die construction
- Low forward voltage drop
- High current capability
- High surge current capability
- Designed for surface mount application
- Plastic material-UL flammability 94V-0

**Mechanical Data**

- Case: SOPA-4, molded plastic ABS
- Terminals: plated leads solderable per MIL-STD-202, Method 208
- Polarity: as marked on case
- Mounting position: Any
- Marking: type number

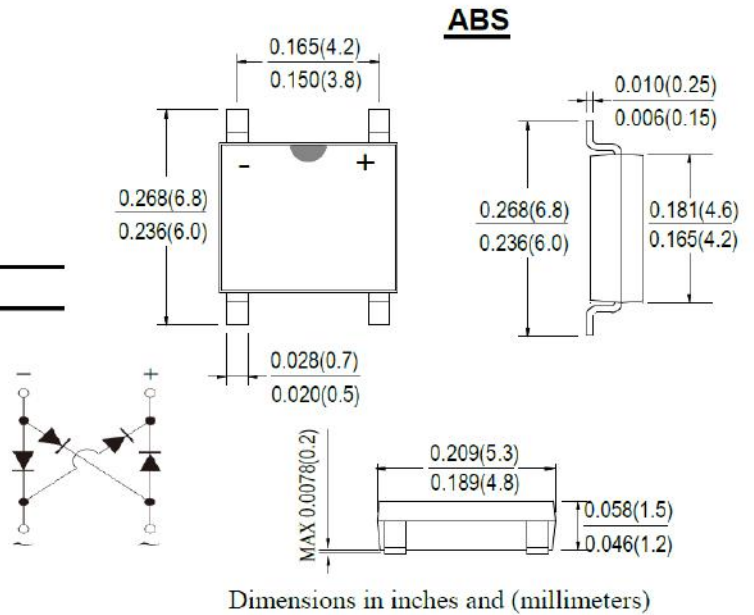

**Maximum Ratings and Electrical Characteristics**

Rating at 25°C ambient temperature unless otherwise specified.  
 Single Phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	ABS22	ABS24	ABS26	ABS28	ABS210	UNITS	
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>							
Working Peak Reverse Voltage	V <sub>RWM</sub>	200	400	600	800	1000	V	
DC Blocking Voltage	V <sub>DC</sub>							
RMS Reverse Voltage	V <sub>RMS</sub>	140	280	420	560	700	V	
Average Rectified Output Current @T <sub>c</sub> =100 °C	I <sub>F(AV)</sub>	2.0						A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	60						A
Rating for fusing (t<8.3ms)	I <sup>2</sup> t	14.94						A <sup>2</sup> s
Forward Voltage per element @I <sub>F</sub> =1.0A @I <sub>F</sub> =2.0A	V <sub>FM</sub>	0.95 1.0						V
Peak Reverse Current @T <sub>A</sub> =25°C At Rated DC Blocking Voltage @T <sub>A</sub> =125 °C	I <sub>R</sub>	5.0 200						uA
Typical Thermal Resistance per leg	R <sub>θJA</sub>	62.5						°C/W
	R <sub>θJL</sub>	25						
Operating and Storage Temperature Range	T <sub>J</sub> ,T <sub>STG</sub>	-55to+150						°C

FIG.1 FORWARD CURRENT DERATING CURVE

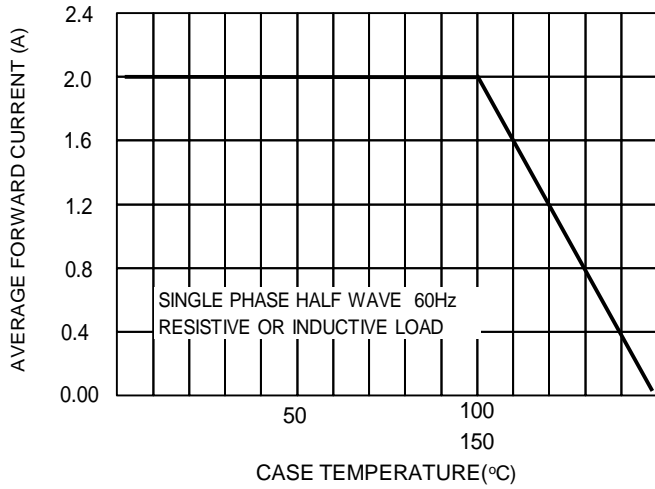


FIG.2 TYPICAL FORWARD CHARACTERISTICS

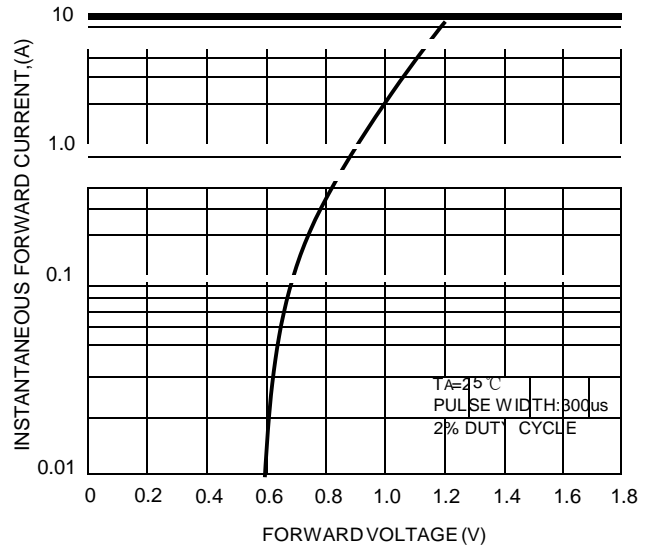


FIG.3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


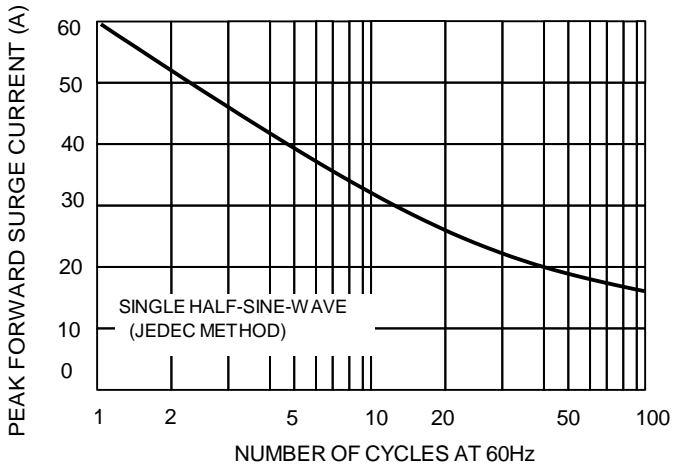


FIG. 4 TYPICAL REVERSE CHARACTERISTICS



ABS PAD LAYOUT

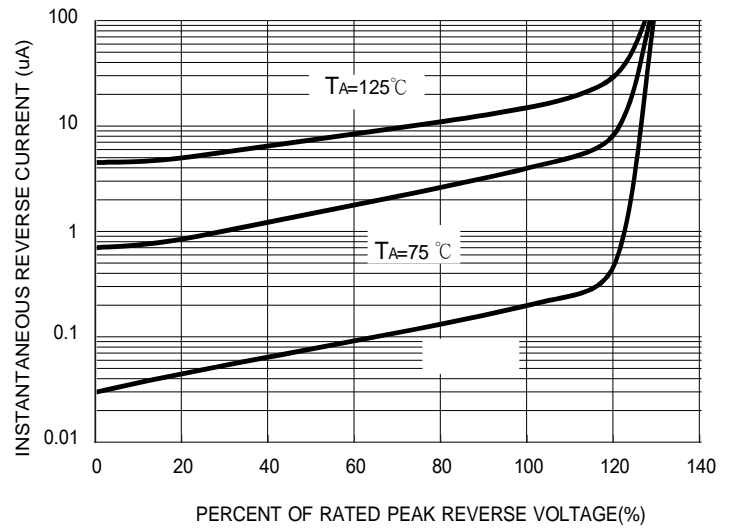