


# ACT9200SSC

Compatible with Eu Directive  
2002/EC - RoHS

The ACT9200SSC is housed in a miniature, low profile SMD package, with a ceramic base utilising a seam welded metal lid for high reliability and better long-term stability. Spread Spectrum Technology is employed to assist with EMI emission reductions. A Low Jitter version is available as the 9200SSCL. Taped and reeled packaging (1K reels) and loose quantities are available, to suit high and low volume production. Other Spread Spectrum devices are available in 5x3.2 (ACT9300SSC), DIL14 and 9.6x11.4x2.5. A 0.5% total percentage device is available to special order (MOQ 2K).



## SPECIFICATION

www.DataSheet4U.com

| Parameter                                                                                  | Symbol            | Specification                                                                      | Condition                                                       |
|--------------------------------------------------------------------------------------------|-------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| Supply Voltage                                                                             | V <sub>DD</sub>   | 3.3V <sub>DC</sub> ± 5%                                                            |                                                                 |
| Frequency Range                                                                            | f <sub>o</sub>    | 3.500 ~ 160.0 MHz                                                                  | Please specify                                                  |
| Frequency Stability                                                                        | Δf/f <sub>o</sub> | ±25ppm, ±50ppm or ±100ppm                                                          | Please specify                                                  |
| Temp Operating Range                                                                       | T <sub>opr</sub>  | 0 ~ +70°C or -40 ~ +85°C                                                           | Please specify                                                  |
| Temp Storage Range                                                                         | T <sub>stg</sub>  | -65 to +150°C                                                                      | Freq Dependant                                                  |
| Operating Current                                                                          | I <sub>op</sub>   | 7mA (10MHz) 8mA (32.768MHz)<br>17mA (75MHz) 18mA (125MHz)                          |                                                                 |
| Spread Percentage Down spread<br>or Centre spread need to be<br>Specified when ordering.** | Total %           | Down Spread %                                                                      | Centre Spread % ©                                               |
|                                                                                            | 0.5#              | -0.5#                                                                              | ±0.25#                                                          |
|                                                                                            | 1.0               | 1                                                                                  | ±0.5                                                            |
| Tolerance ±2% of Total%                                                                    | 3.0               | -3%                                                                                | ±1.5                                                            |
| EMI Reduction                                                                              |                   | -7dBc 100MHz at C=0.25#<br>-9dBc min 100MHz at C=0.5<br>-15dBc min 100MHz at C=1.5 | dBc: with respect to EMI level with no modulation. See examples |
| Modulation Carrier Frequency                                                               |                   | 6.9KHz min, 55.5KHz max                                                            | Dependant on frequency                                          |
| Duty Cycle                                                                                 | T <sub>w</sub> /t | 45/55%                                                                             | C <sub>L</sub> =15pF: @50%V <sub>DD</sub>                       |
| Output Level '0'                                                                           | V <sub>OL</sub>   | 0.8V max 0.2 V typical (at 10% V <sub>DD</sub> )                                   |                                                                 |
| Output Level '1'                                                                           | V <sub>OH</sub>   | 2.0V min 3.2V typical (at 90% V <sub>DD</sub> )                                    |                                                                 |
| Output Impedance                                                                           |                   | 40 ohms typical                                                                    |                                                                 |
| Rise & Fall Time (max)                                                                     | T <sub>rTf</sub>  | 4.0nS max (10%V <sub>DD</sub> to 90%V <sub>DD</sub> )                              |                                                                 |
| Output Load                                                                                | N/CL              | 15pF CMOS                                                                          |                                                                 |
| Start-up Time                                                                              | T <sub>osc</sub>  | 5mS max, 2mS Typical                                                               |                                                                 |
| Tri-state#                                                                                 |                   | Tri state: output when low. Disable time 100nS max                                 | 100K int'l pull up resistor                                     |
| Static discharge Voltage                                                                   |                   | >2000V                                                                             | MIL STD 883 Method 3015                                         |
| Ageing                                                                                     | F <sub>a</sub>    | ±5ppm                                                                              | first year max @25°C                                            |
| Cycle to Cycle Jitter                                                                      | T <sub>j</sub>    | ±250pS typical, ±300pS max                                                         | for 13 MHz Oscillator                                           |

### Notes:

- \*\*For initial design samples centre spread 1.5% is recommended.
- # Tri state not available on 0.5% total spread versions.

Please note that all parameters can not necessarily be specified in the same device


Customer to Specify : Frequency, Frequency Stability, Operating Temperature Range, Centre or down Spread, Spread Percentage  
 In line with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.

ISO9001: 2000 Registered

For quotations or further information please contact us at:  
 3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK  
<http://www.actcrystals.com>

Issue:5 M6  
 Date:01/02/06


## ACT9200SSC

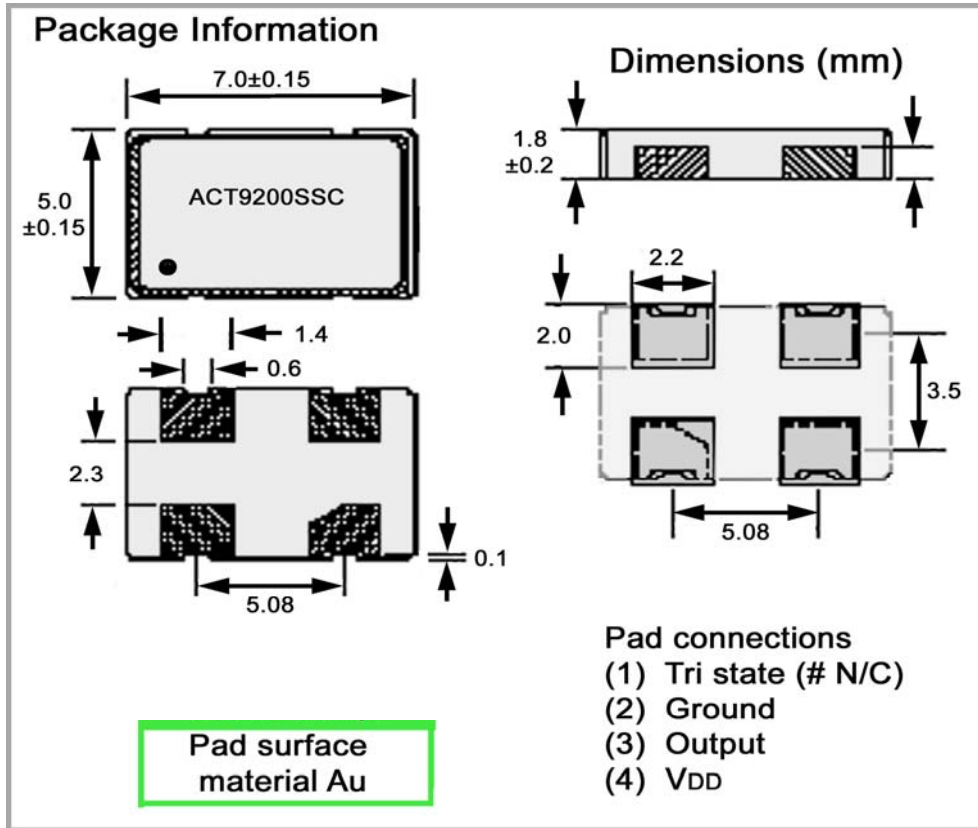

### Spread Spectrum principle:

**Down Spread**

**Centre Spread**

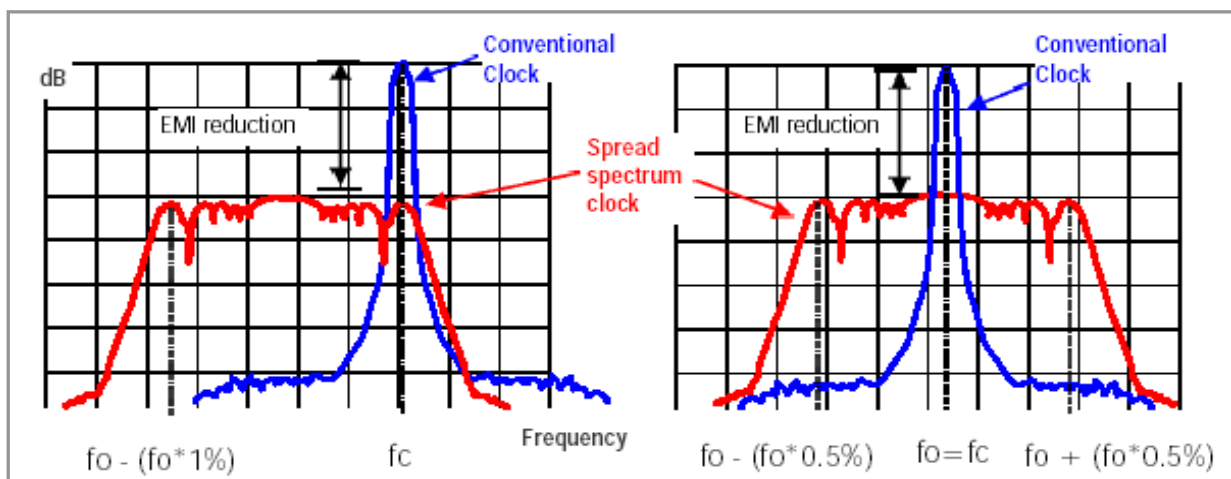

In line with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.

ISO9001: 2000 Registered

For quotations or further information please contact us at:

3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK

<http://www.actcrystals.com>

## ACT9200SSC

### Spread Spectrum principle (continued from page 2)

**Spread Spectrum Clock (SSC)**, the mode energy of a spread spectrum clock is spread over a wider bandwidth, resulting from the frequency modulation technique. The modulation carrier frequency is in the KHz range which makes the modulation process transparent to the oscillator frequency. The controlled modulation process can be on all of one side of the nominal frequency (**DOWN SPREAD**) or equally spread either side of the nominal frequency (**CENTRE SPREAD**). If **OVER-CLOCKING** is a problem to the system then the down spread is preferred.

#### Instantaneous Frequencies (100MHz Nominal Frequency)

| Total Spread %                                    | Down Spread      |                   | Centre Spread    |                   |
|---------------------------------------------------|------------------|-------------------|------------------|-------------------|
|                                                   | Min              | Max               | Min              | Max               |
|                                                   | Down Range       | Up Range          | Down Range       | Up Range          |
| 0.5%                                              | -1.0%            | 0%                | -0.25%           | +0.25%            |
|                                                   | -5000ppm         | 0ppm              | -2500ppm         | +2500ppm          |
|                                                   | <b>99.500000</b> | <b>100.000000</b> | <b>99.750000</b> | <b>100.250000</b> |
| Note. Tri State not available with 0.5% versions. |                  |                   |                  |                   |
| 1%                                                | -1.0%            | 0%                | -0.5%            | +0.5%             |
|                                                   | -10000ppm        | 0ppm              | -5000ppm         | +5000ppm          |
|                                                   | <b>99.000000</b> | <b>100.000000</b> | <b>99.500000</b> | <b>100.500000</b> |
| 3%                                                | -3.0%            | 0%                | -1.5%            | +1.5%             |
|                                                   | -30000ppm        | 0ppm              | -15000ppm        | +15.000ppm        |
|                                                   | <b>97.000000</b> | <b>100.000000</b> | <b>98.500000</b> | <b>101.500000</b> |



#### EMI Reduction Data

Main mode: EMI reduction:

$$10\text{Log} \left( \frac{\text{Total spread \% x frequency (fo)}}{0.12} \right) \text{ dB}$$

3rd Harmonic: EMI reduction:

$$10\text{Log} \left( \frac{\text{Total spread \% x frequency(fo)x3}}{0.12} \right) \text{ dB}$$

5th Harmonic: EMI reduction:

$$10\text{Log} \left( \frac{\text{Total spread \% x frequency(fo)x5}}{0.12} \right) \text{ dB}$$

In line with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.


**ISO9001: 2000 Registered**

For quotations or further information please contact us at:  
 3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK  
<http://www.actcrystals.com>

Issue:5 M6  
 Date:01/02/06


## ACT9200SSC

EMI Example Test Data Nominal Frequency 100MHz Modulation Carrier 34.678KHz

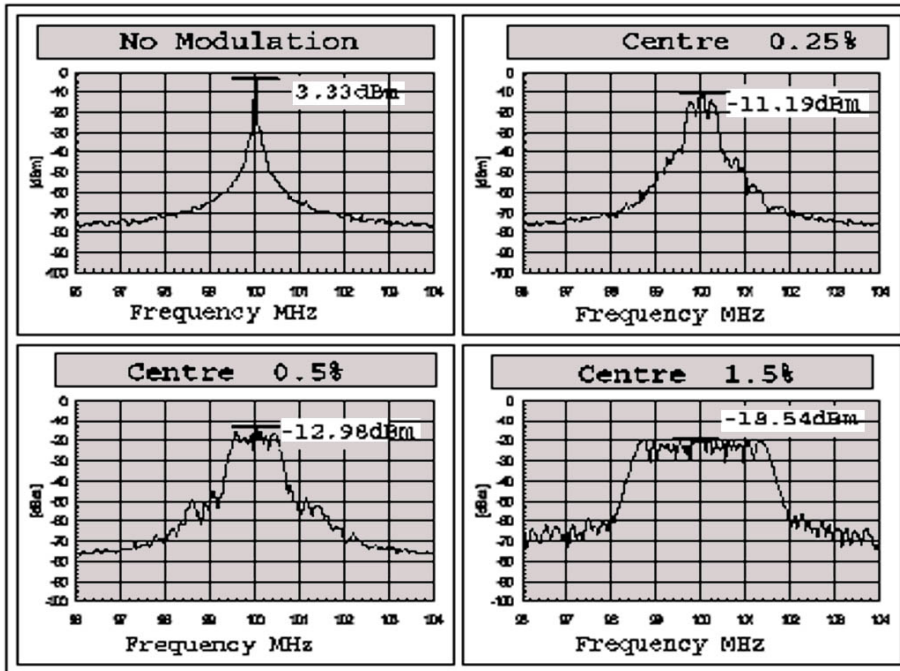

Example Whole Spectrum EMI Data

100MHz

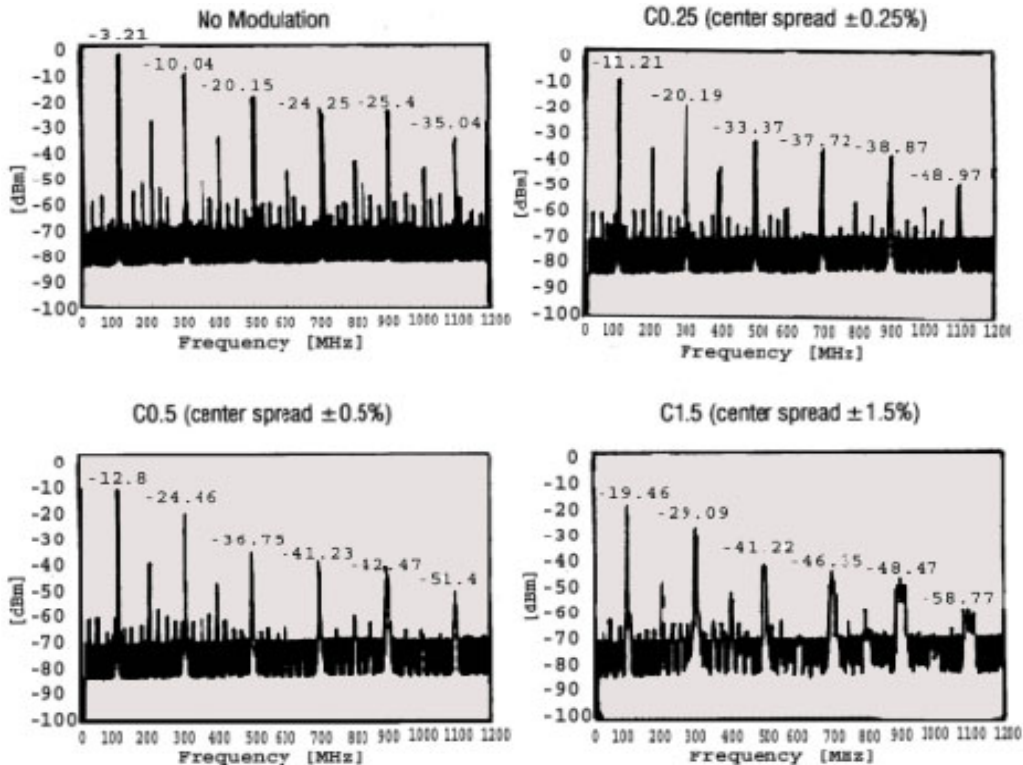

In line with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.


ISO9001: 2000 Registered

For quotations or further information please contact us at:  
 3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK  
<http://www.actcrystals.com>


Issue:5 M6  
 Date:01/02/06

## ACT9200SSC

### 13.1dBc EMI reduction

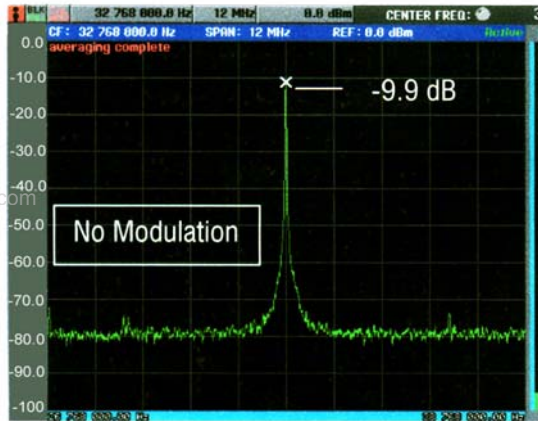

## ACT9200SSC REFLOW SPECIFICATION

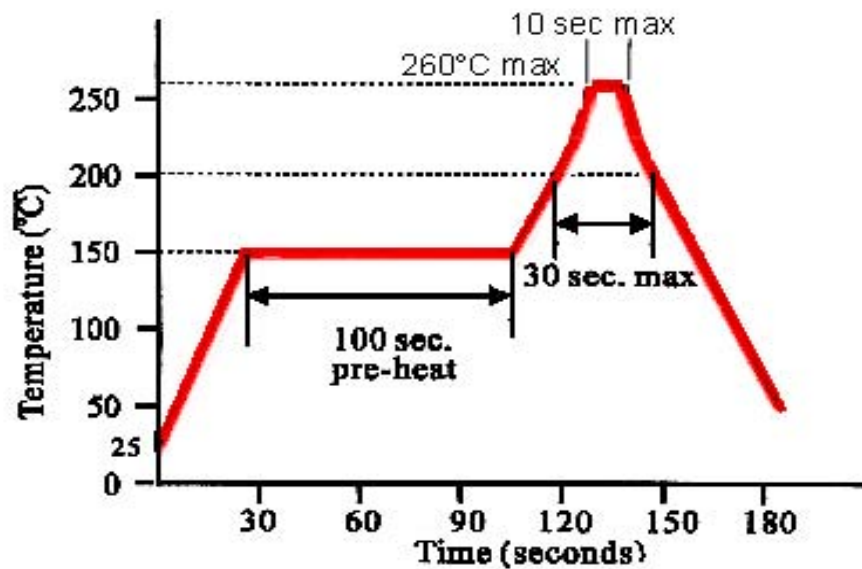

In line with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.


ISO9001: 2000 Registered

For quotations or further information please contact us at:  
 3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK  
<http://www.actcrystals.com>

Issue:5 M6  
 Date:01/02/06


## ACT9200SSC TAPE & REEL SPECIFICATIONS

### REEL

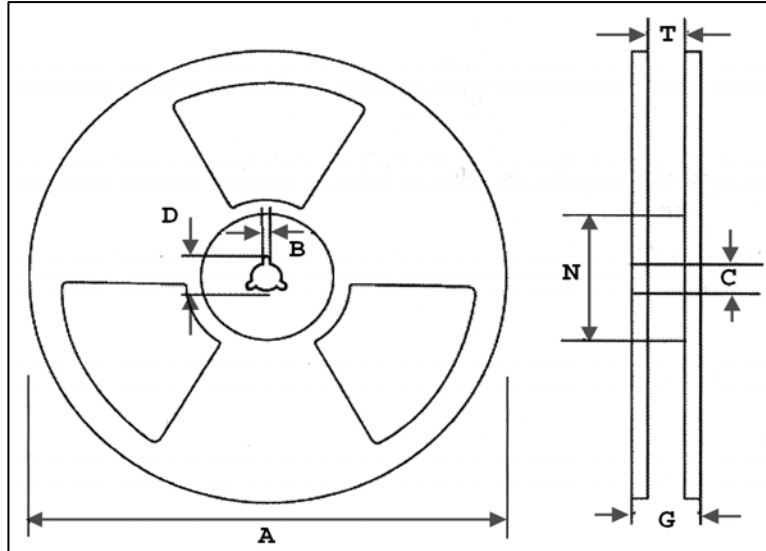

| A   | B±0.5 | D±1.0 | C±0.2 | N±1.0 | T±0.1 | G±2.0 | mm |
|-----|-------|-------|-------|-------|-------|-------|----|
| 180 | 2.2   | 20.2  | 13    | 62    | 16.5  | 20.5  |    |

### TAPE

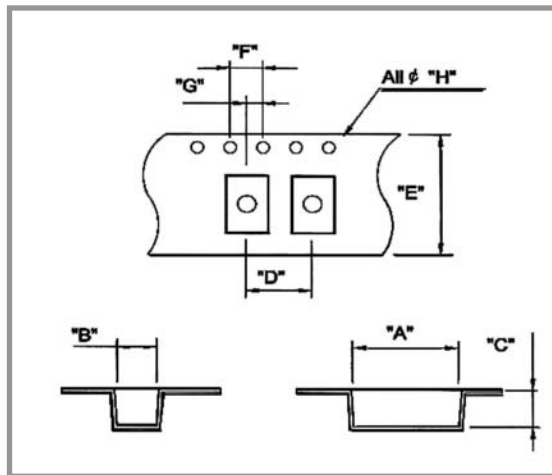

| A±0.1 | B±0.1 | C±0.1 | D±1.0 | E±0.1 | F±0.1 | G±0.05 | H+0.1-0 | mm |
|-------|-------|-------|-------|-------|-------|--------|---------|----|
| 7.7   | 5.3   | 1.8   | 8.0   | 16.0  | 4.0   | 2.0    | 1.5     |    |

In line with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.

ISO9001: 2000 Registered

For quotations or further information please contact us at:  
 3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK  
<http://www.actcrystals.com>

Issue:5 M6  
 Date:01/02/06