

# ADL-65052TL

## **AlGaInP Visible Laser Diode**

DATE : 2005/10/18 Ver 1.0

### ★650nm 5mW 50°C Low Current Operation

## • Features


1. Low operating current
2. High efficiency
3. FFP single lateral mode

## • Applications

1. Laser pointers
2. Industrial laser markers / measuring instruments
3. Bar code readers

- **Absolute maximum ratings**

| Parameter            | Symbol   | Condition | Rating  | Unit |
|----------------------|----------|-----------|---------|------|
| Light output power   | $P_O$    | CW        | 7       | mW   |
| Reverse voltage (LD) | $V_{RL}$ | -         | 2       | V    |
| Reverse voltage (PD) | $V_{RD}$ | -         | 30      | V    |
| Forward current (PD) | $I_{FD}$ | -         | 10      | mA   |
| Case temperature     | $T_C$    | -         | -10~+50 | °C   |
| Storage temperature  | $T_S$    | -         | -40~+85 | °C   |

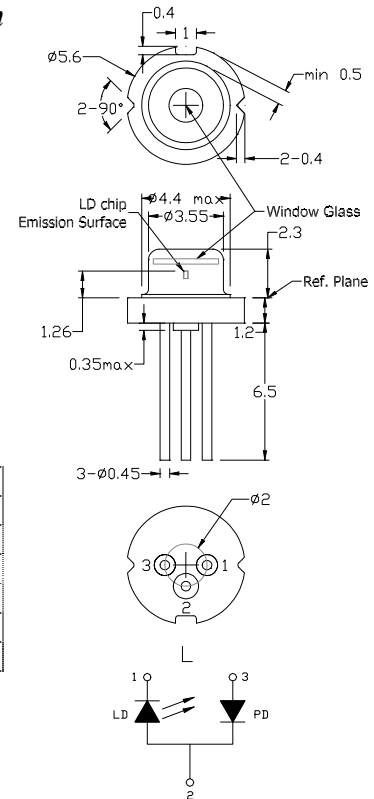

### •Electrical and optical characteristics ( $T_c=25^\circ\text{C}$ )

| Parameter                         | Symbol                       | Min. | Typ. | Max. | Unit    | Conditions           |
|-----------------------------------|------------------------------|------|------|------|---------|----------------------|
| Peak wavelength                   | $\lambda$                    | 645  | 655  | 660  | nm      | $P_o=5mW$            |
| Threshold current                 | $I_{th}$                     | -    | 15   | 20   | mA      |                      |
| Operating current                 | $I_{op}$                     | -    | 20   | 22   | mA      | $P_o=5mW$            |
| Operating voltage                 | $V_{op}$                     | -    | 2.2  | 2.5  | V       | $P_o=5mW$            |
| Differential efficiency           | $\eta$                       | 0.5  | 1.0  | 1.4  | mW/mA   | $P_o=3-5mW$          |
| Monitor current                   | $I_m$                        | 0.05 | 0.1  | 0.3  | mA      | $P_o=5mW, V_{FO}=5V$ |
| Parallel divergence angle         | $\theta_{  }$                | 6    | 8    | 12   | deg     |                      |
| Perpendicular divergence angle    | $\theta_{\perp}$             | 24   | 27   | 32   | deg     |                      |
| Parallel FFP deviation angle      | $\Delta \theta_{  }$         | -3   | 0    | +3   | deg     | $P_o=5mW$            |
| Perpendicular FFP deviation angle | $\Delta \theta_{\perp}$      | -3   | 0    | +3   | deg     |                      |
| Emission point accuracy           | $\Delta x \Delta y \Delta z$ | -80  | 0    | +80  | $\mu m$ |                      |

- **Precautions**


- \* Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

*\* For reference only. Contents above are subject to change without notice.*

## ***AlGaInP Visible Laser Diode***

**ADL-65052TL**

DATE : 2005/10/18 Ver 1.0

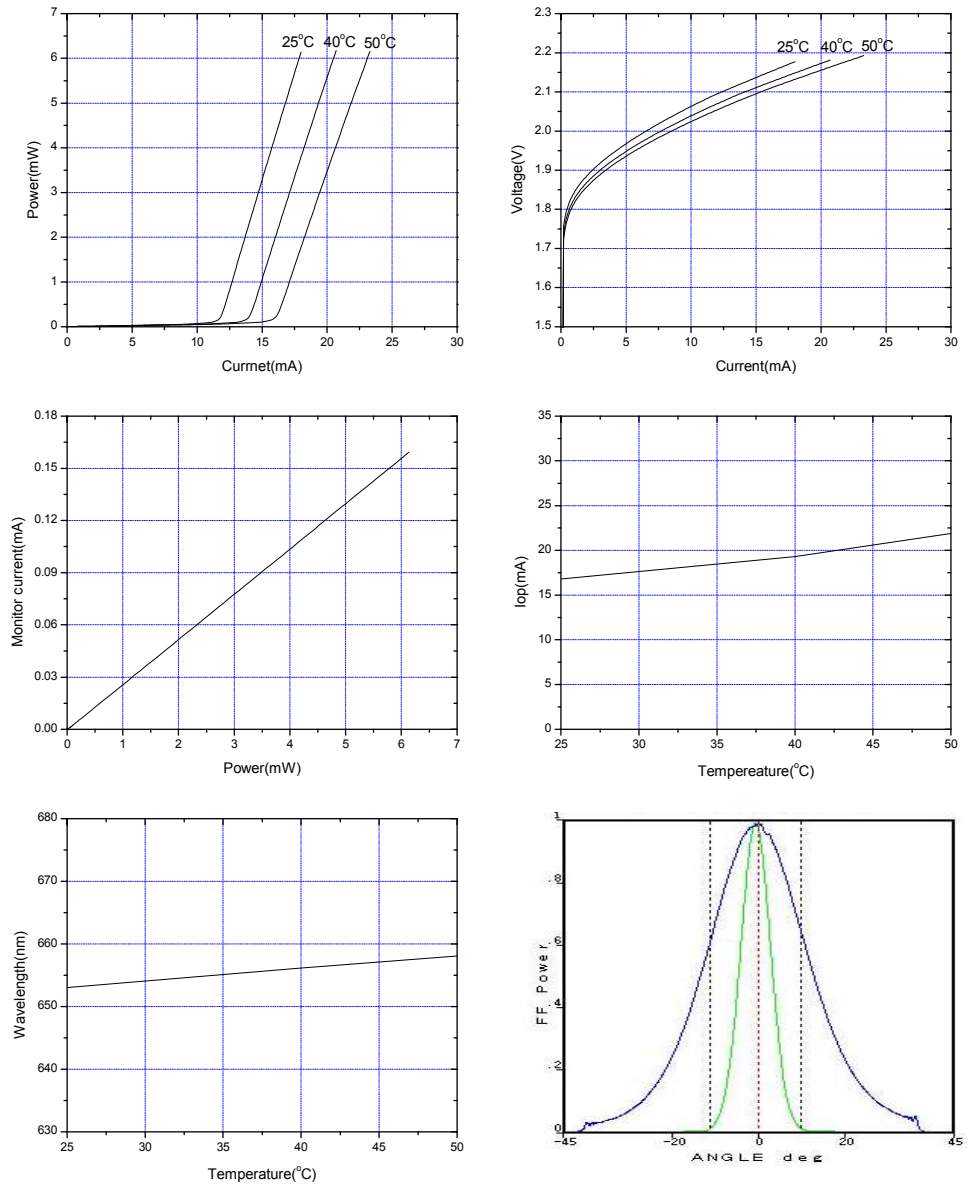

*\* For reference only. Contents above are subject to change without notice.*