

## AEH40 Series

132 Watts / 48 Watts

**Total Power:**  
132 Watts (for the 3.3 Vo device)  
48 Watts (for the 1.2 Vo device)  
**Input Voltage:** 36 - 75 VDC  
**# of Outputs:** Single



### Special Features

- Delivers up to 40A output current
- Basic Isolation
- Ultra High Efficiency
- Improved thermal performance: 40A at 70 °C at 1.5ms-1 (300LFM)
- High power density
- Low output noise
- Industry standard pinout
- 2:1 wide input voltage
- CNT function
- Remote sense
- Trim function: +10% / -20%
- Input under-voltage lockout
- Output over-current lockout
- Output over-voltage protection
- Over temperature protection
- RoHS Compliant

### Safety

UL cUL  
TUV

## Electrical Specifications

### Input

Input Range	36 to 75 VDC
Input Current (max.)	6.2 A (for the 3.3 Vo device) 2.0 A (for the 1.2 Vo device)
Input Reflected-ripple	20 mAp-p 5Hz to 20MHz: 12uH source impedance, TA=25 °C

### Current Output

### Output

Output voltage	3.25 to 3.35 Vdc (3.3 Vdc Nominal) 1.18 to 1.22 Vdc (1.2 Vdc Nominal)
Output Current	0 to 40 A
Efficiency	>87% (89% typ) : 3.3 Vo device >80% (81% typ) : 1.2 Vo device
Line output regulation	10 MV max. (5MV Nominal) : 3.3 Vo device 5 MV max. (3MV Nominal) : 1.2 Vo device
Load Output Regulation	20 mV max (10 mV Typ) : 3.3 Vo device 18 mV max (5 mV Typ) : 1.2 Vo device
Switching Frequency	280KHz for the 3.3 Vo 220KHz for the 1.2 Vo

### Isolation

I/O isolation	1500 Vdc
Isolation Capacitance	1000 pF
Isolation Resistance	>10 Mohms

## Environmental Specifications


Operating ambient temperature range	-40 °C to 70 °C
Storage temperature	-55 °C to 125 °C
Temperature Regulation	0.02 %Vo/°C
Calculated MTBF	2 Million hours (typ.); Io=Io-max; Tc=25 °C



## Ordering Information

Vin (V)	Vout (V)	Iout (A)	Effy	Model Number
36-75	3.3	40	89%	AEH40F48N
36-75	3.3	40	89%	AEH40F48
36-75	1.2	40	81%	AEH40K48N
36-75	1.2	40	81%	AEH40K48

## Mechanical Drawing

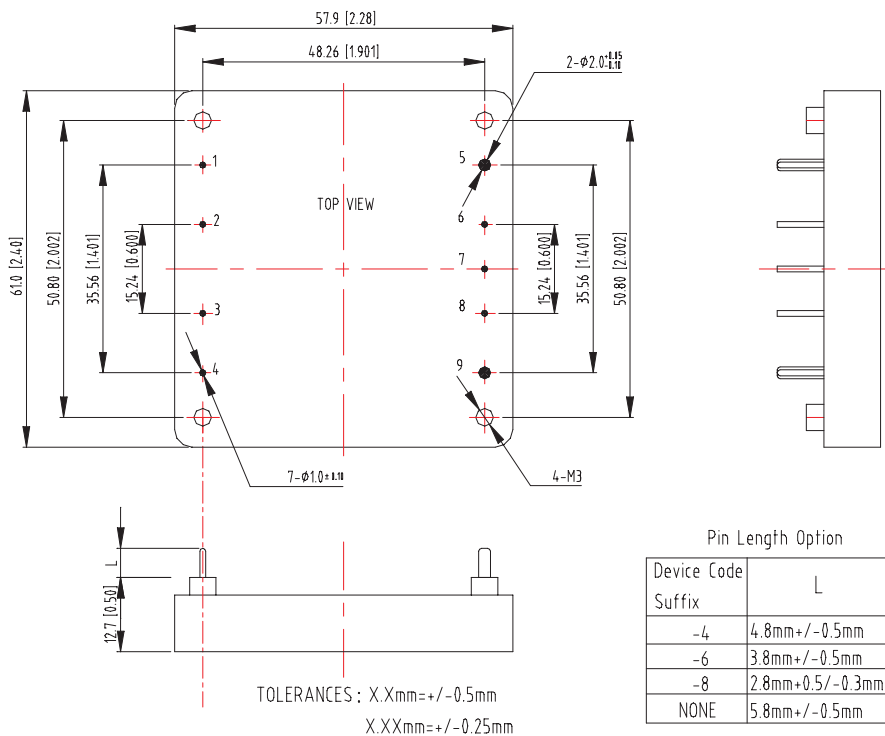

## Astec Power

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698  
Technical Support: +1 888 41 ASTEC  
or +1 407 241 2752

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

Units 2111-2116, Level 21  
Tower 1, Metroplaza  
223, Hing Fong Road  
Kwai Fong, New Territories  
Hong Kong  
Telephone: +852 2437 9662  
Facsimile: +852 2402 4426

For global contact, visit:  
[www.astecpower.com](http://www.astecpower.com)  
[technicalsupport@astec.com](mailto:technicalsupport@astec.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Astec Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Printed in USA

**Emerson Network Power.**  
The global leader in enabling  
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

**EmersonNetworkPower.com**

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2006 Emerson Electric Co.