

AF-12864L

•128 x 64 dots


1/64 Duty

FEATURE

1. Construction : LCD panel and COF.
2. Display type : FSTN, Positive, Transflective, Color, 1/64 Duty.
3. Driver : NT7502
4. Extended temperature type.

液晶之友 电话: 020-33819057
<http://www.lcdfriends.com>

BLOCK DIAGRAM

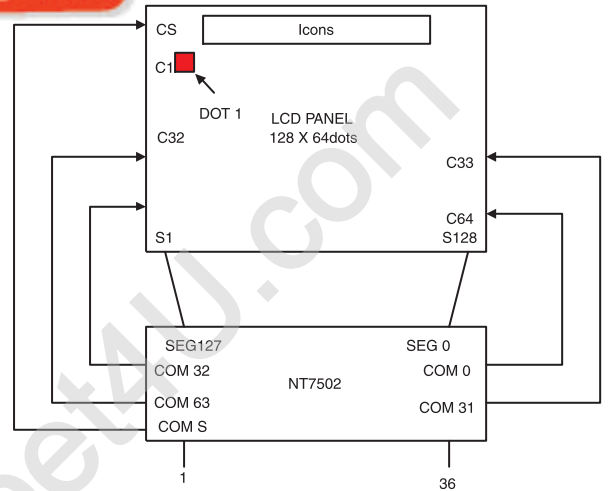

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Condition	Typ.Value	Unit.
LCD Driving Voltage	V0-VSS	25°C	9.96	V
Supply Current	IDD	VDD=3.3V	0.2	mA

INTERFACE

1	2	3	4	5	6	7	8	9	10	11	12
NC	CL	/CS1	/RES	A0	/WR	/RD	D0	D1	D2	D3	D4
13	14	15	16	17	18	19	20	21	22	23	24
D5	D6	D7	VDD	VSS	VOUT	CAP3+	CAP1-	CAP1+	CAP2+	CAP2-	VEXT
25	26	27	28	29	30	31	32	33	34	35	36
V1	V2	V3	V4	V0	VR	CLS	C86	P/S	/HPM	IRS	NC

