


1.SCOPE

SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal piezoelectrical chip. They are used in electronic equipments such as TV and so on.

2.Construction


2.1 Dimension and materials

Type: AF389A1M

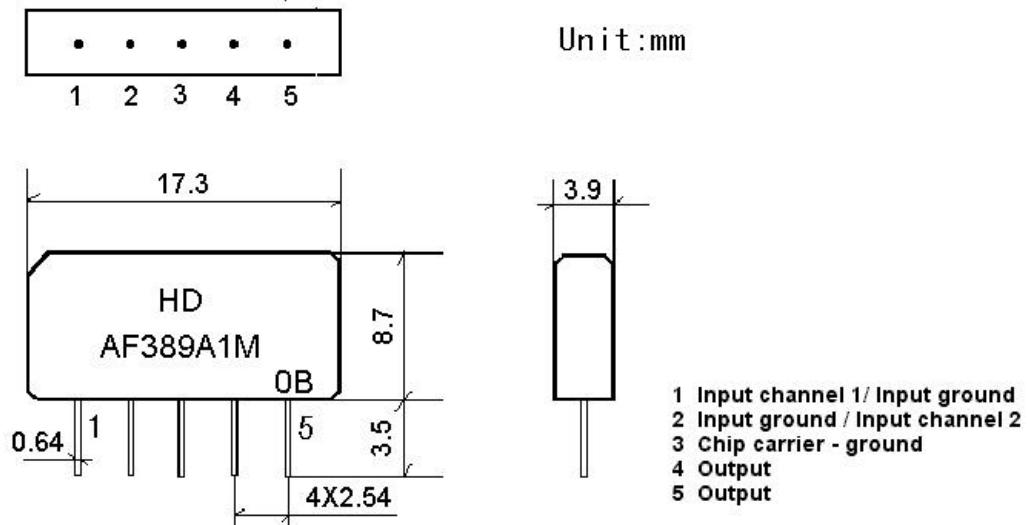


0: year (0,1,2,3,4,5,6,7,8,9)

B: product in this quarter (A:1~3,B:4~6,C:7~9,D:10~12)

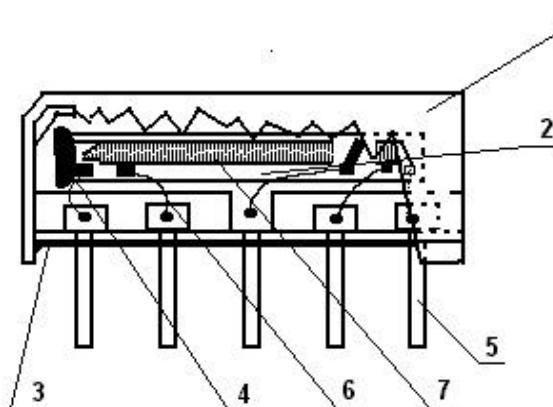

Components	Materials
1. Outer casing	PPS
2. Substrate	Lithium niobate
3. Base	Epoxy resin
4. Absorber	Epoxy resin
5. Lead	Cu alloy+Au plate
6. Bonding wire	AlSi alloy
7. Electrode	Al

2.2. Circuit construction, measurement circuit

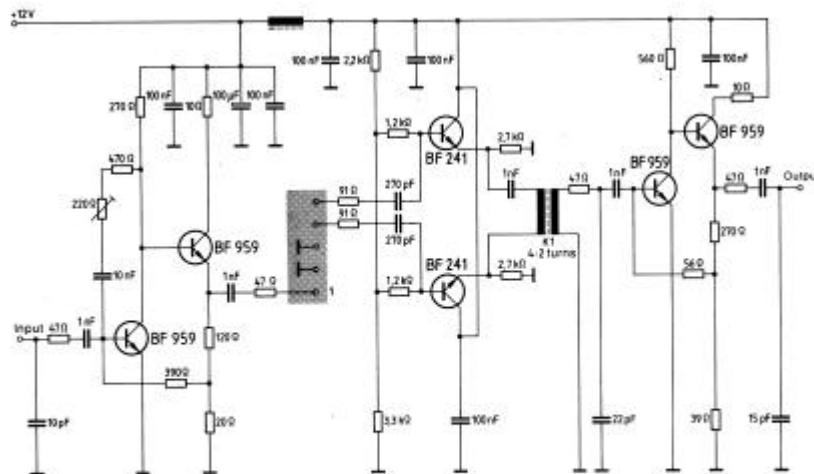

Test circuit for SIP-5 filter
Input impedance of the symmetrical post-amplifier: 2 k Ω in parallel with 3 pF

3. Characteristics

Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests is as follows;

Ambient temperature : 15 to 35

Relative humidity : 25% to 85%

Air pressure : 86kPa to 106kPa

Operating temperature range

Operating temperature range is the range of ambient temperatures in which the filter can be operated continuously. -10 ~ +60

Storage temperature range

Storage temperature range is the range of ambient temperatures at which the filter can be stored without damage.

Conditions are as specified elsewhere in these specifications. -40 ~ +70

Reference temperature +25

3.1 Maximum Rating

DC voltage	VDC	12	V	Between any terminals
AC voltage	Vpp	10	V	Between any terminals

3.2 Electrical Characteristics

Characteristics of channel 1 (switching input pin 2 connected to ground pin 3)

Source impedance Z_s=50

Load impedance Z_L=2k //3pF T_A=25

Item	Freq	min	typ	max	
Insertion attenuation Reference level	40.40MHz	12.2	14.2	16.2	dB
Relative attenuation	33.90MHz	38.0	47.0	-	dB
	38.40MHz	40.0	50.0	-	dB
	41.90MHz	34.0	42.0	-	dB
	32.40MHz	38.0	47.0	-	dB
Sidelobe	25.00~38.40MHz	35.0	42.0	-	dB
	41.90~45.00MHz	30.0	36.0	-	dB
Temperature coefficient		-72			ppm/k

Characteristics of channel 2 (switching input pin 2 connected to input pin 1)

Source impedance Z_s=50

Load impedance Z_L=2k //3pF T_A=25

Item	Freq	min	typ	max	
Insertion attenuation Reference level	33.40MHz	13.0	15.0	17.0	dB
Relative attenuation	33.05MHz	-1.8	-0.3	1.2	dB
	32.90MHz	-1.4	0.1	1.6	dB
	32.40MHz	-1.7	-0.2	1.3	dB
	38.90MHz	35.0	45.0	-	dB
	34.47MHz	20.0	30.0	-	dB
	30.90MHz	30.0	36.0	-	dB
	40.40MHz	32.0	40.0	-	dB
	40.90MHz	32.0	42.0	-	dB
	41.40MHz	32.0	45.0	-	dB
Sidelobe	25.00~30.50MHz	35.0	42.0	-	dB
	40.40~45.00MHz	30.0	38.0	-	dB
Temperature coefficient		-72			ppm/k

3.3 Environmental Performance Characteristics

Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70 1000H	< 1.0
Low temperature test	< 1.0

-40 1000H	
Humidity test 40 90-95% 1000H	< 1.0
Thermal shock -20 ==25 ==80 20 cycle 30M 10M 30M	< 1.0
Solder temperature test Solder temp.260 for 10 sec.	< 1.0
Soldering Immerse the pins melt solder at 260 +5/-0 for 5 sec.	More than 95% of total area of the pins should be covered with solder

3.4 Mechanical Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0
Drop test On maple plate from 1 m high 3 times	<1.0
Lead pull test Pull with 1 kg force for 30 seconds	<1.0
Lead bend test 90° bending with 500g weight 2 times	<1.0

3.5 Voltage Discharge Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode	<1.0

