


## 1.SCOPE

SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal piezoelectrical chip. they are used in electronic equipments such as TV and so on.

## 2.Construction


### 2.1 Dimension and materials

Type : AF389A5M

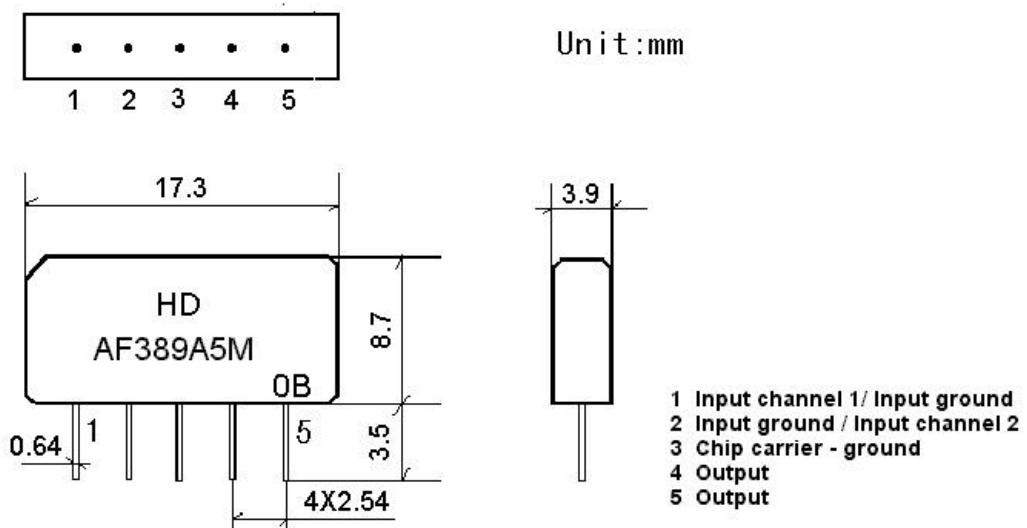


0: year(0,1,2,3,4,5,6,7,8,9)

B:product in this quarter(A:1~3,B:4~6,C:7~9,D:10~12)

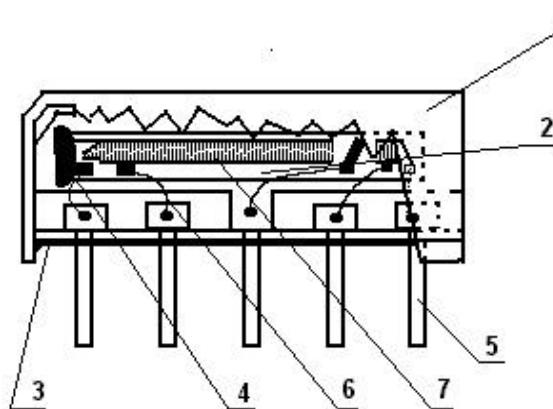

Components	Materials
1. Outer casing	PPS
2. Substrate	Lithium niobate
3. Base	Epoxy resin
4. Absorber	Epoxy resin
5. Lead	Cu alloy+Au plate
6. Bonding wire	AlSi alloy
7. Electrode	Al

## 2.2. Circuit construction, measurement circuit

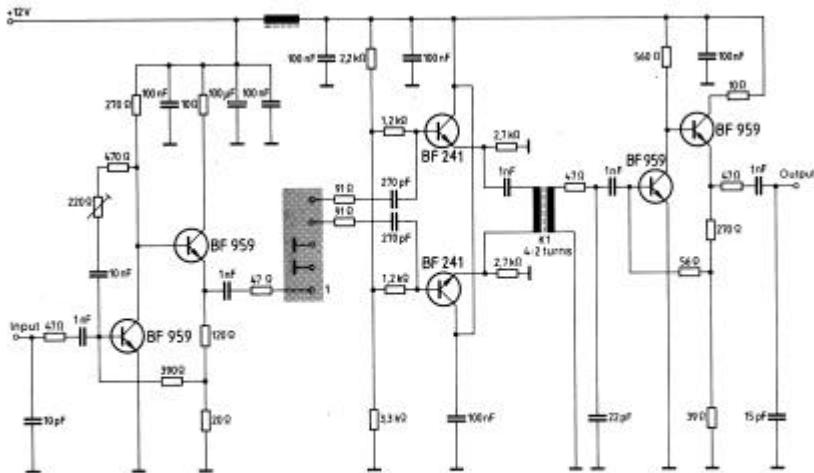

Test circuit for SIP-5 filter  
Input impedance of the symmetrical post-amplifier:  $2\text{ k}\Omega$  in parallel with  $3\text{ pF}$

## 3. Characteristics

### Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests is as follows;

Ambient temperature : 15 to 35

Relative humidity : 25% to 85%

Air pressure : 86kPa to 106kPa

### Operating temperature rang

Operating temperature range is the range of ambient temperatures in which the filter can be operated continuously. -10 ~ +60

### Storage temperature rang

Storage temperature range is the range of ambient temperatures at which the filter can be stored without damage.

Conditions are as specified elsewhere in these specifications. -40 ~ +70

Reference temperature                    +25

### 3.1 Maximum Rating

<b>DC voltage</b>	<b>VDC</b>	<b>12</b>	<b>V</b>	<b>Between any terminals</b>
<b>AC voltage</b>	<b>Vpp</b>	<b>10</b>	<b>V</b>	<b>Between any terminals</b>

### 3.2 Electrical Characteristics

#### Characteristics of channel 1

Source impedance  $Z_s=50$   
 Load impedance  $Z_L=2k \parallel 3pF$   $T_A=25$

Item	Freq	min	typ	max	
Insertion attenuation Reference level	34.40MHz	13.8	15.8	17.8	dB
Relative attenuation	38.90MHz	38.0	47.0	-	dB
	35.32MHz	22.0	32.0	-	dB
	32.90MHz	30.0	38.0	-	dB
	40.40MHz	38.0	50.0	-	dB
Sidelobe	25.00~32.90MHz	25.0	32.0	-	dB
	38.90~45.00MHz	32.0	41.0	-	dB
Temperature coefficient		-72			ppm/k

#### Characteristics of channel 2

Source impedance  $Z_s=50$   
 Load impedance  $Z_L=2k \parallel 3pF$   $T_A=25$

Item	Freq	min	typ	max	
Insertion attenuation Reference level	33.40MHz	14.4	16.4	18.4	dB
Relative attenuation	32.35MHz	-1.3	0.2	1.7	dB
	32.40MHz	-	0.1	-	dB
	32.90MHz	-1.8	-0.3	1.2	dB
	38.90MHz	32.0	40.0	-	dB
	34.47MHz	20.0	30.0	-	dB
	30.90MHz	35.0	42.0	-	dB
	40.40MHz	38.0	48.0	-	dB
	40.90MHz	36.0	42.0	-	dB
	41.40MHz	32.0	41.0	-	dB
Sidelobe	25.00~30.90MHz	32.0	41.0	-	dB
	38.90~45.00MHz	32.0	40.0	-	dB
Temperature coefficient		-72			ppm/k

### 3.3 Environmental Performance Characteristics

Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70 1000H	< 1.0
Low temperature test -40 1000H	< 1.0
Humidity test 40 90-95% 1000H	< 1.0
Thermal shock	< 1.0

-20 ==25 ==80 20 cycle 30M 10M 30M	
Solder temperature test Sold temp.260 for 10 sec.	< 1.0
Soldering Immerse the pins melt solder at 260 +5/-0 for 5 sec.	More then 95% of total area of the pins should be covered with solder

### 3.4 Mechanical Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0
Drop test On maple plate from 1 m high 3 times	<1.0
Lead pull test Pull with 1 kg force for 30 seconds	<1.0
Lead bend test 90° bending with 500g weigh 2 times	<1.0

### 3.5 Voltage Discharge Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode	<1.0

---