


## 1.SCOPE

SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal piezoelectrical chip. They are used in electronic equipments such as TV and so on.

## 2.Construction


### 2.1 Dimension and materials

Type : AF389A6M

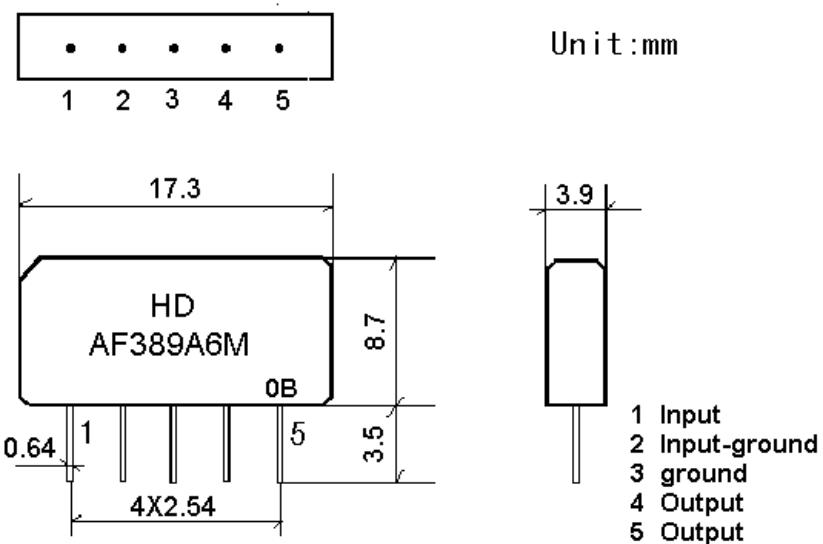


0: year(0,1,2,3,4,5,6,7,8,9)

B:product in this quarter(A:1~3,B:4~6,C:7~9,D:10~12)

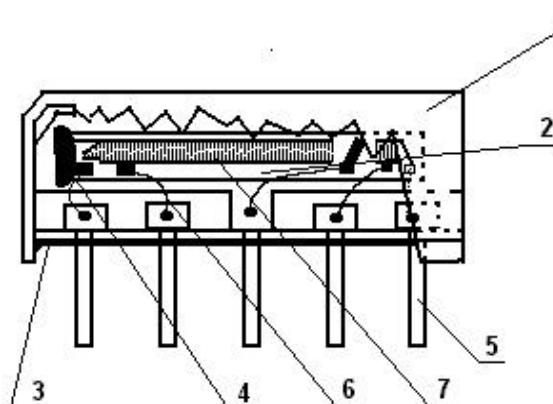

Components	Materials
1. Outer casing	PPS
2. Substrate	Lithium niobate
3. Base	Epoxy resin
4. Absorber	Epoxy resin
5. Lead	Cu alloy+Au plate
6. Bonding wire	AISI alloy
7. Electrode	Al

## 2.2. Circuit construction, measurement circuit

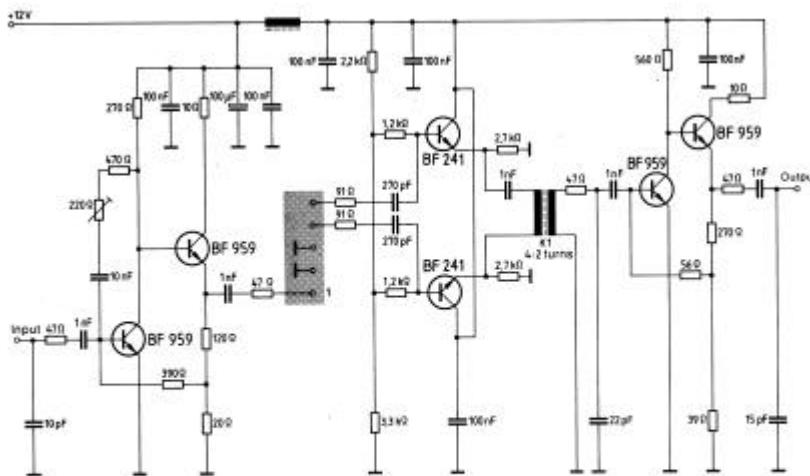

Test circuit for SIP-5 filter  
Input impedance of the symmetrical post-amplifier:  $2\text{ k}\Omega$  in parallel with  $3\text{ pF}$

### **3.Characteristics**

## **Standard atmospheric conditions**

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests is as follows:

Ambient temperature : 15 to 35

Relative humidity : 25% to 85%

Air pressure : 86kPa to 106kPa

#### Operating temperature range

Operating temperature range is the range of ambient temperatures in which the filter can be operated continuously. -10 ~ +60

#### Storage temperature range

Storage temperature range is the range of ambient temperatures at which the filter can be stored without damage.

Conditions are as specified elsewhere in these specifications. -40 ~ +70

## Reference temperature

### 3.1 Maximum Rating

<b>DC voltage</b>	VDC	12	V	Between any terminals
<b>AC voltage</b>	Vpp	10	V	Between any terminals

### 3.2 Electrical Characteristics

Source impedance	Zs=50				
Load impedance	Z <sub>L</sub> = 2k //3pF				T <sub>A</sub> =25
Item	Freq	min	typ	max	
Insertion attenuation Reference level	38.90MHz	16.3	18.3	20.3	dB
	32.90MHz	-1.4	0.1	1.6	dB
	32.35MHz	-1.9	-0.4	1.1	dB
	33.40MHz	-1.4	0.1	1.6	dB
	34.47MHz	25.0	35.0	-	dB
	30.90MHz	35.0	46.0	-	dB
	40.90MHz	36.0	47.0	-	dB
	40.35MHz	35.0	50.0	-	dB
Sidelobe	25.00~30.90MHz	32.0	39.0	-	dB
	40.40~45.00MHz	31.0	38.0	-	dB
Temperature coefficient		-72			ppm/k

### 3.3 Environmental Performance Characteristics

Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70 1000H	< 1.0
Low temperature test -40 1000H	< 1.0
Humidity test 40 90-95% 1000H	< 1.0
Thermal shock -20 ==25 ==80 20 cycle 30M 10M 30M	< 1.0
Solder temperature test Solder temp.260 for 10 sec.	< 1.0
Soldering Immerse the pins melt solder at 260 +5/-0 for 5 sec.	More than 95% of total area of the pins should be covered with solder


### 3.4 Mechanical Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0
Drop test On maple plate from 1 m high 3 times	<1.0
Lead pull test Pull with 1 kg force for 30 seconds	<1.0
Lead bend test 90° bending with 500g weight 2 times	<1.0

### 3.5 Voltage Discharge Test


Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode	<1.0

### 3.6 Frequency response:

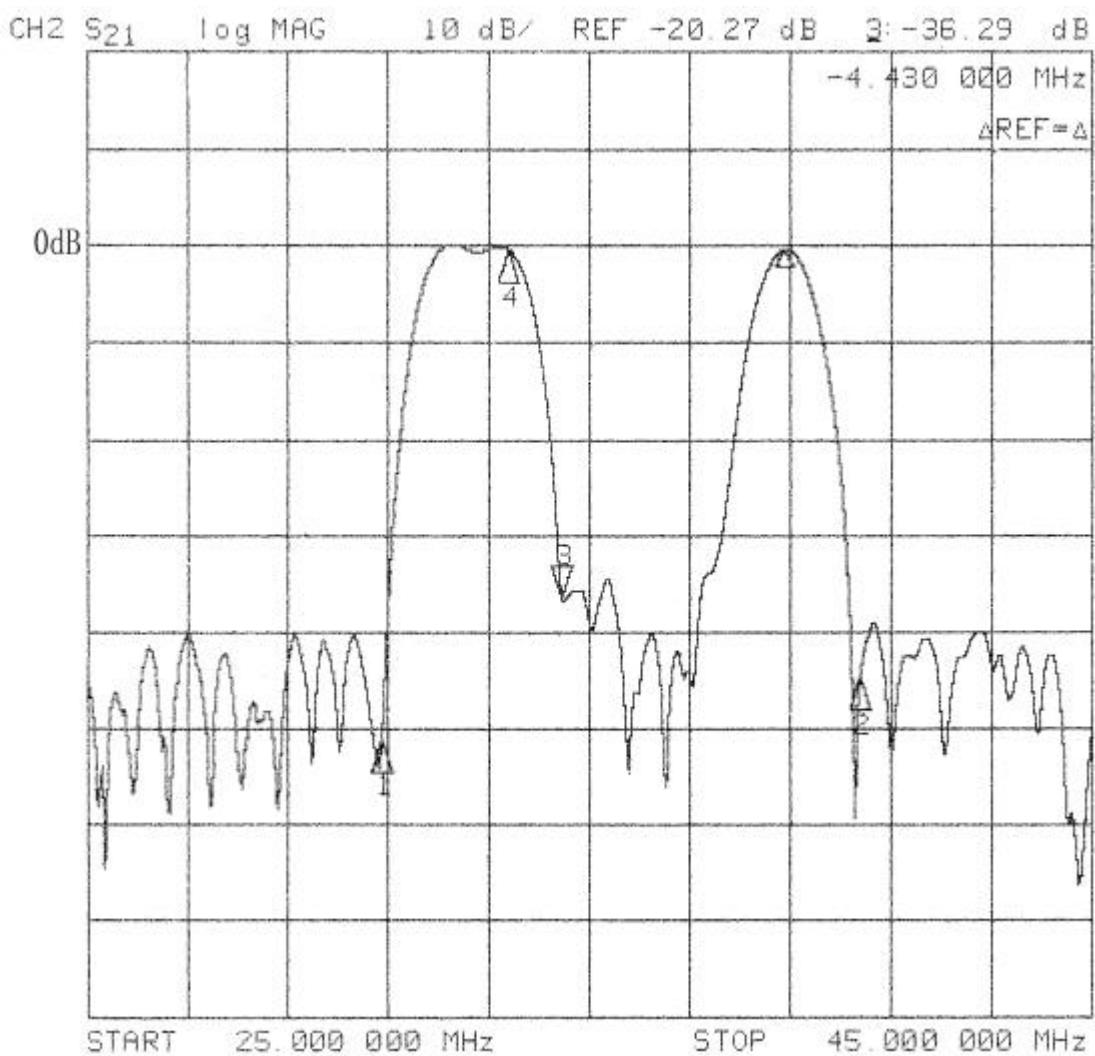

CH1 S21      log MAG  
CH2 S21      delay

1 dB/  
30 ns/      REF -20.53 dB  
                REF 1.197  $\mu$ s      4 -1559 dB  
                4 -20.406 ns

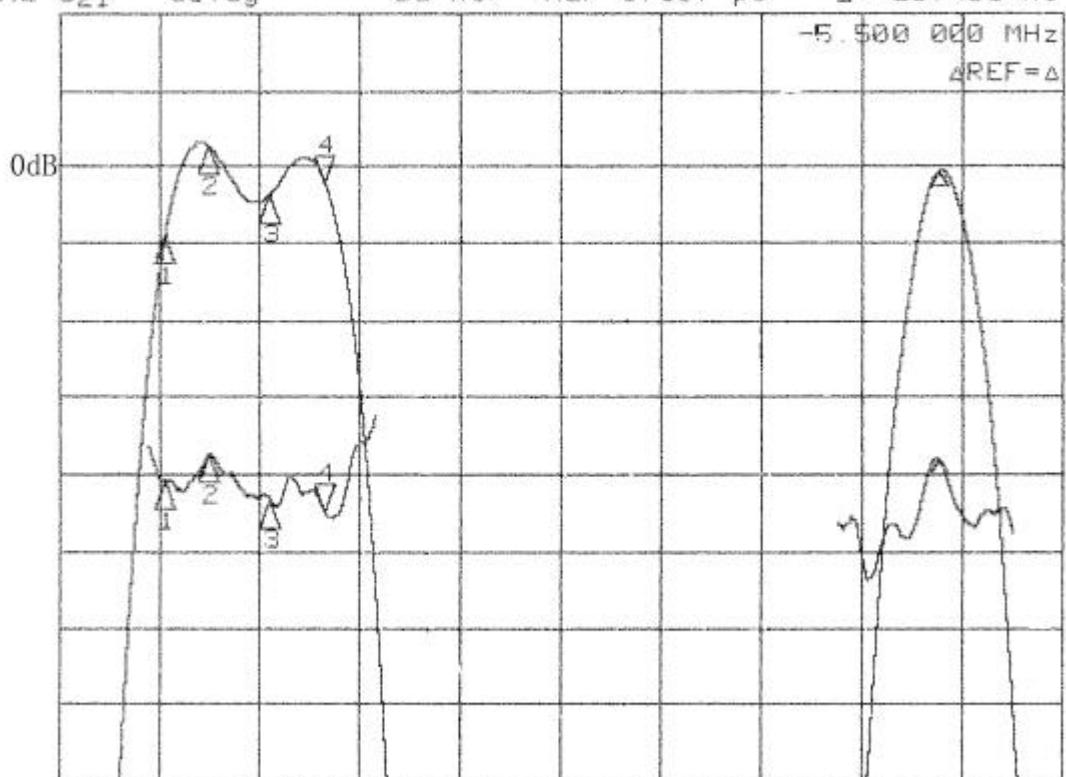

START 31.000 000 MHz

STOP 40.000 000 MHz