

**Features**

- Low power consumption
- Low voltage drop
- Low temperature coefficient
- Low Quiescent Current: 3uA at 6V
- Output voltage accuracy: tolerance  $\pm 2\%$

**Applications**


- Battery-powered equipment
- Reference voltage sources
- Cameras, video cameras
- Portable AV systems
- Mobile phones
- Portable games

**General Description**

AF6206N series are a highly precise, lower consumption, 3 terminal, positive voltage regulators manufactured using CMOS and laser trimming technologies. The series provides large currents with a significantly small dropout voltage.

The AF6206N consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error correction circuit. The series is compatible with low ESR ceramic capacitors. The

current limiter's foldback circuit operates as a short circuit protection as well as the output current limiter for the output pin. Output voltages are internally by laser trimming technologies. It is selectable in 0.1V increments within a range of 1.2V to 5.0V. AF6206N series are available in SOT-23 and SOT23-3

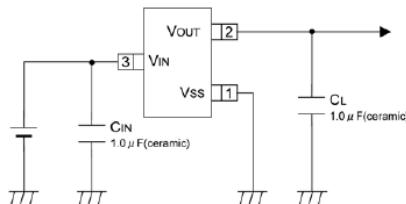**Typical Application****Order Information**


Designator	Symbol	Description
(1)(2)	Integer	Output Voltage(2.1~5.0V)

AF6206N-(1)(2)(3)(4)


③	N	Package:SOT23
	M	Package:SOT23-3
④	R	RoHS / Pb Free
	G	Halogen Free

Note:"①②" stands for output voltages. Other voltages can be specially customized


### Block Diagram

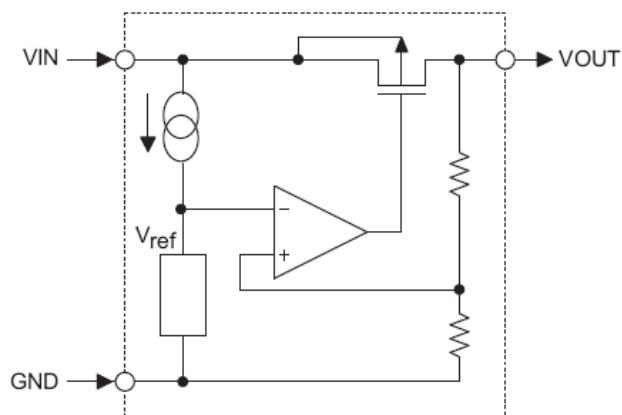

### Pin Assignment

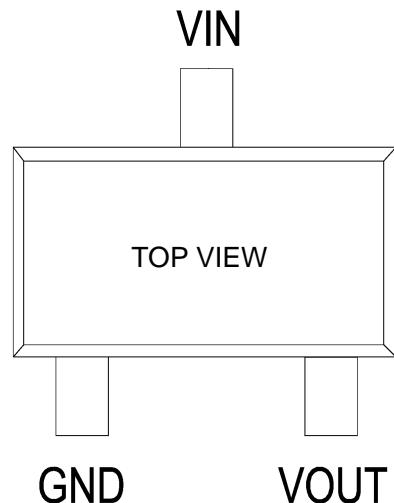

SOT23-3 and SOT23

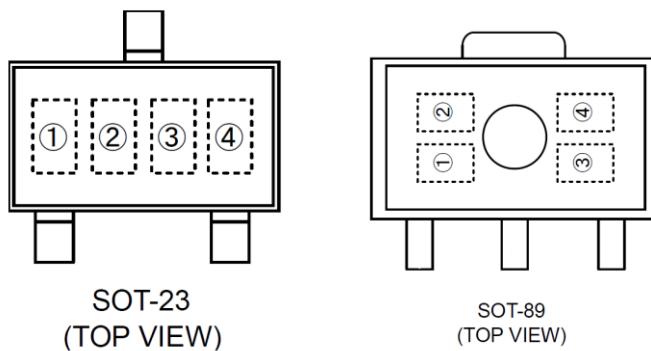**Marking Rule**

① represents product number

MARK	PRODUCT SERIES
6	AF6206N****

② represents 3 pins regulator

MARK	PRODUCT SERIES
VOLTAGE=0.1~3.0V	VOLTAGE=3.1V~6.0V
5	6

③ represents output voltage

MARK	VOLTAGE(V)		MARK	VOLTAGE(V)		
0	-	3.1	-	F	1.6	4.6
1	-	3.2	-	H	1.7	4.7
2	-	3.3	-	K	1.8	4.8
3	-	3.4	-	L	1.9	4.9
4	-	3.5	-	M	2.0	5.0
5	-	3.6	-	N	2.1	-
6	-	3.7	-	P	2.2	-
7	-	3.8	-	R	2.3	-
8	-	3.9	-	S	2.4	-
9	-	4.0	-	T	2.5	-
A	-	4.1	-	U	2.6	-
B	1.2	4.2	-	V	2.7	-
C	1.3	4.3	-	X	2.8	-
D	1.4	4.4	-	Y	2.9	-
E	1.5	4.5	-	Z	3.0	-

④ X



# AF6206N

## 300mA Low Power LDO

### Absolute Maximum Ratings

Parameter	Symbol	Ratings	Units
Input Voltage	V <sub>IN</sub>	10	V
Output Current	I <sub>OUT</sub>	300*	mA
Output Voltage	V <sub>OUT</sub>	V <sub>SS</sub> -0.3~V <sub>IN</sub> +0.3	V
Power Dissipation	SOT-23	0.20	W
	SOT-89	0.50	W
	USP-6B	0.10	W
	TO-92	0.30	W
Operating Temperature Range	T <sub>opr</sub>	-40~+85	°C
Storage Temperature Range	T <sub>stg</sub>	-55~+125	°C

\*I<sub>OUT</sub>=P<sub>d</sub>/(V<sub>IN</sub>-V<sub>OUT</sub>)

### Electrical Characteristics

AF6206N for any output voltage

(Ta=25°C)


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V <sub>out</sub>	V <sub>in</sub> =V <sub>out</sub> +1V 1.0mA≤I <sub>out</sub> ≤30mA	V <sub>out</sub> ×0.98	--	V <sub>out</sub> ×1.02	V
Output Current*1	I <sub>out</sub>	V <sub>in</sub> -V <sub>out</sub> =1V	--	300	--	mA
Low dropout*2	V <sub>drop</sub>	Refer to the next table				
Line Regulation	△V <sub>out1</sub> /(V <sub>in</sub> -V <sub>out</sub> )	1.6V≤V <sub>in</sub> ≤8V I <sub>out</sub> =40mA	--	0.05	0.2	%/V
Load Regulation	△V <sub>out</sub> /△I <sub>out</sub>	V <sub>in</sub> = V <sub>out</sub> +1V 1.0mA≤I <sub>out</sub> ≤80mA	--	12	30	mV
Output voltage Temperature Coefficient	△V <sub>out</sub> /(T <sub>a</sub> ·V <sub>out</sub> )	I <sub>out</sub> =30mA 0°C≤T <sub>a</sub> ≤70°C	--	±100	--	Ppm/°C
Supply Current	I <sub>ss</sub>	--	--	3	5	uA
Input Voltage	V <sub>in</sub>	--	--	8	10	V
PSRR	PSRR	F=1KHz V <sub>in</sub> =V <sub>out</sub> +1V	--	50	--	dB
Output Noise	EN	BW=10Hz~100KHz	--	30	--	uVRms

Electrical Characteristics by Output Voltage:


Output Voltage Vout(V)	Dropout Voltage Vdif (V)		
	Conditions	Typ.	Max.
Vout≤1.5V	Iout=100 mA	0.35	0.57
1.8 ≤ Vout ≤ 2		0.28	0.42
2.8 ≤ Vout ≤ 5.0		0.19	0.35


**Typical Performance Characteristics**

(1) Output Voltage vs Input voltage and Output Voltage vs. Output Current and Input Transient Response

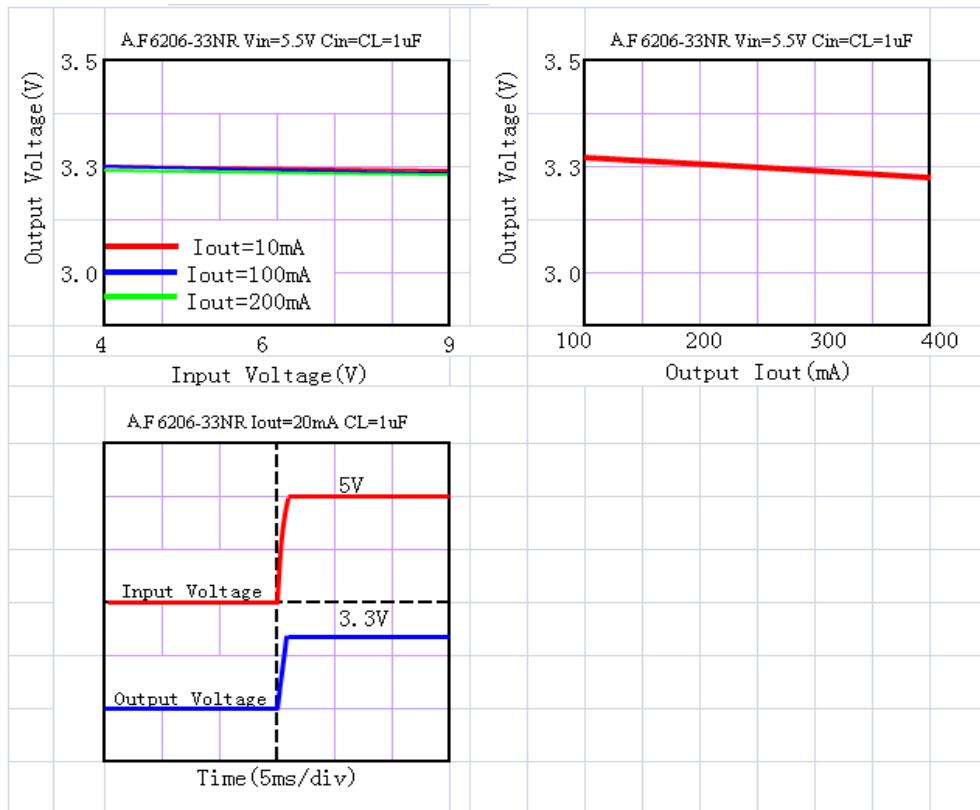


(2) Output Voltage vs. Ambient Temperature

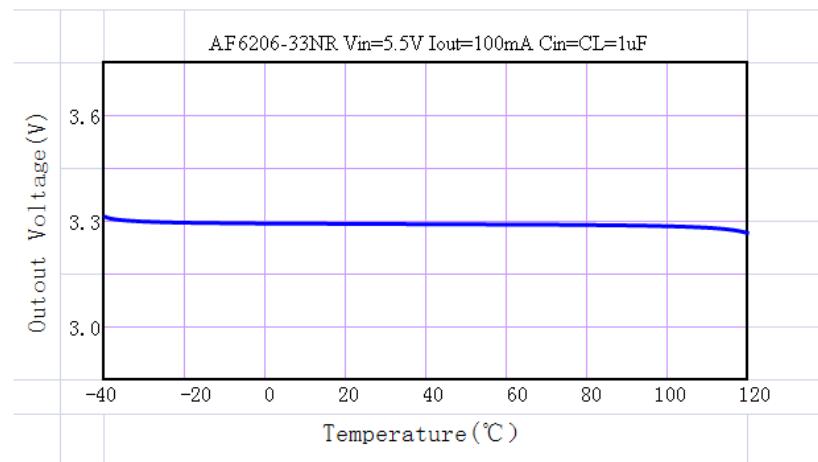

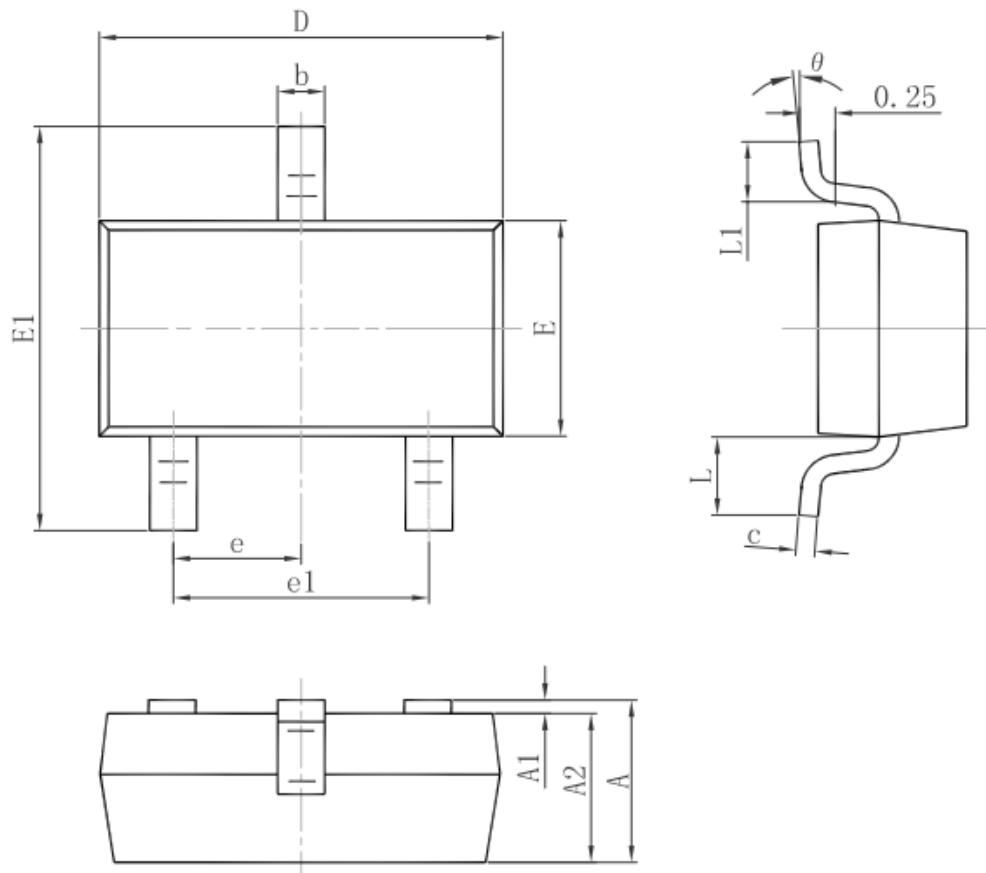**Package Information****3-pin SOT23 Outline Dimensions**

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

## 3-pin SOT23-3 Outline Dimensions

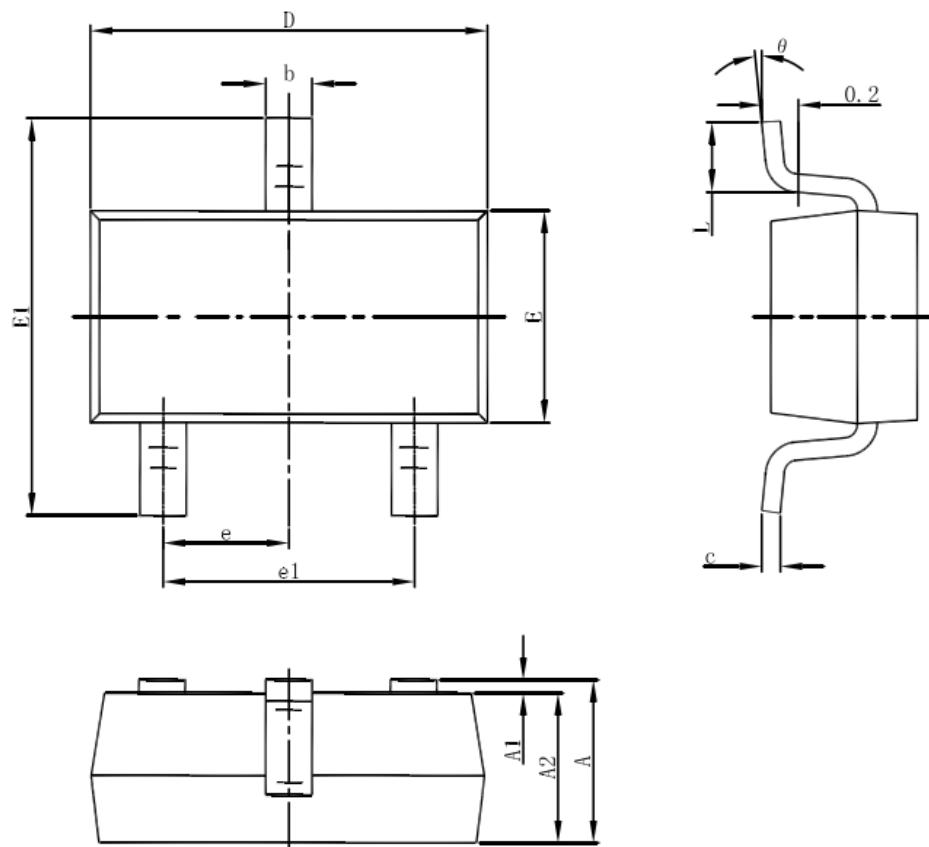

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°



AF6206N

***300mA Low Power LDO***

---

#### **DISCLAIMER**

ANALOG FUTURE COMPANY RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. ANALOG FUTURE DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE A STATISTICAL SUMMARY BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G., OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.