



**Alfa-MOS
Technology**

**AFP1073
20V P-Channel
Enhancement Mode MOSFET**


General Description

AFP1073, P-Channel enhancement mode MOSFET, uses Advanced Trench Technology to provide excellent $R_{DS(ON)}$, low gate charge. These devices are particularly suited for low voltage power management, such as smart phone and notebook computer, and low in-line power loss are needed in commercial industrial surface mount applications.

Features

- -20V/-0.45A, $R_{DS(ON)} = 620 \text{ m}\Omega$ @ $V_{GS} = -4.5\text{V}$
- -20V/-0.35A, $R_{DS(ON)} = 860 \text{ m}\Omega$ @ $V_{GS} = -2.5\text{V}$
- -20V/-0.25A, $R_{DS(ON)} = 1450 \text{ m}\Omega$ @ $V_{GS} = -1.8\text{V}$
- Low Offset (Error) Voltage
- Low-Voltage Operation
- High-Speed Circuits
- Low Battery Voltage Operation
- SOT-723 package design

Pin Description (SOT-723)

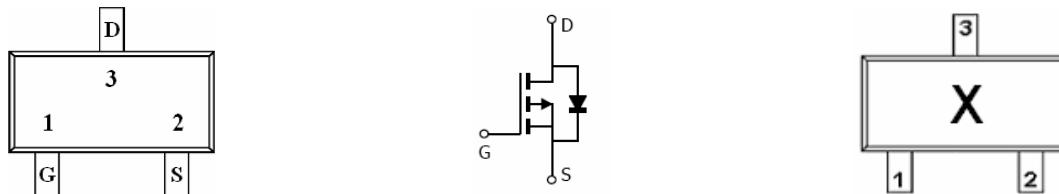

Application

- Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Memories
- Battery Operated Systems
- Power Supply Converter Circuits
- Load/Power Switching Smart Phones, Pagers

Pin Define

Pin	Symbol	Description
1	G	Gate
2	S	Source
3	D	Drain

Ordering Information

Part Ordering No.	Part Marking	Package	Unit	Quantity
AFP1073S72RG	X	SOT-723	Tape & Reel	8000 EA

※ AFP1073S52RG : 7" Tape & Reel ; Pb- Free ; Halogen –Free



Absolute Maximum Ratings

($T_A=25^\circ\text{C}$ Unless otherwise noted)

Parameter	Symbol	Typical	Unit
Drain-Source Voltage	V_{DSS}	-20	V
Gate -Source Voltage	V_{GSS}	± 12	V
Continuous Drain Current($T_J=150^\circ\text{C}$)	I_D	-0.7	A
$T_A=70^\circ\text{C}$		-0.4	
Pulsed Drain Current	I_{DM}	-1.0	A
Continuous Source Current(Diode Conduction)	I_S	-0.3	A
Power Dissipation	P_D	0.27	W
$T_A=70^\circ\text{C}$		0.16	
Operating Junction Temperature	T_J	-55/150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55/150	$^\circ\text{C}$







Electrical Characteristics

($T_A=25^\circ\text{C}$ Unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0\text{V}, I_D=-250\mu\text{A}$	-20			V
Gate Threshold Voltage	$V_{GS(\text{th})}$	$V_{DS}=V_{GS}, I_D=-250\mu\text{A}$	-0.4		-1.0	
Gate Leakage Current	I_{GSS}	$V_{DS}=0\text{V}, V_{GS}=\pm 12\text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-16\text{V}, V_{GS}=0\text{V}$			-1	uA
		$V_{DS}=-16\text{V}, V_{GS}=0\text{V}$ $T_J=85^\circ\text{C}$			-5	
On-State Drain Current	$I_{D(\text{on})}$	$V_{DS}\geq 5\text{V}, V_{GS}=4.5\text{V}$	0.7			A
Drain-Source On-Resistance	$R_{DS(\text{on})}$	$V_{GS}=-4.5\text{V}, I_D=-0.6\text{A}$		500	620	mΩ
		$V_{GS}=-2.5\text{V}, I_D=-0.5\text{A}$		700	860	
		$V_{GS}=-1.8\text{V}, I_D=-0.4\text{A}$		1000	1450	
Forward Transconductance	g_{FS}	$V_{DS}=-10\text{V}, I_D=-0.4\text{A}$		1		S
Diode Forward Voltage	V_{SD}	$I_S=-0.15\text{A}, V_{GS}=0\text{V}$		0.65	1.2	V
Dynamic						
Input Capacitance	C_{iss}	$V_{DS}=-10\text{V}, V_{GS}=0\text{V}$ $f=1\text{MHz}$		70	100	pF
Output Capacitance	C_{oss}			20		
Reverse Transfer Capacitance	C_{rss}			10		
Total Gate Charge	Q_g	$V_{DS}=-10\text{V}, V_{GS}=-4.5\text{V}$ $I_D=-0.25\text{A}$		1.0	1.3	nC
Gate-Source Charge	Q_{gs}			0.1		
Gate-Drain Charge	Q_{gd}			0.3		
Turn-On Time	$t_{d(on)}$	$V_{DD}=-10\text{V}, R_L=30\Omega$ $I_D=-0.2\text{A}, V_{GEN}=-4.5\text{V}$ $R_G=10\Omega$		10	15	ns
	t_r			10	15	
Turn-Off Time	$t_{d(off)}$			40	60	
	t_f			30	50	



Typical Characteristics

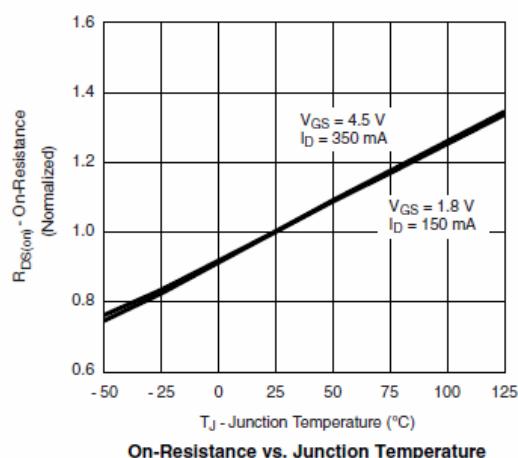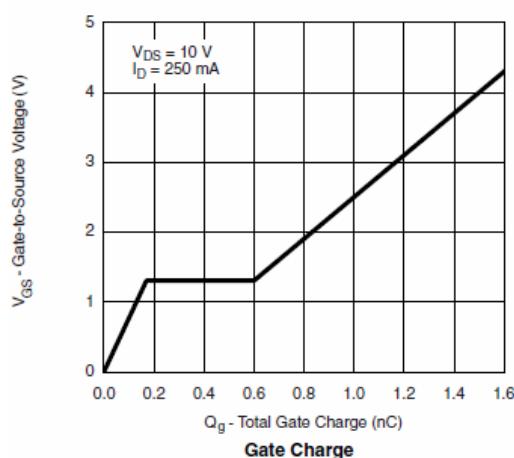
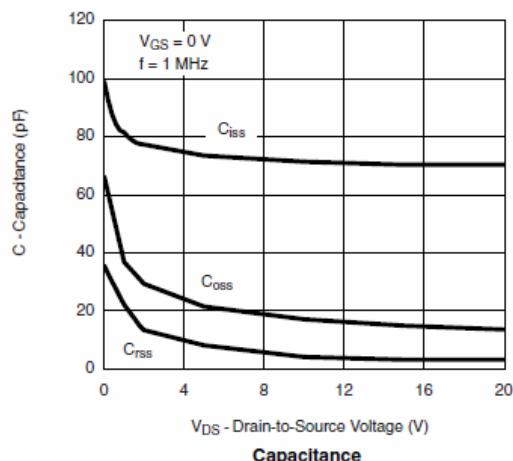
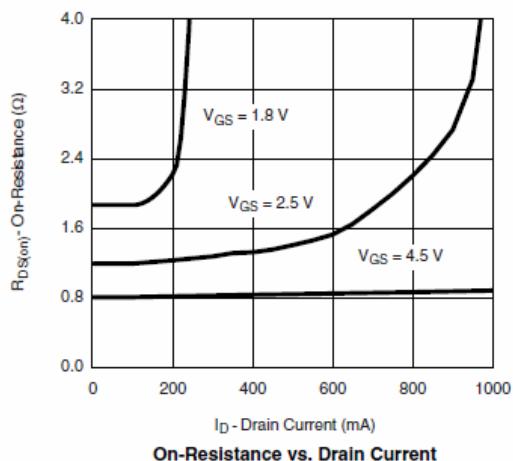
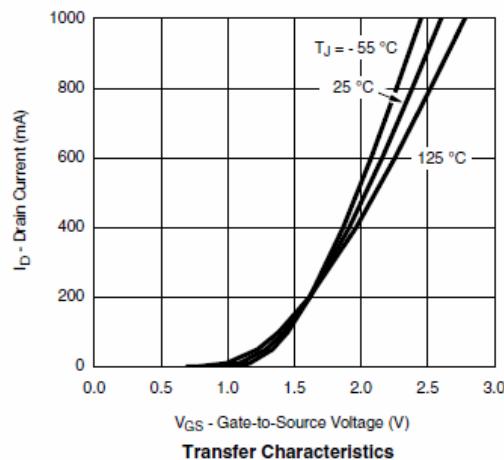
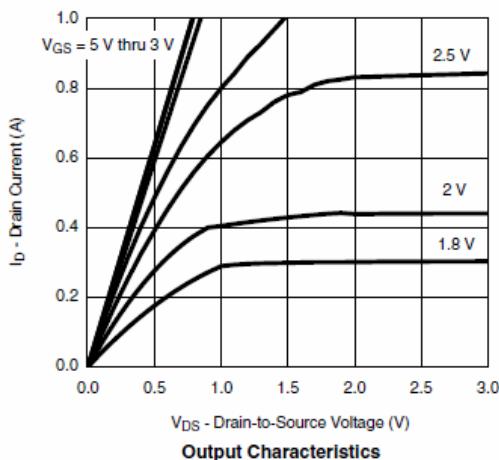




**Alfa-MOS
Technology**

**AFP1073
20V P-Channel
Enhancement Mode MOSFET**

Typical Characteristics

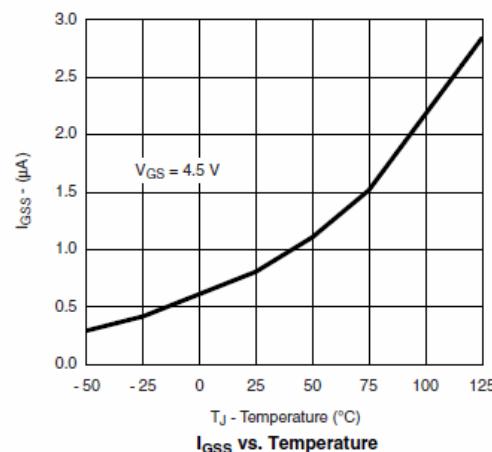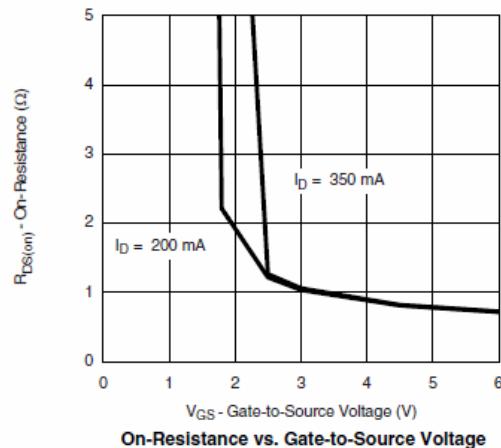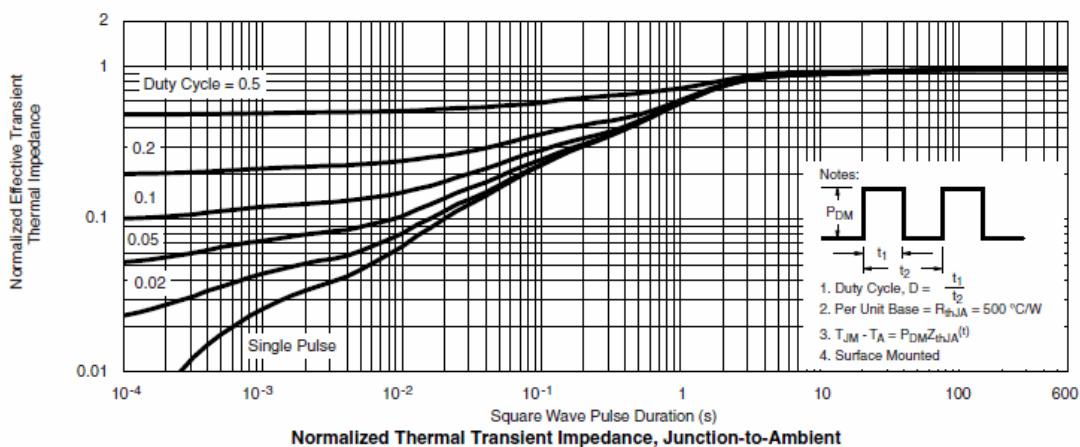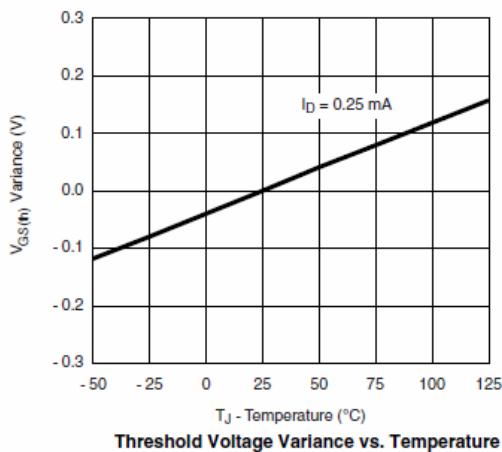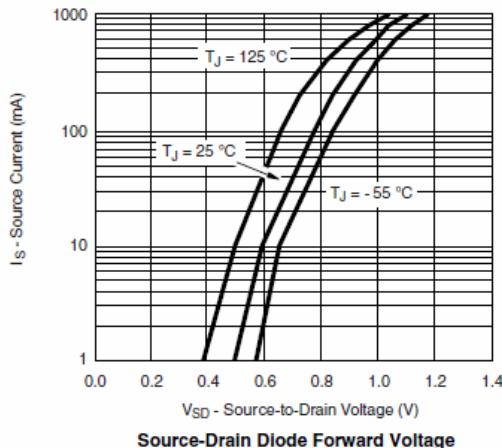





**Alfa-MOS
Technology**



**AFP1073
20V P-Channel
Enhancement Mode MOSFET**

Typical Characteristics



Gate Charge Test Circuit & Waveform

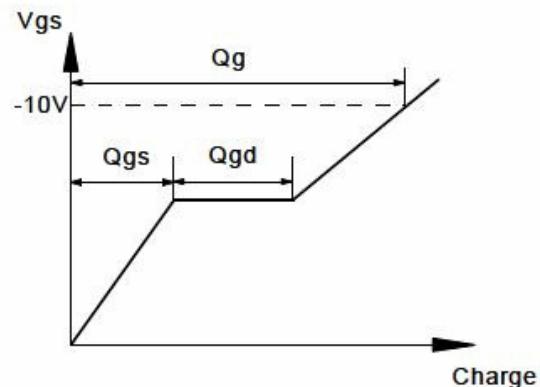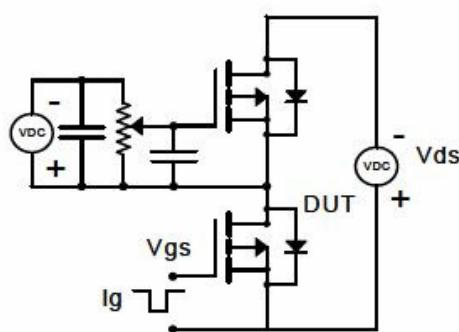

Resistive Switching Test Circuit & Waveforms

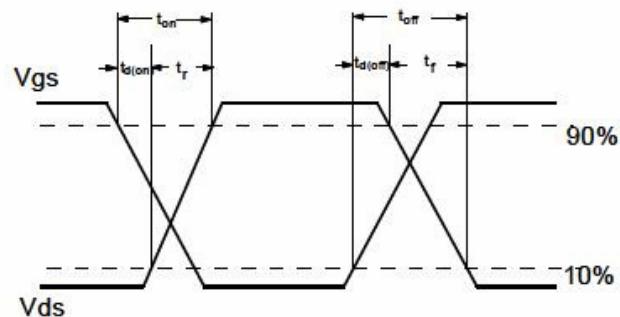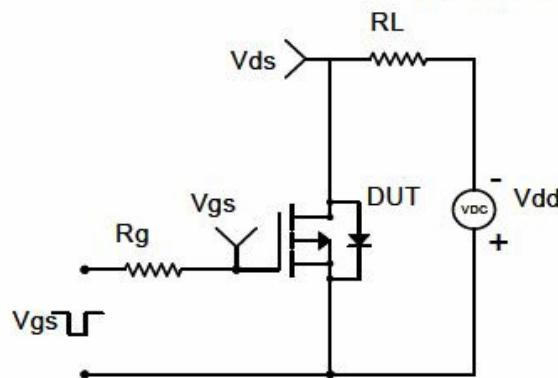


Diode Recovery Test Circuit & Waveforms

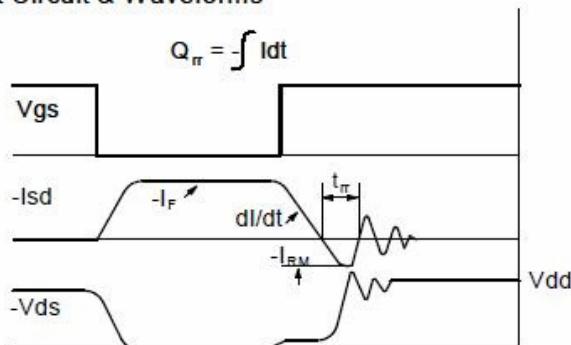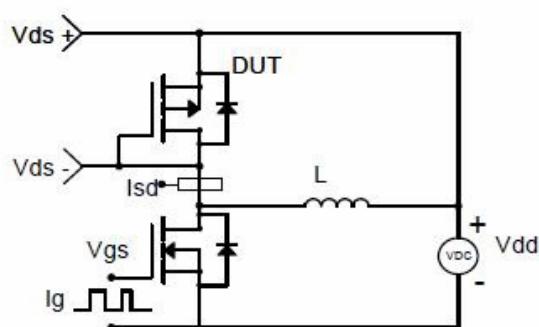



Package Information (SOT-723)

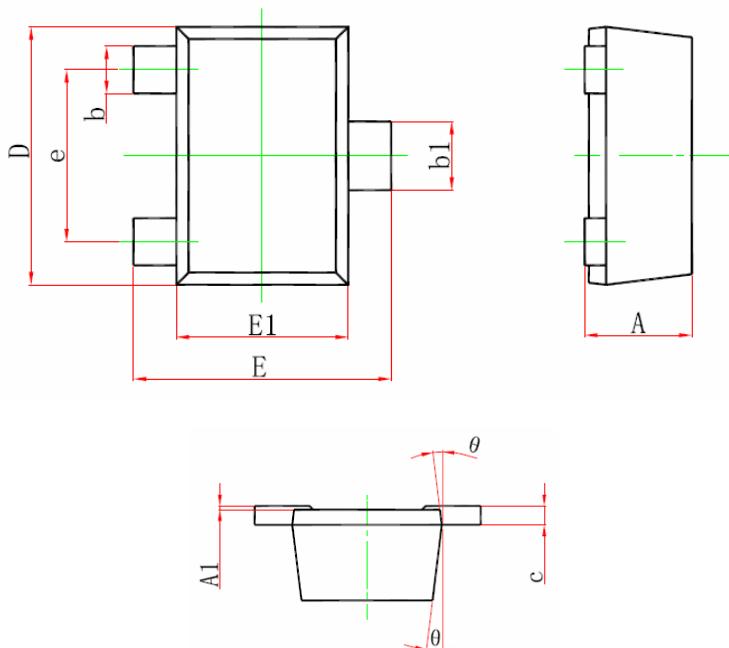

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A		0.500		0.020
A1	0.000	0.050	0.000	0.002
b	0.170	0.270	0.007	0.011
b1	0.270	0.370	0.011	0.015
c		0.150		0.006
D	1.150	1.250	0.045	0.049
E	1.150	1.250	0.045	0.049
E1	0.750	0.850	0.030	0.033
e	0.800TYP.		0.031TYP.	
θ	7° REF.		7° REF.	

©2010 Alfa-MOS Technology Corp.
5F-1, No.28, Lane 123, Sec. 6, Min Chuan E. Rd., Nei-Hu Dist., Taipei, 114, Taiwan
Tel : 886 2) 8791 0162
Fax : 886 2) 8791 7482
©<http://www.alfa-mos.com>