



**SPECIFICATION  
FOR  
TFT MODULE**

**MODULE NO: AFS240320TG-2.0-Y110001  
REVISION NO: 01**

Customer's Approval:

--

	SIGNATURE	DATE
PREPARED BY (RD ENGINEER)		
CHECKED BY		
APPROVED BY		

## **DOCUMENT REVISION HISTORY**

<b>Version</b>	<b>DATE</b>	<b>DESCRIPTION</b>	<b>CHANGED BY</b>
00	Apr-18-2011	First Issue	lhm
01	Oct-12-2011	Rev. BL	Alfred


## **CONTENTS**

<b>1. Features &amp; Mechanical specifications</b>	<b>1</b>
<b>2. Dimensional Outline</b>	<b>2</b>
<b>3. Block Diagram</b>	<b>3</b>
<b>4. Pin Description</b>	<b>4</b>
<b>5. Absolute Maximum Ratings</b>	<b>5</b>
<b>6. Electrical Characteristics</b>	<b>5</b>
<b>7. Electro-Optical Characteristics</b>	<b>5</b>
<b>8. Instruction Description</b>	<b>6</b>
<b>9 AC Characteristics</b>	<b>8</b>
<b>10. Quality Specification</b>	<b>10</b>
<b>11. Quality Specification</b>	<b>11</b>

## 1. Features & Mechanical Specifications

Item	Contents	Unit
	LCD	
LCD Type	TFT / Transmissive / Normally White	--
Viewing direction	12:00	--
Interface	8080 -16bit parallel bus interface	--
Driver IC	HX8347-D	--
Outline Dimension	37.68 ×51.3×2.55	mm
Glass area (W×H×T)	34.0 ×44.55 /48.38 × 0.5	mm
Active area (W×H)	30.6 × 40.8	mm
Number of Dots	240(RGB) × 320	--
Dot pitch (W×H)	0.0425 × 0.1275	mm
Pixel pitch (W×H)	0.1275 ×0.1275	mm
Operating Temperature	-20 ~ +70	°C
Storage temperature	-30 ~ +80	°C

## 2. Dimensional Outline

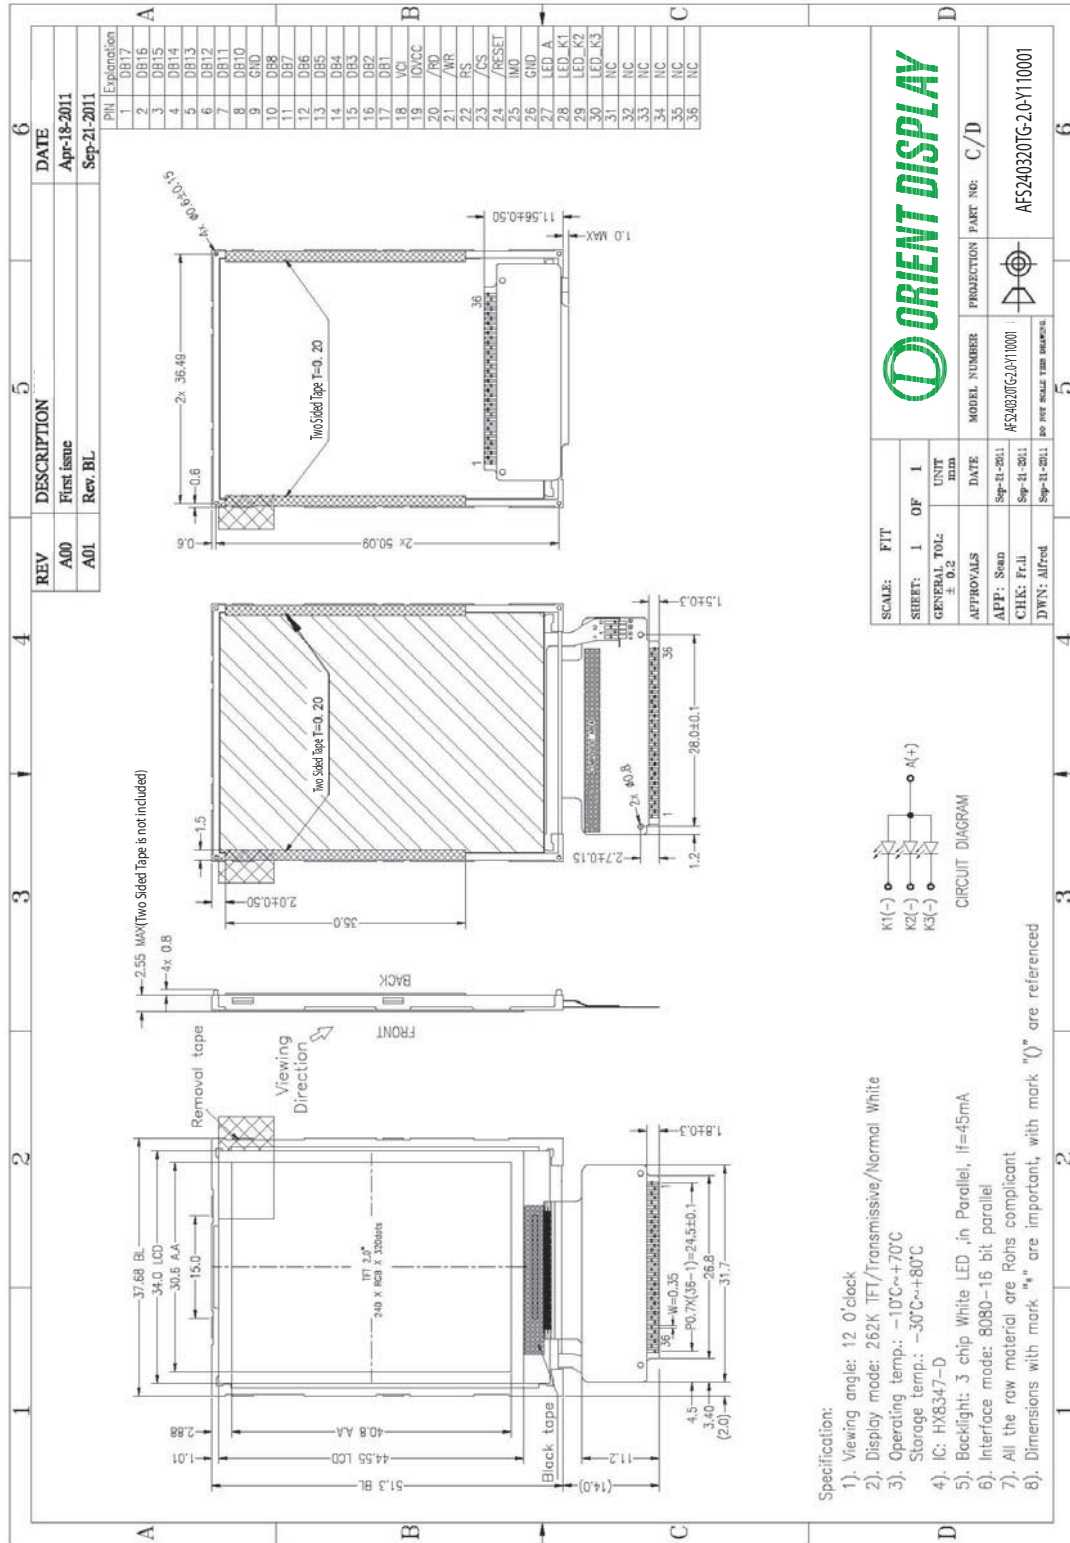

- Specification:
- 1). Viewing angle: 12 0'clock
  - 2). Display mode: 262K TFT/Transmissive/Normal White
  - 3). Operating temp.: -10°C~+70°C
  - 4). Storage temp.: -30°C~+80°C
  - 5). IC: HX8347-D
  - 6). Backlight: 3 chip White LED, in Parallel, If=45mA
  - 7). Interface mode: 8080-16 bit parallel
  - 8). All the raw material are RoHS compliant
  - 9). Dimensions with mark "\*" are important, with mark "()" are referenced

Figure 1. Dimensional outline

## 2. Block Diagram

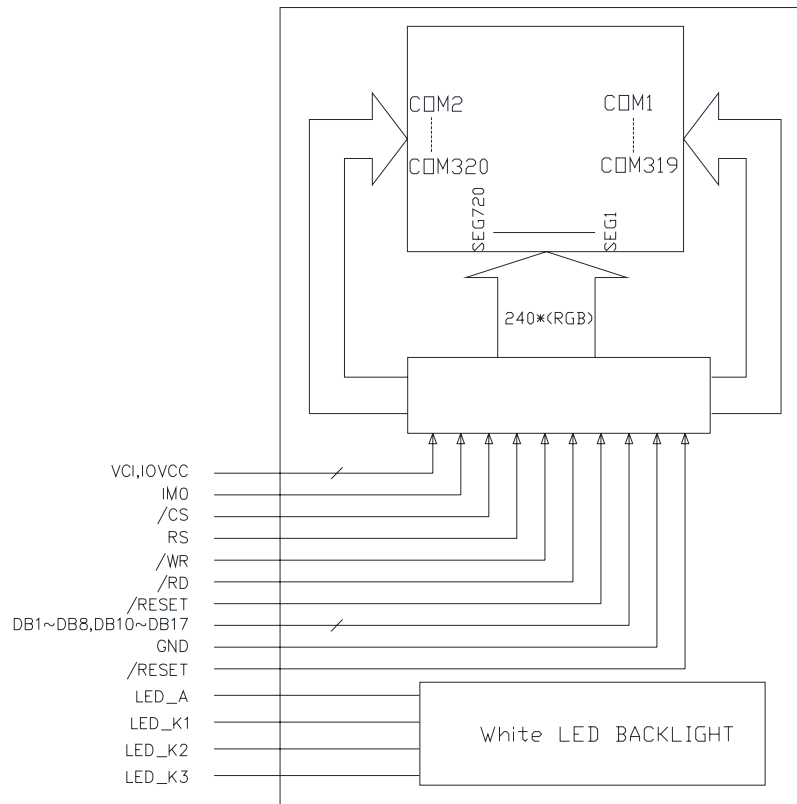


Figure 2. Block diagram

## 4. Pin Description

PIN No.	SYMBOL	Function
1~8	DB17~DB10	Data Bus
9	GND	System Ground
10~17	DB8~DB1	Data Bus
18	VCI	Supply voltage to the analog circuit
19	IOVCC	Supply voltage to the interface pins
20	/RD	Read signal input pin. (Active Low)
21	/WR	Write signal input pin. (Active Low)
22	RS	Register select signal. Low: select an index or status register High: select a control register
23	/CS	Chip select signal. (Active Low)
24	/RESET	Reset Signal pin ("Low" is enable)
25	IM0	System interface select Pin.
26	GND	System Ground
27	LED_A	Backlight LED Anode.
28	LED_K1	Backlight LED1 Cathode.
29	LED_K2	Backlight LED2 Cathode.
30	LED_K3	Backlight LED3 Cathode.
31~36	NC	No Connection

**note:**

R1	R2	Interface Mode
Short	Open	8080-16bit interface : DB[17:10], DB[8:1] (default)
Open	Short	8080-8bit interface : DB[17:10]

1. Unused pins must be fixed GND level.
2. R1~R2 are SMT components on the TFT Module FPC.

## **5. Absolute Maximum Ratings**

Item	Symbol	Rating	Unit
Supply Voltage range	VCI	-0.3 to +4.6	V
I/O supply voltage range	IOVCC	-0.3 to +4.6	V
Operating Temperature range	TOP	-20 to +70	°C
Storage Temperature range	TST	-30 to +80	°C

## **6. Electrical Characteristics**

### **DC Characteristics**

Item	Symbol	Min.	Type.	Max.	Unit
Logic Supply Voltage	VCI	2.3	2.8	3.3	V
Interface operation voltage	IOVCC	1.65	1.8	3.3	V

## **7. Backlight Characteristics**

White LED × 3 in parallel

(Ta = 25°C)

Item	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	VF	IF=45mA	-	3.2	-	V
Uniformity	ΔBp	-	80	-	-	%
Luminance for LCD	Lv	IF=45mA	2800	3500	-	cd/m <sup>2</sup>



## 8. Electro-Optical Characteristics


(Note1・Note2)

(Using CPT LC+ EWV Polarizer+Corresponding Backlight, reference only)

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	REMARK	
Transmittance	T		5.1	5.7		%		
Contrast Ratio	CR	*1)	300	450	--	--	Note 3	
Response Time	Tr+ Tf	*3)	--	25	35	ms	Note 4	
Viewing Angle	Vertical	$\theta$ *2)	CR $\geq$ 10	--	55	--		
				--	65	--	Note 5	
	Horizontal			$\phi$ *2)	--	65	--	
					--	65	--	
Color Filter Chromaticity	White	x y Y	$\theta = \phi = 0^\circ$	(0.290)	(0.310)	(0.330)		
				(0.325)	(0.345)	(0.365)		
				(29.0)	(32.0)	(35.0)		
	Red	x y Y	$\theta = \phi = 0^\circ$	(0.635)	(0.655)	(0.675)		
				(0.312)	(0.332)	(0.352)		
				(15.2)	(18.2)	(21.2)		
	Green	x y Y	$\theta = \phi = 0^\circ$	(0.301)	(0.321)	(0.341)		
				(0.550)	(0.570)	(0.590)		
				(58.1)	(62.1)	(66.1)		
	Blue	x y Y	$\theta = \phi = 0^\circ$	(0.114)	(0.134)	(0.154)		
				(0.117)	(0.137)	(0.157)		
				(12.6)	(15.6)	(18.6)		
	NTSC			(50%)	(56%)	-		

Note 1. Ambient condition :  $25^\circ\text{C} \pm 2^\circ\text{C}$  ,  $60 \pm 10\% \text{RH}$  , under 10 Lux in the darkroom .


Note 2. Measure device : BM-5A (TOPCON) , viewing cone=  $1^\circ$  ,  $I_L=20\text{mA}$  .

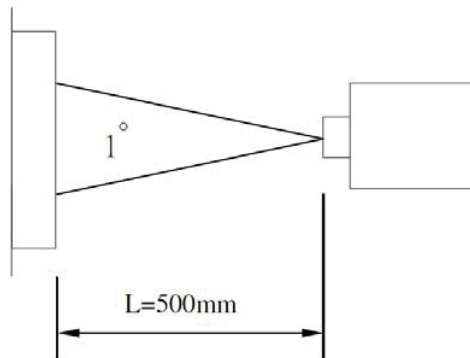


Note 3. Definition of Contrast Ratio :

$$\text{CR} = \text{White Luminance (ON)} / \text{Black Luminance (OFF)}$$

Note 4. Definition of response time : The response time is defined as the time interval between the 10% and 90% amplitudes.

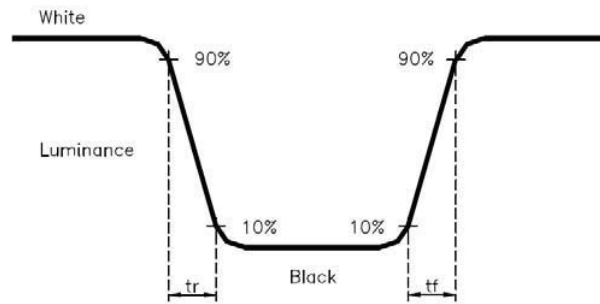

Note 5. Definition of view angle( $\theta$  ,  $\psi$ ) :

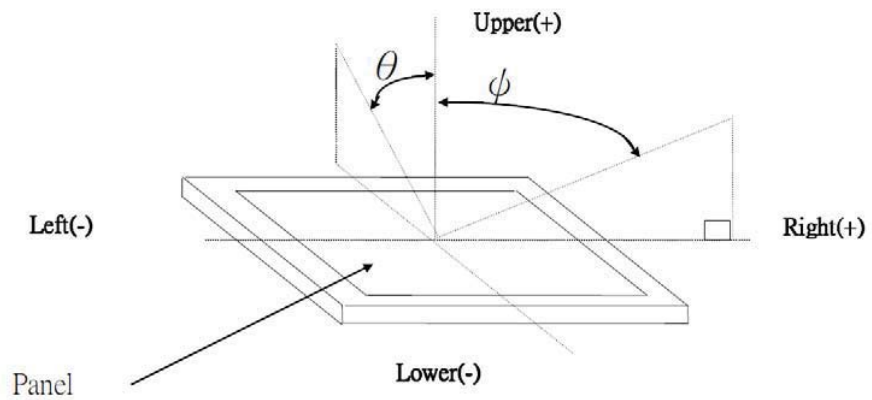


Note 6. Light source: C light.

## 9. Instruction Description

Register No.	Register	W/R	Upper Code	Lower Code								Comment	
			D[17:8]	D7	D6	D5	D4	D3	D2	D1	D0		
R00h	Himax ID	R	-	0	1	0	0	0	1	1	1		
R01h	Display Mode control	W/R	-	DP_S TB(0)	DP_S TB_S(0)	-	-	SCROL (0)	IDMON (0)	INVON (0)	PTLON (0)		
R02h	Column address start 2	W/R	-	SC[15:8] (8'b0000_0000)									
R03h	Column address start 1	W/R	-	SC[7:0] (8'b0000_0000)									
R04h	Column address end 2	W/R	-	EC[15:8] (8'b0000_0000)									
R05h	Column address end 1	W/R	-	EC[7:0] (8'b1110_1111)									
R06h	Row address start 2	W/R	-	SP[15:8] (8'b0000_0000)									
R07h	Row address start 1	W/R	-	SP[7:0] (8'b0000_0000)									
R08h	Row address end 2	W/R	-	EP[15:8] (8'b0000_0001)									
R09h	Row address end 1	W/R	-	EP[7:0] (8'b0011_1111)									
R0Ah	Partial area start row 2	W/R	-	PSL[15:8] (8'b0000_0000)									
R0Bh	Partial area start row 1	W/R	-	PSL[7:0] (8'b0000_0000)									
R0Ch	Partial area end row 2	W/R	-	PEL[15:8] (8'b0000_0001)									
R0Dh	Partial area end row 1	W/R	-	PEL[7:0] (8'b0011_1111)									
R0Eh	Vertical Scroll Top fixed area 2	W/R	-	TFA[15:8] (8'b0000_0000)									
R0Fh	Vertical Scroll Top fixed area 1	W/R	-	TFA[7:0] (8'b0000_0000)									
R10h	Vertical Scroll height area 2	W/R	-	VSA[15:8] (8'b0000_0001)									
R11h	Vertical Scroll height area 1	W/R	-	VSA[7:0] (8'b0100_0000)									
R12h	Vertical Scroll Button area 2	W/R	-	BFA[15:8] (8'b0000_0000)									
R13h	Vertical Scroll Button area 1	W/R	-	BFA [7:0] (8'b0000_0000)									
R14h	Vertical Scroll Start address 2	W/R	-	VSP [15:8] (8'b0000_0000)									
R15h	Vertical Scroll Start address 1	W/R	-	VSP [7:0] (8'b0000_0000)									
R16h	Memory Access control	W/R	-	MY(0)	MX(0)	MV(0)	-	BGR(0)	-	-	-		
R17h	COLMOD	W/R	-	CSEL[3:0] (4b'0110)				-	IFPF[2:0] (3b'110)				
R18h	OSC Control 2	W/R	-	I/PI_RADJ1[3:0] (3b'0011)				N/P_RADJ0[3:0] (4b'0100)				*	
R19h	OSC Control 1	W/R	-	-	-	-	-	-	-	-	OSC_EN(0)		
R1Ah	Power Control 1	W/R	-	-	-	-	-	-	BT[2:0] (001)				
R1Bh	Power Control 2	W/R	-	VRH[5:0] (01_1011)_4.8V									
R1Ch	Power Control 3	W/R	-	-	-	-	-	-	AP[2:0] (011)				
R1Dh	Power Control 4	W/R	-	I/PI_FS0[2:0] (100)				-	N/P_FS0[2:0] (100)				
R1Eh	Power Control 5	W/R	-	I/PI_FS1[2:0] (100)				-	N/P_FS1[2:0] (100)				
R1Fh	Power Control 6	W/R	-	GASEN(1)	VCOMG(0)	-	PON(0)	DK(1)	XDK(0)	DDVDH_TRI(0)	STB(1)		
R22h	SRAM Write Control	W/R	SRAM Write										
R23h	VCOM Control 1	W/R	-	VMF[7:0] (1000_0000)									
R24h	VCOM Control 2	W/R	-	VMH[7:0] (0010_1111)									
R25h	VCOM Control 3	W/R	-	VML[7:0] (0101_0111)									
R26h	Display Control 1	W/R	-	--	-	-	-	ISC[3:0] (0011)					
R27h	Display Control 2	W/R	-	PT[1:0] (10)		PTV[1:0] (01)		-	-	PTG(1)	REF(1)		

Register No.	Register	W/R	Upper Code	Lower Code								Comment
			D[17:8]	D7	D6	D5	D4	D3	D2	D1	D0	
R28h	Display Control 3	W/R	-	-	-	GON(1)	DTE(0)	D[1:0](00)		-	-	
R29h	Frame Rate control 1	W/R	-	I/PI_RTN[3:0](0010)				N/P_RTN[3:0](0010)				
R2Ah	Frame Rate Control 2	W/R	-	-	-	I/PI_DIV[1:0](00)		-	-	N/P_DIV[1:0](00)		
R2Bh	Frame Rate Control 3	W/R	-	N/P_DUM[7:0](8b'0001_1100)								
R2Ch	Frame Rate Control 4	W/R	-	I/PI_DUM[7:0](8b'0001_1100)								
R2Dh	Cycle Control 1	W/R	-	GDON[7:0](8'b0000_1101)								
R2Eh	Cycle Control 2	W/R	-	GDOF[7:0](8'b0111_0000)								
R2Fh	Display inversion	W/R	-	-	I/PI_NW[2:0](3b'001)			-	N/P_NW[2:0](3b'001)			
R31h	RGB interface control 1	W/R	-	-	-	-	-	-	-	RCM[1:0](00)		
R32h	RGB interface control 2	W/R	-	-	-	-	-	DPL(0)	HSPL(0)	V SPL(0)	EPL(0)	
R33h	RGB interface control 3	W/R	-	HBP[7:0]								
R34h	RGB interface control 4	W/R	-	HBP[9:8]			VBP[5:0]					
R36h	Panel Characteristic	W/R	-	-	-	-	-	SS_Panel	GS_Panel	REV_Panel	BGR_Panel	
R38h	OTP Control 1	W/R	-	OTP_PTM[1:0]		OTP_VARDJ[1:0]		OTP_POR	OTP_OTPEN	OTP_PP ROG	OTP_PWE	
R39h	OTP Control 2	W/R	-	-	-	-	-	OTP_YA2	OTP_YA1	OTP_YA0		
R3Ah	OTP Control 3	W/R	-	-	-	-	OTP_XA4	OTP_XA3	OTP_XA2	OTP_XA1	OTP_XA0	
R3Bh	OTP Control 4	R	-	OTP_READ[7:0]								
R3Ch	CABC Control 1	W/R	-	DBV[7:0](8'h00)								
R3Dh	CABC Control 2	W/R	-	-	-	BCTRL(0)	-	DD(0)	BL(0)	-	-	
R3Eh	CABC Control 3	W/R	-	-	-	-	-	-	-	C1(0)	C0(0)	
R3Fh	CABC Control 4	W/R	-	CMB[7:0](8'h00)								
R40h	r1 Control (1)	W/R	-	-	-	-	-	VRP0[5:0](6'b00_0001)				
R41h	r1 Control (2)	W/R	-	-	-	-	-	VRP1[5:0](6'b00_1110)				
R42h	r1 Control (3)	W/R	-	-	-	-	-	VRP2[5:0](6'b01_0001)				
R43h	r1 Control (4)	W/R	-	-	-	-	-	VRP3[5:0](6'b01_1010)				
R44h	r1 Control (5)	W/R	-	-	-	-	-	VRP4[5:0](6'b01_1000)				
R45h	r1 Control (6)	W/R	-	-	-	-	-	VRP5[5:0](6'b10_0100)				
R46h	r1 Control (7)	W/R	-	-	-	-	-	PRP0[6:0](7'b001_0101)				
R47h	r1 Control (8)	W/R	-	-	-	-	-	PRP1[6:0](7'b110_0101)				
R48h	r1 Control (9)	W/R	-	-	-	-	-	PKP0[4:0](5'b0_1011)				
R49h	r1 Control (10)	W/R	-	-	-	-	-	PKP1[4:0](5'b1_100)				
R4Ah	r1 Control (11)	W/R	-	-	-	-	-	PKP2[4:0](5'b1_1001)				
R4Bh	r1 Control (12)	W/R	-	-	-	-	-	PKP3[4:0](5'b1_1010)				
R4Ch	r1 Control (13)	W/R	-	-	-	-	-	PKP4[4:0](5'b1_1000)				
R50h	r1 Control (18)	W/R	-	-	-	-	-	VRN0[5:0](6'b01_1011)				
R51h	r1 Control (19)	W/R	-	-	-	-	-	VRN1[5:0](6'b10_0111)				
R52h	r1 Control (20)	W/R	-	-	-	-	-	VRN2[5:0](6'b10_0101)				
R53h	r1 Control (21)	W/R	-	-	-	-	-	VRN3[5:0](6'b10_1110)				
R54h	r1 Control (22)	W/R	-	-	-	-	-	VRN4[5:0](6'b11_0001)				
R55h	r1 Control (23)	W/R	-	-	-	-	-	VRN5[5:0](6'b11_1110)				
R56h	r1 Control (24)	W/R	-	-	-	-	-	PRN0[6:0](7'b001_1010)				
R57h	r1 Control (25)	W/R	-	-	-	-	-	PRN1[6:0](7'b110_1010)				
R58h	r1 Control (26)	W/R	-	-	-	-	-	PKN0[4:0](5'b0_0111)				
R59h	r1 Control (27)	W/R	-	-	-	-	-	PKN1[4:0](5'b0_0101)				
R5Ah	r1 Control (28)	W/R	-	-	-	-	-	PKN2[4:0](5'b0_0110)				
R5Bh	r1 Control (29)	W/R	-	-	-	-	-	PKN3[4:0](5'b0_1011)				
R5Ch	r1 Control (30)	W/R	-	-	-	-	-	PKN4[4:0](5'b1_0100)				
R5Dh	r1 Control (35)	W/R	-	CGMN1[1:0](11)		CGMN0[1:0](00)		CGMP1[1:0](11)		CGMP0[1:0](00)		
R60h	TE Control	W/R	-	-	-	-	TE_m ode(0)	TEOE(0)	-	-		

## 10. AC Characteristics

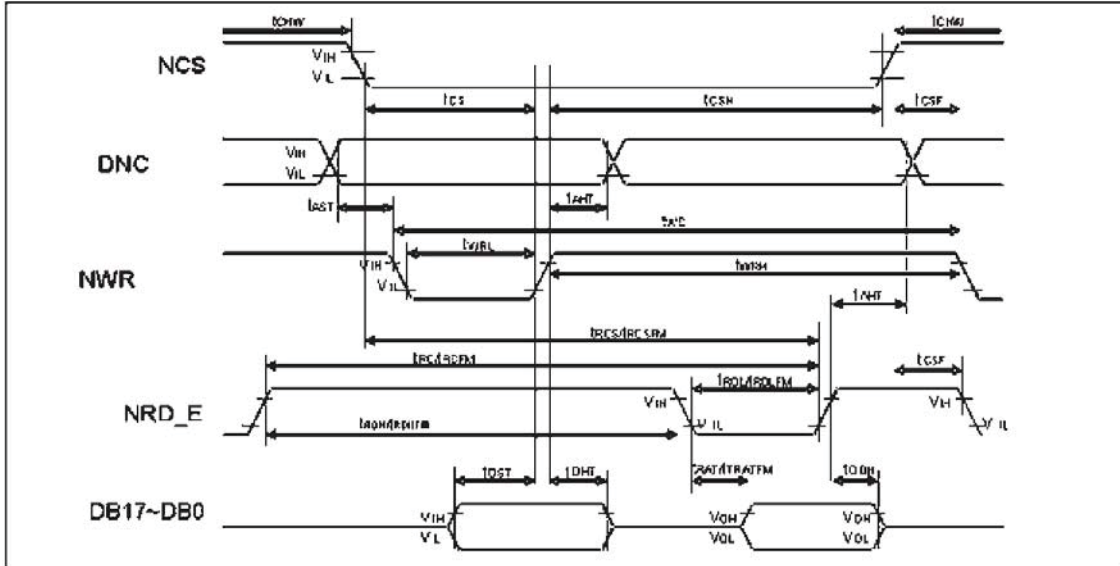

Parallel Interface Characteristics (8080-Series MPU)


(VSSA=0V, IOVCC=1.65V to 3.3V, VCI=2.5V to 3.3V, Ta = -30 to 70° C)

Signal	Symbol	Parameter	Min.	Max.	Unit	Description
DNC_SCL	tAST	Address setup time	0		ns	-
	tAHT	Address hold time (Write/Read)	10		ns	-
NCS	tCHW	Chip select "H" pulse width	0	-		
	tCS	Chip select setup time (Write)	15	-		
	trCS	Chip select setup time (read ID)	45	-		
	trCSFM	Chip select setup time (Read FM)	355	-	ns	-
	tCSF	Chip select wait time (Write/Read)	10	-		
	tCSH	Chip select hold time	10	-		
NWR_SCL	tWC	Write cycle	66	-		
	tWRH	Control pulse "H" duration	15	-	ns	-
	tWRL	Control pulse "L" duration	15	-		
NRD(ID)	trC	Read cycle (ID)	160	-		
	trDH	Control pulse "H" duration (ID)	90	-	ns	When read ID data
	trDL	Control pulse "L" duration (ID)	45	-		
NRD(FM)	trCFM	Read cycle (FM)	450	-		
	trDHEM	Control pulse "H" duration (FM)	90	-	ns	When read from frame memory
	trDLFM	Control pulse "L" duration (FM)	355	-		
DB17 to DB0	tDST	Data setup time	10	-		
	tDHT	Data hold time	10	-		
	trAT	Read access time (ID)	-	40	ns	For maximum CL=30pF
	trATFM	Read access time (FM)	-	340		For minimum CL=8pF
	tODH	Output disable time	20	80		


Note: The input signal rise time and fall time (tr, tf) is specified at 15 ns or less.

Logic high and low levels are specified as 30% and 70% of IOVCC for Input signals.

Input Signal Slope



Output Signal Slope



## 11. Quality Specifications


All The raw material are Rohs compliant.

### 11.1 Standard of the product appearance test


Manner of appearance test: The inspection should be performed in using 20W x 2 fluorescent lamps.

Distance between LCM and fluorescent lamps should be 100 cm or more. Distance between LCM and inspector eyes should be 30 cm or more.

Viewing direction for inspection is  $45^\circ$  from vertical against LCM.

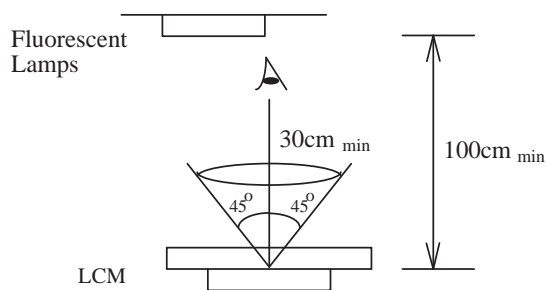

Definition of zone:



A Zone: viewing area

B Zone: outside viewing area

## 11.2 Specification of quality assurance



AQL inspection standard

Sampling method: MIL-STD-105E, Level II, single sampling






**Defect classification (Note: \* is not including)**



Classify	Item		Note	AQL
Major	Display state	Short or open circuit	1	0.65
		LC leakage		
		Flickering		
		No display		
		Wrong viewing direction		
		Contrast defect (dim, ghost)	2	
	Back-light	1,8		
	Non-display	Flat cable or pin reverse	10	
Wrong or missing component		11		
Minor	Display state	Background color deviation	2	1.0
		Black spot and dust	3	
		Line defect, Scratch	4	
		Rainbow	5	
		Chip	6	
		Pin hole	7	
		Polarizer	Protruded	
	Bubble and foreign material		3	
	Soldering	Poor connection	9	
	Wire	Poor connection	10	
	TAB	Position, Bonding strength	13	




**Note on defect classification**

No.	Item	Criterion																				
1	Short or open circuit	Not allow																				
	LC leakage																					
	Flickering																					
	No display																					
	Wrong viewing direction																					
	Wrong Back-light																					
2	Contrast defect	Refer to approval sample																				
	Background color deviation																					
3	Point defect, Black spot, dust (including Polarizer)  $\varnothing = (X+Y)/2$	 <table border="1" data-bbox="901 903 1295 1171"> <thead> <tr> <th>Point Size</th> <th>Acceptable Qty.</th> </tr> </thead> <tbody> <tr> <td><math>\varnothing \leq 0.10</math></td> <td>Disregard</td> </tr> <tr> <td><math>0.10 &lt; \varnothing \leq 0.20</math></td> <td>3</td> </tr> <tr> <td><math>0.20 &lt; \varnothing \leq 0.25</math></td> <td>2</td> </tr> <tr> <td><math>0.25 &lt; \varnothing \leq 0.30</math></td> <td>1</td> </tr> <tr> <td><math>\varnothing &gt; 0.30</math></td> <td>0</td> </tr> </tbody> </table> <p>Unit: mm</p>	Point Size	Acceptable Qty.	$\varnothing \leq 0.10$	Disregard	$0.10 < \varnothing \leq 0.20$	3	$0.20 < \varnothing \leq 0.25$	2	$0.25 < \varnothing \leq 0.30$	1	$\varnothing > 0.30$	0								
Point Size	Acceptable Qty.																					
$\varnothing \leq 0.10$	Disregard																					
$0.10 < \varnothing \leq 0.20$	3																					
$0.20 < \varnothing \leq 0.25$	2																					
$0.25 < \varnothing \leq 0.30$	1																					
$\varnothing > 0.30$	0																					
4	Line defect, Scratch	 <table border="1" data-bbox="812 1333 1307 1591"> <thead> <tr> <th colspan="2">Line</th> <th>Acceptable Qty.</th> </tr> <tr> <th>L</th> <th>W</th> <th></th> </tr> </thead> <tbody> <tr> <td>---</td> <td><math>0.02 \geq W</math></td> <td>Disregard</td> </tr> <tr> <td><math>4.0 \geq L</math></td> <td><math>0.03 \geq W &gt; 0.02</math></td> <td rowspan="2">2</td> </tr> <tr> <td><math>2.0 \geq L</math></td> <td><math>0.05 \geq W &gt; 0.03</math></td> </tr> <tr> <td><math>1.0 \geq L</math></td> <td><math>0.1 &gt; W &gt; 0.05</math></td> <td>1</td> </tr> <tr> <td>---</td> <td><math>0.1 \varnothing W</math></td> <td>Applied as point defect</td> </tr> </tbody> </table> <p>Unit: mm</p>	Line		Acceptable Qty.	L	W		---	$0.02 \geq W$	Disregard	$4.0 \geq L$	$0.03 \geq W > 0.02$	2	$2.0 \geq L$	$0.05 \geq W > 0.03$	$1.0 \geq L$	$0.1 > W > 0.05$	1	---	$0.1 \varnothing W$	Applied as point defect
Line		Acceptable Qty.																				
L	W																					
---	$0.02 \geq W$	Disregard																				
$4.0 \geq L$	$0.03 \geq W > 0.02$	2																				
$2.0 \geq L$	$0.05 \geq W > 0.03$																					
$1.0 \geq L$	$0.1 > W > 0.05$	1																				
---	$0.1 \varnothing W$	Applied as point defect																				
5	Rainbow	Not more than two color changes across the viewing area.																				

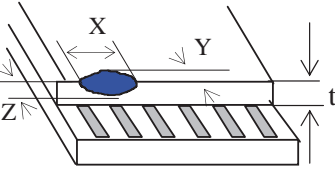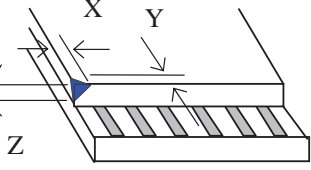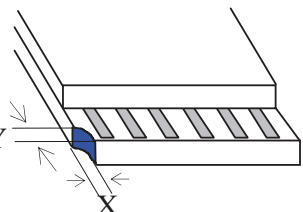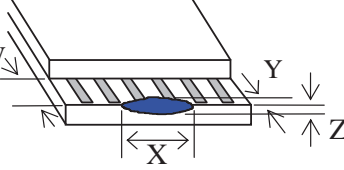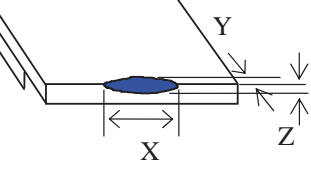

No	Item	Criterion																																	
6	<p>Chip</p> <p>Remark:  X: Length direction  Y: Short direction  Z: Thickness direction  t: Glass thickness  W: Terminal Width</p>	 <p>Acceptable criterion</p> <table border="1" data-bbox="966 436 1318 510"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><math>\leq 2</math></td> <td>0.5mm</td> <td><math>\leq t/2</math></td> </tr> </tbody> </table>  <p>Acceptable criterion</p> <table border="1" data-bbox="954 720 1318 793"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><math>\leq 2</math></td> <td>0.5mm</td> <td><math>\leq t</math></td> </tr> </tbody> </table>  <p>Acceptable criterion</p> <table border="1" data-bbox="971 987 1318 1092"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><math>\leq 3</math></td> <td><math>\leq 2</math></td> <td><math>\leq t</math></td> </tr> <tr> <td colspan="2">shall not reach to ITO</td> <td></td> </tr> </tbody> </table>  <p>Acceptable criterion</p> <table border="1" data-bbox="958 1333 1318 1407"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>Disregard</td> <td><math>\leq 0.2</math></td> <td><math>\leq t</math></td> </tr> </tbody> </table>  <p>Acceptable criterion</p> <table border="1" data-bbox="958 1591 1291 1665"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><math>\leq 5</math></td> <td><math>\leq 2</math></td> <td><math>\leq t/3</math></td> </tr> </tbody> </table>	X	Y	Z	$\leq 2$	0.5mm	$\leq t/2$	X	Y	Z	$\leq 2$	0.5mm	$\leq t$	X	Y	Z	$\leq 3$	$\leq 2$	$\leq t$	shall not reach to ITO			X	Y	Z	Disregard	$\leq 0.2$	$\leq t$	X	Y	Z	$\leq 5$	$\leq 2$	$\leq t/3$
X	Y	Z																																	
$\leq 2$	0.5mm	$\leq t/2$																																	
X	Y	Z																																	
$\leq 2$	0.5mm	$\leq t$																																	
X	Y	Z																																	
$\leq 3$	$\leq 2$	$\leq t$																																	
shall not reach to ITO																																			
X	Y	Z																																	
Disregard	$\leq 0.2$	$\leq t$																																	
X	Y	Z																																	
$\leq 5$	$\leq 2$	$\leq t/3$																																	

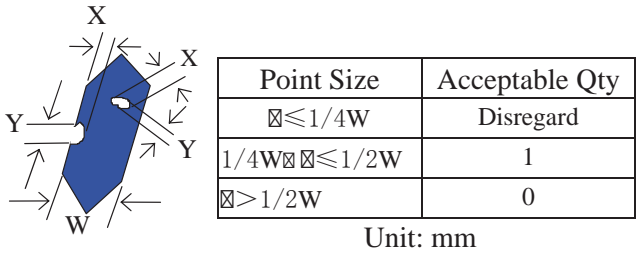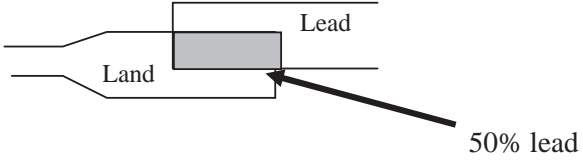No.	Item	Criterion								
7	Segment pattern $W = \text{Segment width}$ $\varnothing = (X+Y)/2$	(1) Pin hole $\varnothing < 0.10\text{mm}$ is acceptable.  <table border="1" data-bbox="894 556 1312 716"> <thead> <tr> <th>Point Size</th> <th>Acceptable Qty</th> </tr> </thead> <tbody> <tr> <td><math>\varnothing \leq 1/4W</math></td> <td>Disregard</td> </tr> <tr> <td><math>1/4W &lt; \varnothing \leq 1/2W</math></td> <td>1</td> </tr> <tr> <td><math>\varnothing &gt; 1/2W</math></td> <td>0</td> </tr> </tbody> </table> <p style="text-align: center;">Unit: mm</p>	Point Size	Acceptable Qty	$\varnothing \leq 1/4W$	Disregard	$1/4W < \varnothing \leq 1/2W$	1	$\varnothing > 1/2W$	0
Point Size	Acceptable Qty									
$\varnothing \leq 1/4W$	Disregard									
$1/4W < \varnothing \leq 1/2W$	1									
$\varnothing > 1/2W$	0									
8	Back-light	(1) The color of backlight should correspond its specification. (2) Not allow flickering								
9	Soldering	(1) Not allow heavy dirty and solder ball on PCB. (The size of dirty refer to point and dust defect) (2) Over 50% of lead should be soldered on Land. 								
10	Wire	(1) Copper wire should not be rusted (2) Not allow crack on copper wire connection. (3) Not allow reversing the position of the flat cable. (4) Not allow exposed copper wire inside the flat cable.								
11*	PCB	(1) Not allow screw rust or damage. (2) Not allow missing or wrong putting of component.								

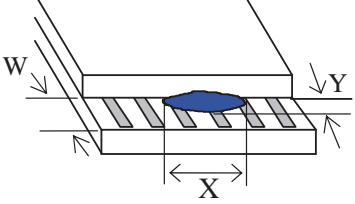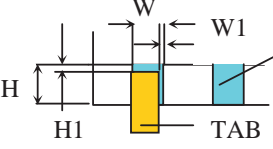No	Item	Criterion
12	Protruded W: Terminal Width	 <p>Acceptable criteria:  <math>Y \leq 0.4</math></p>
13	TAB	<p>1. Position</p>  <div style="border: 1px solid black; padding: 5px; width: fit-content; margin-left: 100px;"> <math>W1 \leq 1/3W</math>  <math>H1 \leq 1/3H</math> </div> <p>2 FPC bonding strength test</p>  <p> <math>P (=F/FPC \text{ bonding width}) \geq 650\text{gf/cm}</math> ,(speed rate: 1mm/min)            5pcs per SOA (shipment)         </p>
14	Total no. of acceptable Defect	<p>A. Zone</p> <p>Maximum 2 minor non-conformities per one unit.            Defect distance: each point to be separated over 10mm</p> <p>B. Zone</p> <p>It is acceptable when it is no trouble for quality and assembly in customer's end product.</p>

### 11.3 Reliability of LCM

Reliability test condition:

Item	Condition	Time (hrs)	Assessment
High temp. Storage	60°C	48	No abnormalities in functions and appearance
High temp. Operating	50°C	48	
Low temp. Storage	-10°C	48	
Low temp. Operating	0°C	48	
Humidity	40°C / 90%RH	48	
Temp. Cycle	-10°C ☒ 25°C ☒ 60°C (60 min ☒ 5 min ☒ 60min)	10cycles	

Recovery time should be 24 hours minimum. Moreover, functions, performance and appearance shall be free from remarkable deterioration within 50,000 hours under ordinary operating and storage conditions room temperature (20±8°C), normal humidity (below 65% RH), and in the area not exposed to direct sun light.

## **11.4 Precaution for using LCD/LCM**

LCD/LCM is assembled and adjusted with a high degree of precision. Do not attempt to make any alteration or modification. The followings should be noted.

### **General Precautions:**

1. LCD panel is made of glass. Avoid excessive mechanical shock or applying strong pressure onto the surface of display area.
2. The polarizer used on the display surface is easily scratched and damaged. Extreme care should be taken when handling. To clean dust or dirt off the display surface, wipe gently with cotton, or other soft material soaked with isopropyl alcohol, ethyl alcohol or trichlorotrifluoroethane, do not use water, ketone or aromatics and never scrub hard.
3. Do not tamper in any way with the tabs on the metal frame.
4. Do not make any modification on the PCB without consulting OD.
5. When mounting a LCM, make sure that the PCB is not under any stress such as bending or twisting. Elastomer contacts are very delicate and missing pixels could result from slight dislocation of any of the elements.
6. Avoid pressing on the metal bezel, otherwise the elastomer connector could be deformed and lose contact, resulting in missing pixels and also cause rainbow on the display.
7. Be careful not to touch or swallow liquid crystal that might leak from a damaged cell. Any liquid crystal adheres to skin or clothes, wash it off immediately with soap and water.

### **Static Electricity Precautions:**

1. CMOS-LSI is used for the module circuit; therefore operators should be grounded whenever he/she comes into contact with the module.
2. Do not touch any of the conductive parts such as the LSI pads; the copper leads on the PCB and the interface terminals with any parts of the human body.
3. Do not touch the connection terminals of the display with bare hand; it will cause disconnection or defective insulation of terminals.
4. The modules should be kept in anti-static bags or other containers resistant to static for storage.
5. Only properly grounded soldering irons should be used.
6. If an electric screwdriver is used, it should be grounded and shielded to prevent sparks.
7. The normal static prevention measures should be observed for work clothes and working benches.
8. Since dry air is inductive to static, a relative humidity of 50-60% is recommended.

**Soldering Precautions:**

1. Soldering should be performed only on the I/O terminals.
2. Use soldering irons with proper grounding and no leakage.
3. Soldering temperature:  $280^{\circ}\text{C} \pm 10^{\circ}\text{C}$
4. Soldering time: 3 to 4 second.
5. Use eutectic solder with resin flux filling.
6. If flux is used, the LCD surface should be protected to avoid spattering flux.
7. Flux residue should be removed.

**Operation Precautions:**

1. The viewing angle can be adjusted by varying the LCD driving voltage  $V_o$ .
2. Since applied DC voltage causes electro-chemical reactions, which deteriorate the display, the applied pulse waveform should be a symmetric waveform such that no DC component remains. Be sure to use the specified operating voltage.
3. Driving voltage should be kept within specified range; excess voltage will shorten display life.
4. Response time increases with decrease in temperature.
5. Display color may be affected at temperatures above its operational range.
6. Keep the temperature within the specified range usage and storage. Excessive temperature and humidity could cause polarization degradation, polarizer peel-off or generate bubbles.
7. For long-term storage over 40°C is required, the relative humidity should be kept below 60%, and avoid direct sunlight.

**Limited Warranty**

OD LCDs and modules are not consumer products, but may be incorporated by OD's customers into consumer products or components thereof, OD does not warrant that its LCDs and components are fit for any such particular purpose.

1. The liability of OD is limited to repair or replacement on the terms set forth below. OD will not be responsible for any subsequent or consequential events or injury or damage to any personnel or user including third party personnel and/or user. Unless otherwise agreed in writing between OD and the customer, OD will only replace or repair any of its LCD which is found defective electrically or visually when inspected in accordance with OD general LCD inspection standard. (Copies available on request)
2. No warranty can be granted if any of the precautions state in handling liquid crystal display above has been disregarded. Broken glass, scratches on polarizer mechanical damages as well as defects that are caused accelerated environment tests are excluded from warranty.
3. In returning the LCD/LCM, they must be properly packaged; there should be detailed description of the failures or defect.