液晶之友 电话：020-33819057
Http://www.lcdfriends.com

AG-320240K

• 320x240 dots 1/240 Duty

FEATURE

1.Construction : STN LCD, Bezel, Heat Seal, Zebra, White CCFL back-light and PCB.
2.Display type : STN ,6 oclock, Negative.
3.Common drivers are LC79430D and Segment drivers are LC79401D.
4.Besides +5V for logic circuit, -20V is needed for LCD driving .
5.Built-in M signal circuit.
6.Extended temperature type.

ELECTRICAL CHARACTERISTICS

ParameterLCD Driving	Symbol	Condition	Typ.Value	Unit.
LCD Driving Voltage	V0-VSS	25°C	21.2	V
Supply Current (Driver)	IDD	VDD=5.0V	5	mA

BUILT-IN CONTROLLER

1	2	3	4	5	6	7	8
FLM	LP	CP	M	VO/Vadj	VDD/Vcc	VSS	VEE
9	10	11	12	13	14		
D0	D1	D2	D3	/DISPOFF	NC		

POWER SUPPLY

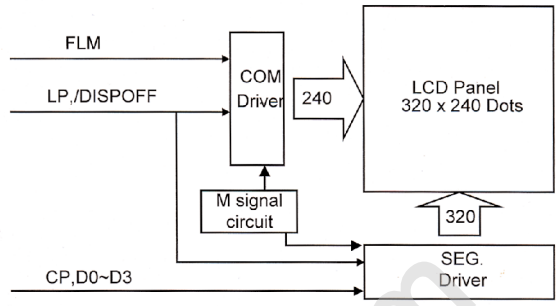

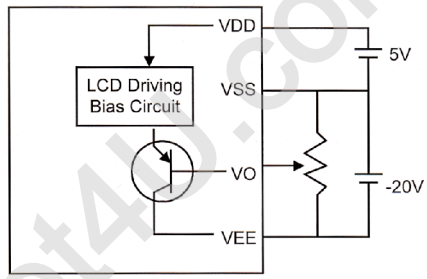

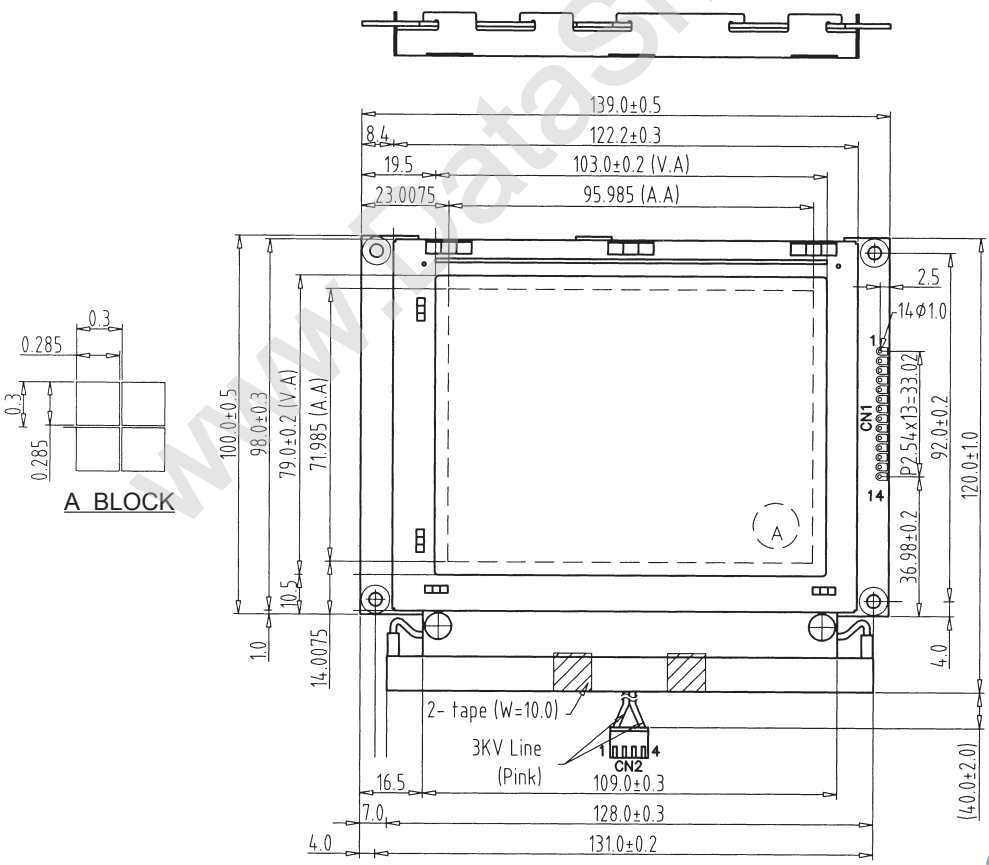

www.DataSheet4U.com