

AZ Displays, Inc.

1. MECHANICAL DATA

(1) Product No.	AGM3224E
(2) Module Size	141.9 (W)mm x 117.0 (H)mm x MAX 14.0 (D)mm (CCFT B.L.)
(3) Dot Size	0.27 (W)mm x 0.27 (H)mm
(4) Dot Pitch	0.30 (W)mm x 0.30 (H)mm
(5) Number of Dots	320 (W) x 240 (H)Dots
(6) Duty	1/240
(7) LCD Display Mode	STN: ☐ Gray Mode ☐ Yellow Mode ☐ Blue Mode FSTN: ☐ Black and White(Normal White/Positive Image) ☐ Black and White(Normal Black/Negative Image) Rear Polarizer: ☐ Reflective ☐ Transflective ☐ Transmissive ☐ Transflective(High Transmissive)
(8) Viewing Direction	☐ 6 O'clock ☐ 12 O'clock ☐ ____O'clock
(9) Backlight	☐ W/O ☐ LED ☐ EL ☐ CCFT
(10) Weight	210 g (approx.)

AZ Displays, Inc.

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V STANDARD

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	7.0	V	
Power Supply for LCD Drive	VDD-VO	0	26.0	V	
Input Voltage	VI	-0.3	VDD	V	
CCFL Driving Voltage	VFL	0	500	Vrms	
CCFL Input Current	IFL	-	7.0	mA rms	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	-10	60	-20	70
Humidity(Without Condensation)	Note 1,3		Note 2,3	

Note 1 Ta ≤ 60℃ : 85%RH max
Ta > 60℃ : Absolute humidity must be lower
than the humidity of 85%RH at 60℃

Note 2 Ta at -20℃ will be < 48hrs, at 70℃ will be < 120hrs

Note 3 Background color changes slightly depending on ambient temperature.
This phenomenon is reversible.

AZ Displays, Inc.

3. ELECTRICAL CHARACTERISTICS

(VDD = 5V±5%)

ITEM		SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Power Supply for Logic		VDD-VSS	—		4.75	5.0	5.25	V
Recommended Operating Voltage for LCD		VDD-VO	Duty=1/240 Bias=1/13	-10℃	—	23.6	24.2	V
				25℃	20.9	21.9	22.6	
				60℃	18.0	18.5	—	
Input Voltage		VIH	H level		0.8VDD	—	VDD	V
		VIL	L level		0	—	0.2VDD	V
Power Supply Current		IDD	FLM = 70 Hz VDD = 5.0 V VEE = -27.0 V VDD-VO = 21.9 V		—	7,5	—	mA
		IEE	PATTERN : □ ■ □ ■ □ ■ ■ □ ■ □ ■ □		—	5.8	—	mA
CCFL LAMP	Open Voltage	V _{Open}	Lamp Current = 5 mArms Frequency = 35 KHz		—	420	—	Vrms
	Lamp Voltage	V _L			—	234	—	Vrms
	Brightness	B			—	23000	—	cd/m²
	Color Degree	X			—	0.34	—	—
		Y			—	0.367	—	

AZ Displays, Inc.

4.OPTICAL CHARACTERISTICS

AT Vop

MODE \ ITEM		Cr(Contrast Ratio)		θ (Viewing Angle)		ϕ (Viewing Angle)	
		25°C		25°C, Cr $\geq$ 2		25°C, Cr $\geq$ 2	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
S	A	—	—	—	—	—	—
	C	—	—	—	—	—	—
	J	3	5	25	45	20	30
T	E,F	3	4	30	60	20	35
	G,H	—	—	—	—	—	—
note		NOTE 5		NOTE 6			


AT $\phi=0^{\circ}$ $\theta=0^{\circ}$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	−10°C	—	1050	2100	ms	NOTE 2
		25°C	—	150	300		
		60°C	—	60	120		
Response Time (fall)	Tf	−10°C	—	1400	2400	ms	NOTE 2
		25°C	—	200	350		
		60°C	—	70	130		

note:
S: TRANSFLECTIVE
T: TRANSMISSIVE
A: GRAY
C: YELLOW
E,F: BLUE
G,H: NORMALLY BLACK
J: NORMALLY WHITE

AZ Displays, Inc.

5. BLOCK DIAGRAM

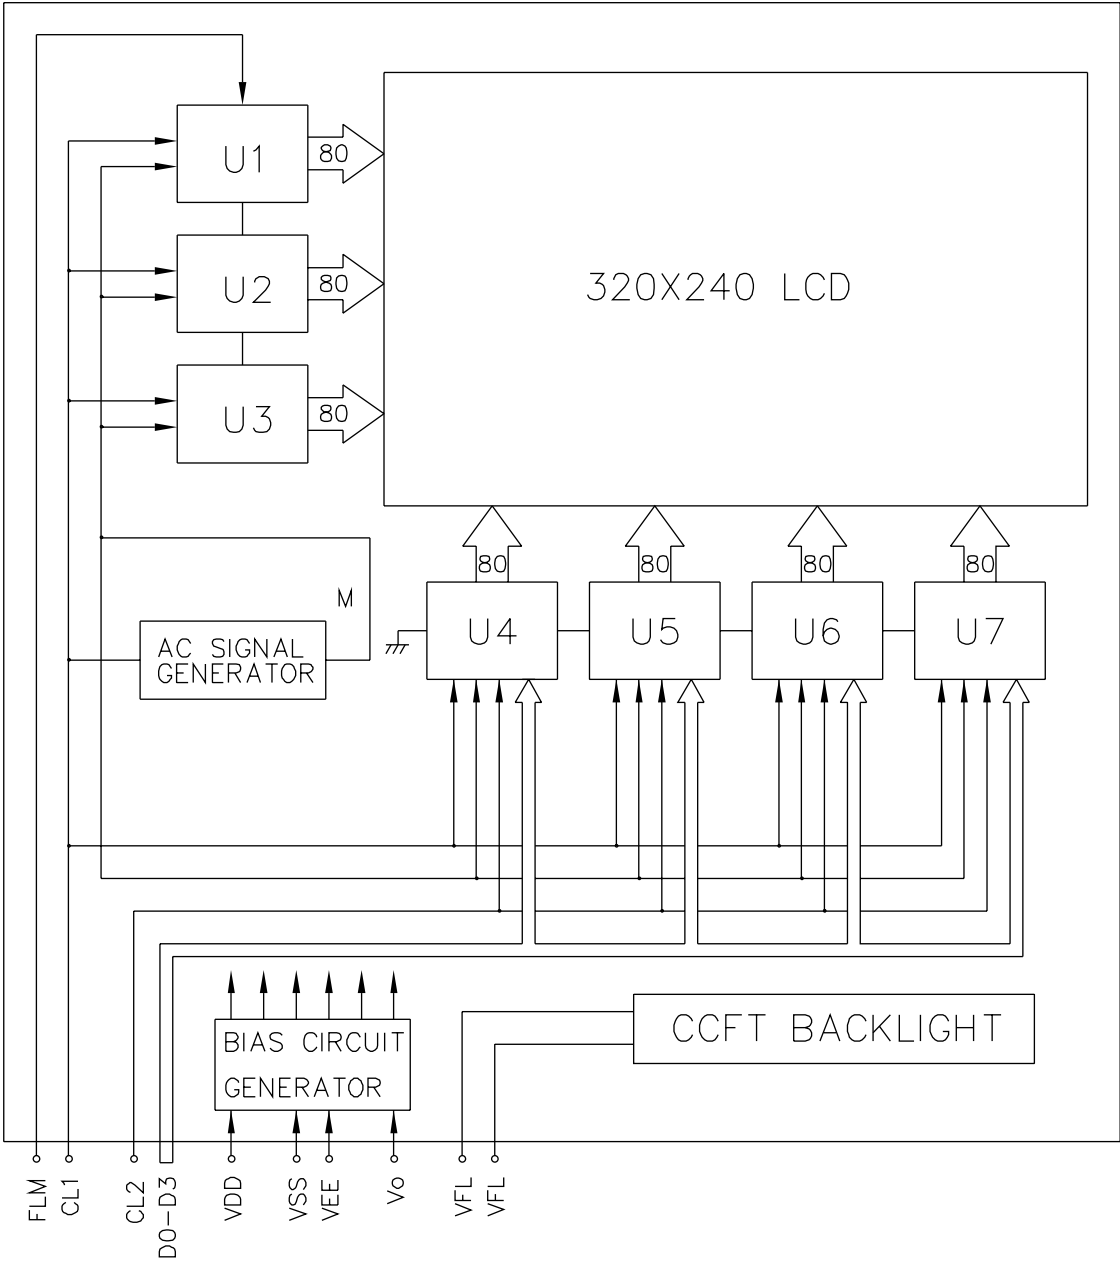

* AC SIGNAL SETTING

J1	J2	J3	J4	J5	J6	J7	J8
L	L	L	L	L	L	H	H

AZ Displays, Inc.

6.INTERNAL PIN CONNECTION


PIN NO.	SYMBOL	LEVEL	FUNCTION
1	VO	—	LCD CONTRAST ADJUST VOLTAGE
2	VEE	—	POWER SUPPLY FOR LCD DRIVING(−27V)
3	D3	H/L	DISPLAY DATA
4	D2		
5	D1		
6	D0		
7	VSS	—	GND FOR LOGIC(0V)
8	VDD	—	POWER SUPPLY FOR LOGIC(+5V)
9	CL2	H→L	DISPLAY DATA FETCH PULSE
10	CL1	H→L	DISPLAY DATA LATCH PULSE
11	FLM	H/L	SCAN START PULSE
12	NC	—	NO CONNECTION
13	NC	—	NO CONNECTION
14	REV	H/L	DISPLAY DATA REVERSE

CCFL CONNECTOR :J.A.E./IL-G-4S-S3C2 OR EQUIVALENT

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	V _{FL}	—	POWER SUPPLY FOR CCFT BACKLIGHT
2	NC	—	—
3	NC	—	—
3	V _{FL}	—	POWER SUPPLY FOR CCFT BACKLIGHT

AZ Displays, Inc.

7. POWER SUPPLY

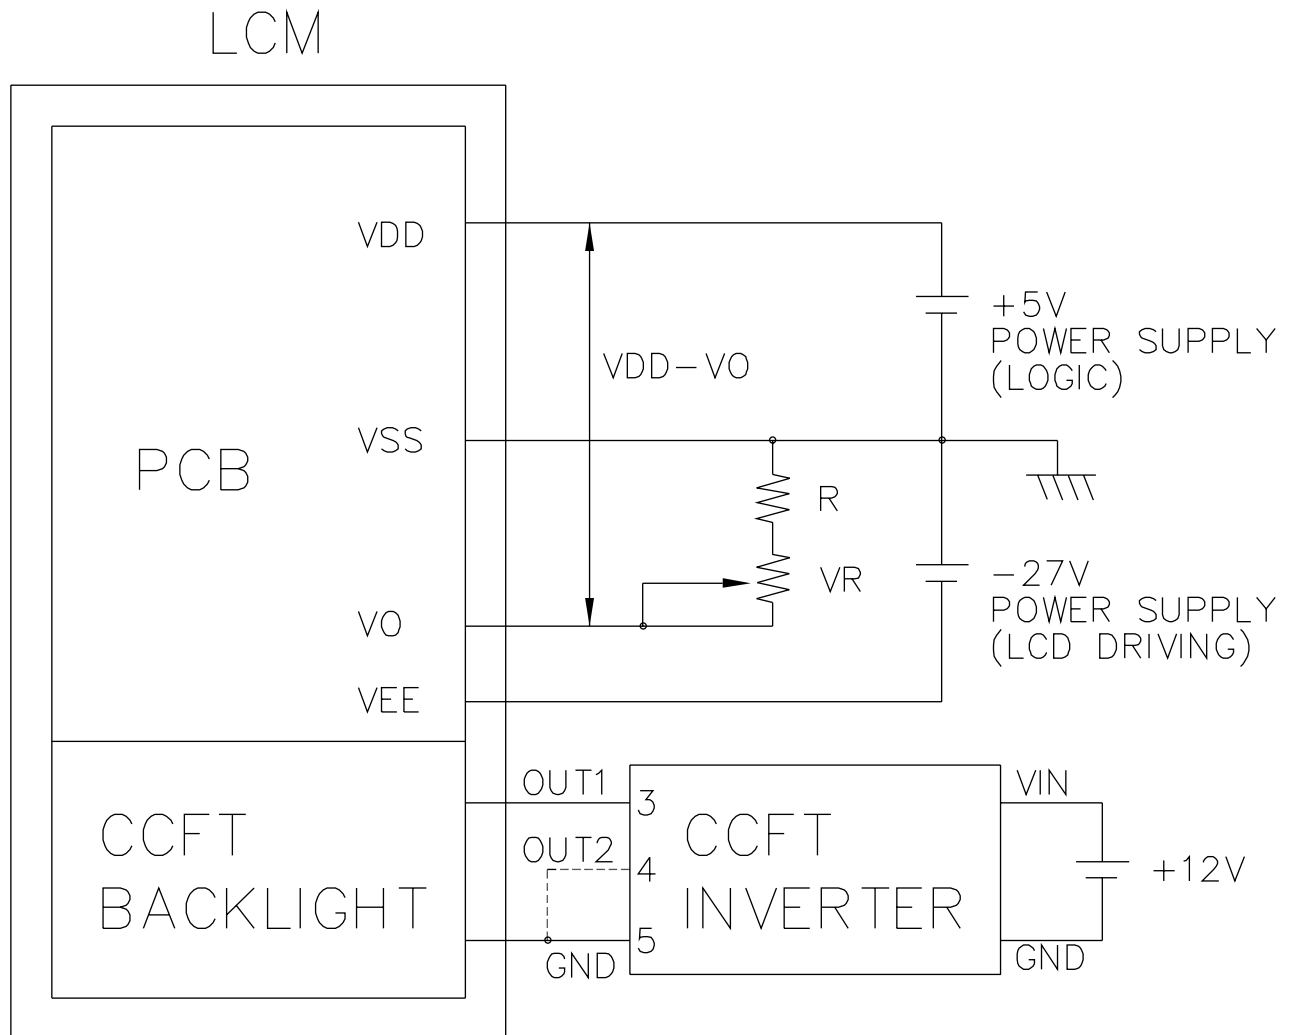

1. VR: 30K~50K Ω


R: 4.3K Ω

2. RECOMMENDED CCFT INVERTER : CXA-L10L(TDK)


AZ Displays, Inc.

8.1 TIMING CHARACTERISTICS

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
CLOCK FREQUENCY	fcp	—	—	6.5	MHZ
CLOCK PULSE WIDTH	tw	63	—	—	ns
CLOCK RISE,FALL TIME	tr , tf	—	—	20	ns
DATA SET UP TIME	tDSU	50	—	—	ns
DATA HOLD TIME	tDHD	50	—	—	ns
CL1 SET UP TIME	tLSU	80	—	—	ns
CL1 → CLOCK TIME	tLC	80	—	—	ns
”FLM” SET UP TIME	tSETUP	100	—	—	ns
”FLM” HOLD TIME	tHOLD	100	—	—	ns
”CL1” PULSE WIDTH	twc	125	—	—	ns

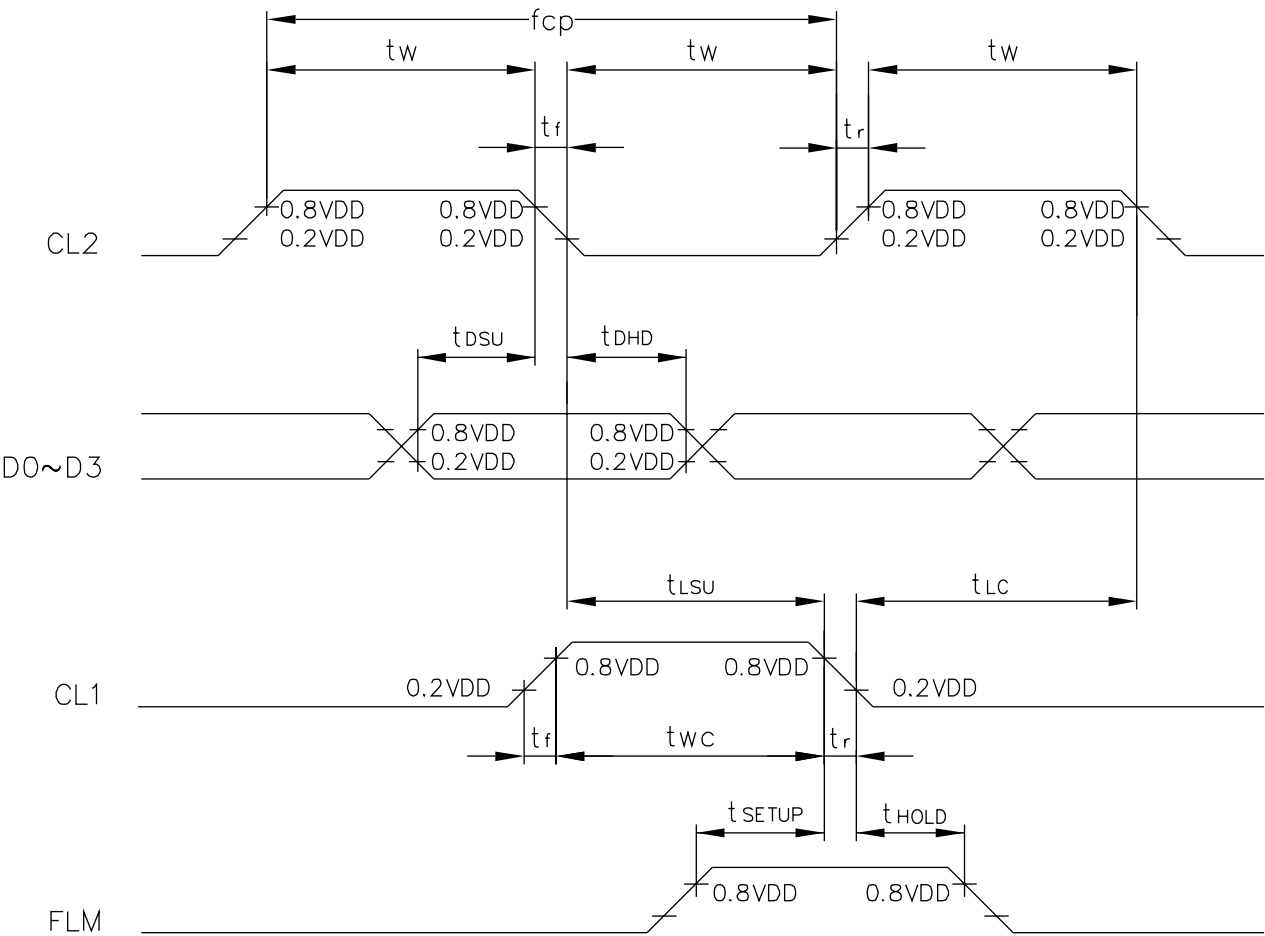


8.2 TIMING CHART OF INPUT SIGNALS

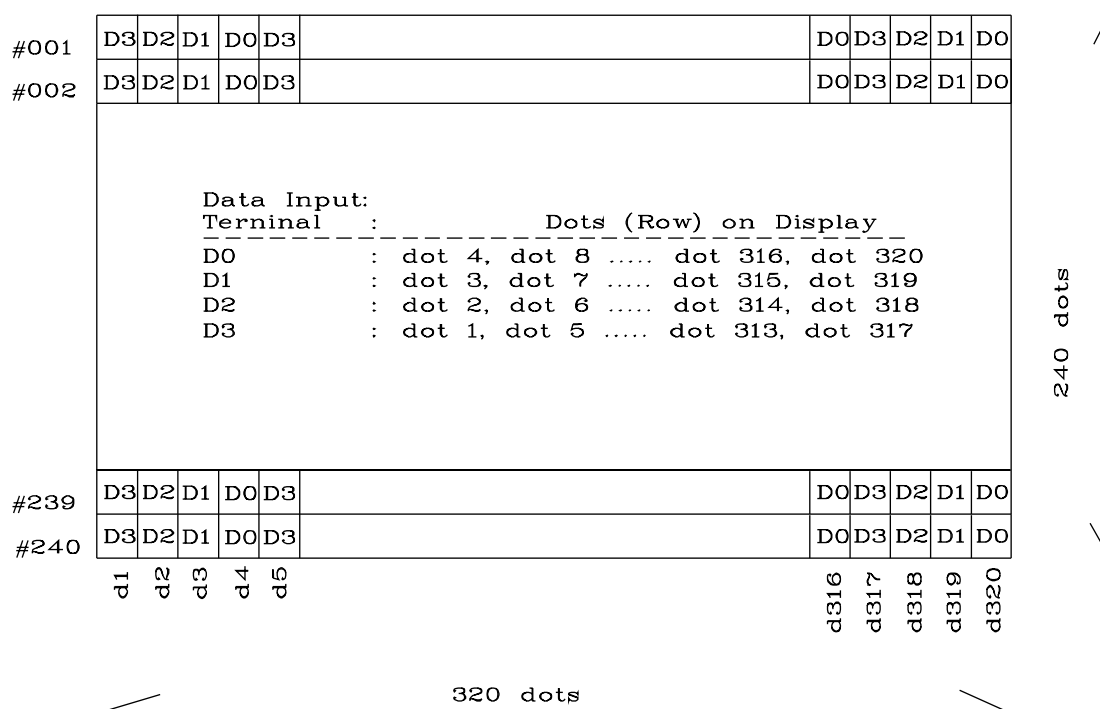

AZ Displays, Inc.

8.4 POWER ON/OFF TIMING

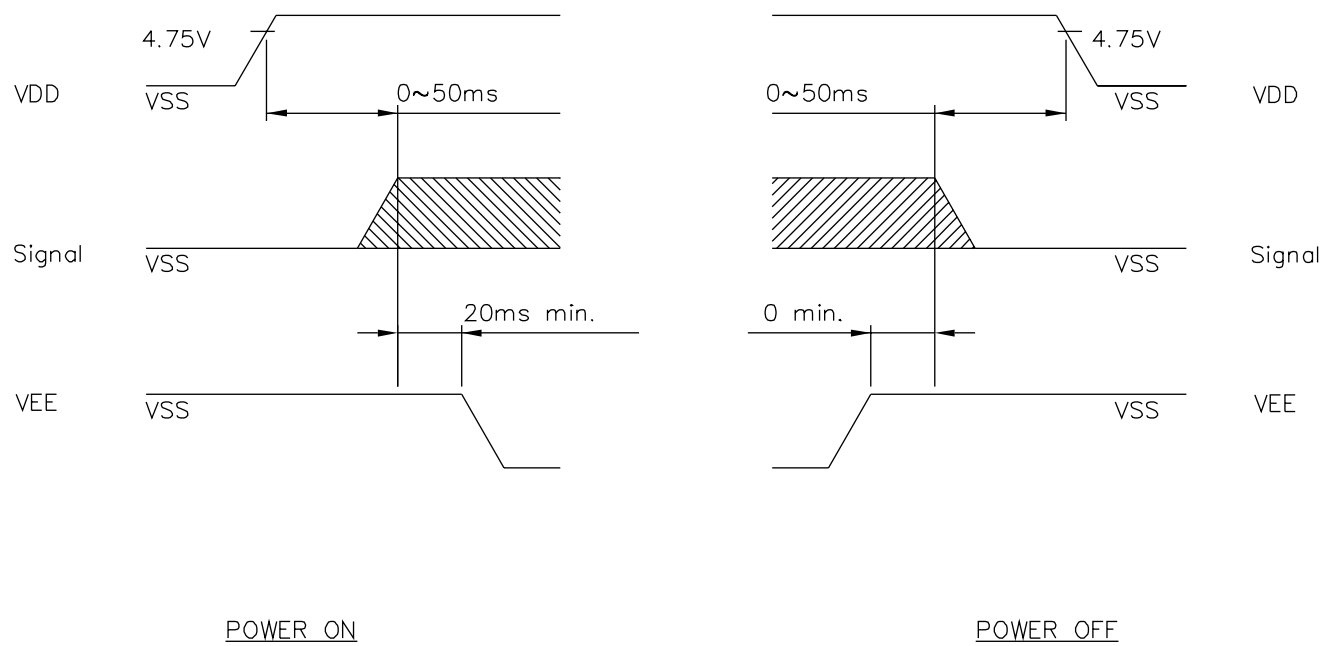


Missing pixels may occur when the LCM is driven beyond above power interface timing sequence.

AZ Displays, Inc.


(NOTE 4)

Definition of Viewing Direction

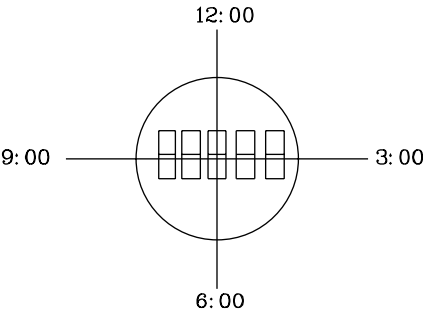

(NOTE 5)

Definition of Viewing Angle

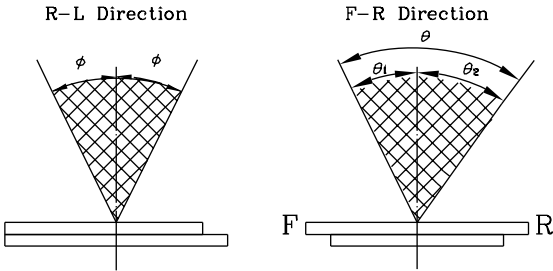


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias
Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

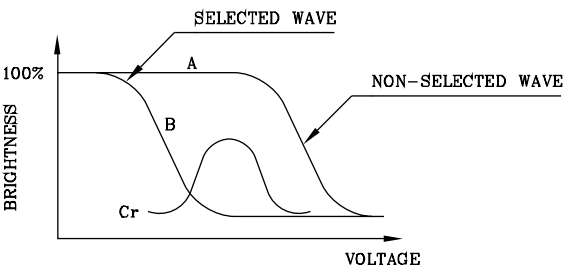

(positive type)


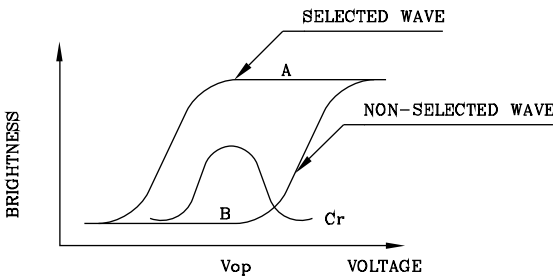


(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias



PinNo.	Symbol	Level	Function
1	V0	—	Operating voltage for LCD driving
2	VEE	—	Power supply for LCD driving
3	D3	H/L	Display data 3
4	D2	H/L	Display data 2
5	D1	H/L	Display data 1
6	D0	H/L	Display data 0
7	VSS	—	GND for logic(0V)
8	VDD	—	Power supply for logic(+5V)
9	CL2	H↔L	Display data latch pulse
10	CL1	H↔L	Display data latch pulse
11	FLM	H/L	Scan start pulse
12	NC	—	No Connection
13	NC	—	No Connection
14	REV	H/L	Display data reverse

NOTES :

- 1.RESOLUTION : 320 X 240 Dots
- 2.CONTROLLER : WITHOUT
- 3.DC/DC : WITHOUT

	AGM3224E		AZ DISPLAYS, INC.	
	NAME	DATE		
APPROVE			TITLE	
CHECK			DWG-NO	MBAX078X
DESIGN				UNIT : mm
DRAW	MAY PING	86.03.24		SCALE : 1/1