


Features

- 27 dB Gain at 1930 MHz
- 18 dBm P1dB
- 33 dBm Output IP3
- 0.95 dB Noise Figure
- Operating at Single 5 V Supply
- 80 mA Current Consumption

Description

The plerow™ ALN-series is the compactly designed surface-mount module for the use of the LNA with or without the following gain blocks in the infrastructure equipment of the mobile wireless (CDMA, GSM, PCS, PHS, WCDMA, DMB, WLAN, WiBro, WiMAX), GPS, satellite communication terminals, CATV and so on. It has an exceptional performance of low noise figure, high gain, high OIP3, and low bias current. The stability factor is always kept more than unity over the application band in order to ensure its unconditionally stable implementation to the application system environment. The surface-mount module package including the completed matching circuit and other components necessary just in case allows very simple and convenient implementation onto the system board in mass production level.



Specifications (in Production)

Typ. @ T = 25°C, V_s = 5 V, Freq. = 1930 MHz, Z_{o,sys} = 50 ohm

Parameter	Unit	Specifications		
		Min	Typ	Max
Frequency Range	MHz	1875		1985
Gain	dB	26	27	
Gain Flatness	dB		± 0.5	± 0.7
Noise Figure	dB		0.95	1.0
Output IP3 ⁽¹⁾	dBm	32	33	
S11 / S22 ⁽²⁾	dB			-18 / -10
Output P1dB	dBm	17	18	
Switching Time ⁽³⁾	μsec		-	
Supply Current	mA		80	100
Supply Voltage	V		5	
Impedance	Ω		50	
Max. RF Input Power	dBm	C.W 29 ~ 31 (before fail)		
Package Type & Size	mm	Surface Mount Type, 13Wx13Lx3.8H		

Operating temperature is -40°C to +85°C.

1) OIP3 is measured with two tones at an output power of 10 dBm / tone separated by 1 MHz.

2) S11/S22 (max) is the worst value within the frequency band.

3) Switching time means the time that takes for output power to get stabilized to its final level after switching DC voltage from 0 V to V_s.


More Information

Website: www.asb.co.kr
 E-mail: sales@asb.co.kr

Tel: (82) 42-528-7223
 Fax: (82) 42-528-7222

ASB Inc., 4th Fl. Venture Town
 Bldg., 367-17 Goijeong-Dong,
 Seo-Gu, Daejeon 302-716, Korea

Outline Drawing (Unit: mm)

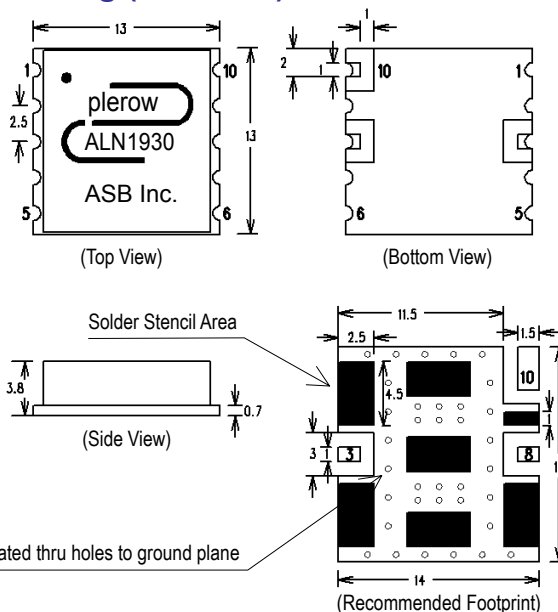

Pin Number	Function
3	RF In
8	RF Out
10	+Vcc
Others	Ground

Note: 1. The number and size of ground via holes in a circuit board is critical for thermal RF grounding considerations.


2. We recommend that the ground via holes be placed on the bottom of all ground pins for better RF and thermal performance, as shown in the drawing at the left side.

**Typical Performance
 (Measured)**


1875~1985

+5 V


S-parameters

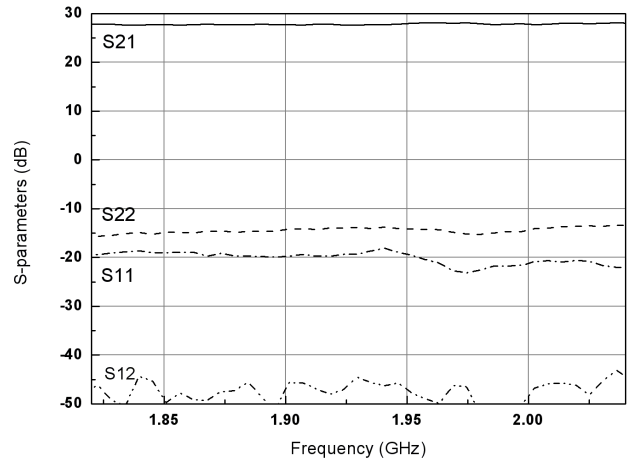


Stability Factor (K)

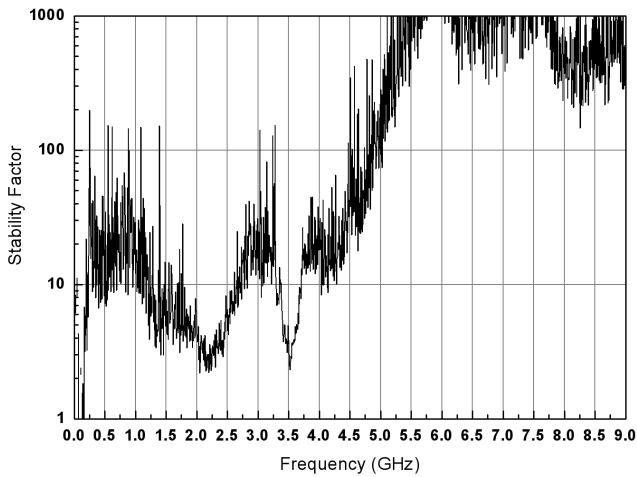


Noise Figure

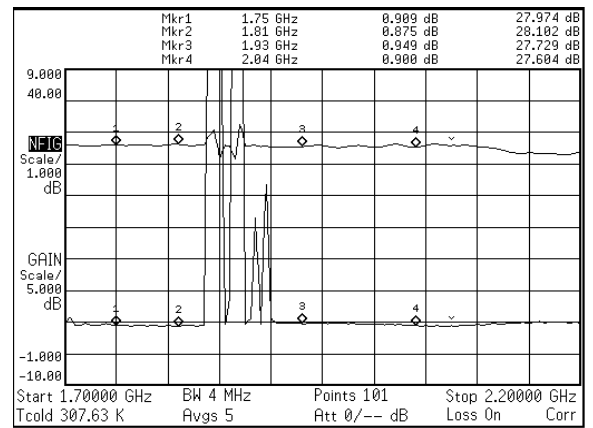




OIP3

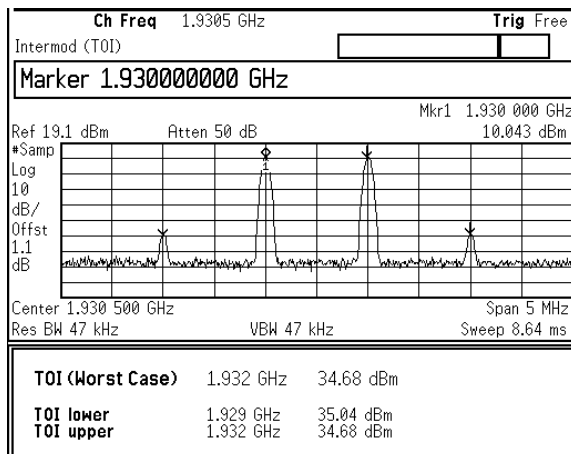

P1dB






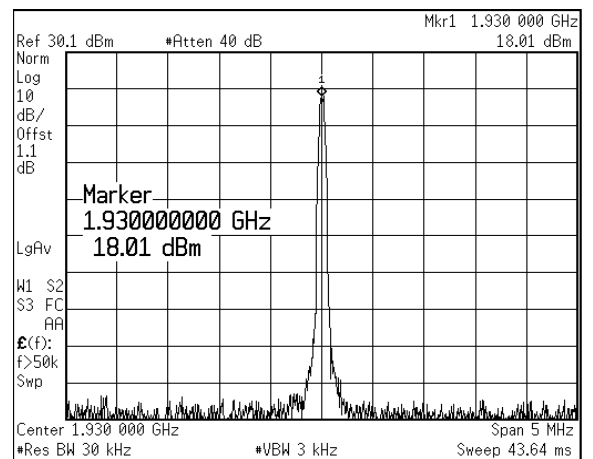


Gain, P1dB, and OIP3 with Temperature (-40°C ~ 100°C)

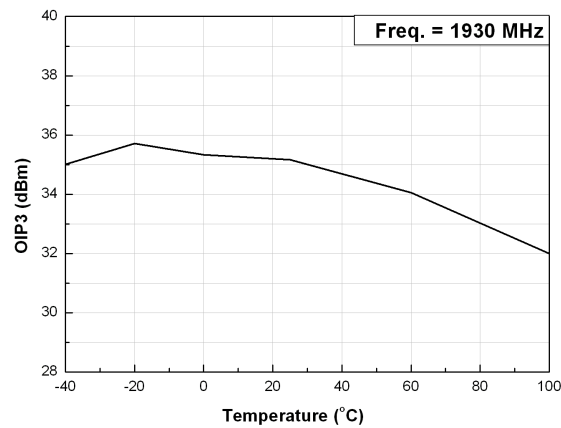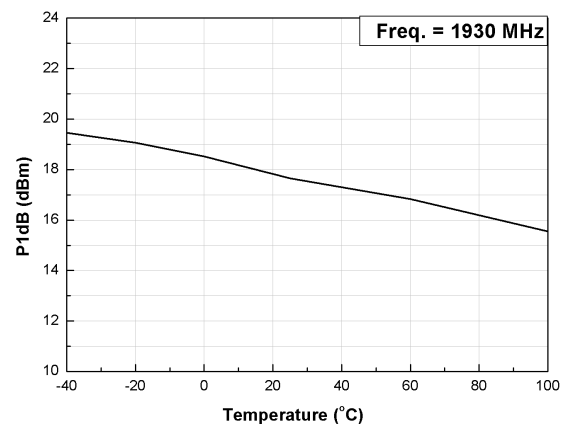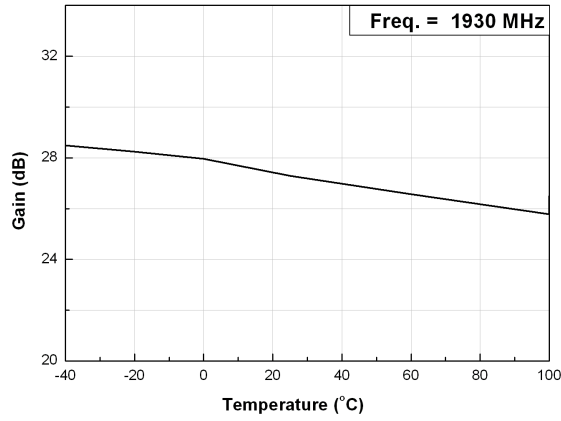


NF, P1dB, OIP3, and S-parameters with Voltage Change (4.5 V ~ 5.5 V)

Voltage (V)	Current (mA)	S21 (dB)			S11 (dB)			S22 (dB)			P1dB (dBm)	OIP3 (dBm)	NF (dB)	
		1875MHz	1930MHz	1985 MHz	1875MHz	1930MHz	1985 MHz	1875MHz	1930MHz	1985 MHz				
4.5	71	27.286	27.151	27.392	-18.317	-18.346	-20.009	-15.352	-14.353	-15.174	16.56	33.39	0.967	
4.6	73	27.34	27.282	27.442	-18.582	-18.438	-20.441	-15.203	-14.355	-15.284	17.06	33.39	0.948	
4.7	75	27.444	27.41	27.544	-18.985	-18.769	-20.931	-15.013	-14.463	-15.162	17.27	33.81	0.968	
4.8	77	27.54	27.481	27.619	-19.091	-19.092	-21.075	-14.859	-14.015	-15.055	17.45	34.11	0.968	
4.9	79	27.627	27.576	27.702	-19.214	-19.026	-21.424	-14.792	-14.024	-15.09	17.77	34.51	0.981	
5	81	27.723	27.628	27.745	-19.304	-19.311	-21.722	-14.654	-13.908	-14.93	18.01	34.68	0.949	
5.1	83	27.801	27.745	27.853	-19.604	-19.22	-21.926	-14.585	-13.868	-14.927	18.14	35.13	0.954	
5.2	85	27.919	27.782	27.932	-19.879	-20.181	-22.56	-14.37	-13.834	-14.711	18.3	35.92	0.978	
5.3	88	27.995	27.813	27.99	-19.807	-19.749	-22.385	-14.283	-13.881	-14.803	18.44	36.16	0.953	
5.4	90	28.05	27.963	28.093	-20.12	-20.079	-23.02	-14.223	-13.661	-14.819	18.56	36.42	0.926	
5.5	92	28.1	27.966	28.085	-20.054	-19.819	-22.592	-14.095	-13.623	-14.779	18.86	36.58	0.955	
Variation	1	21	0.814	0.815	0.693	1.737	1.473	2.583	1.257	0.73	0.395	2.3	3.19	0.012

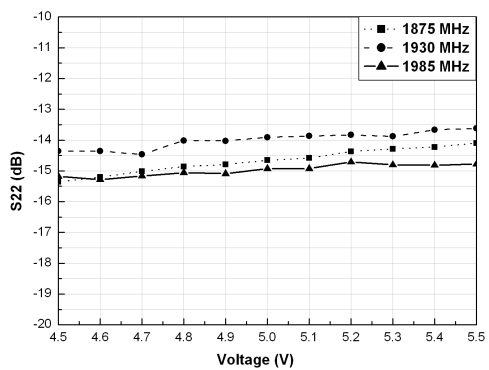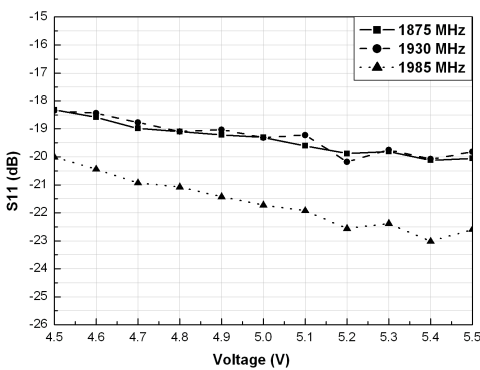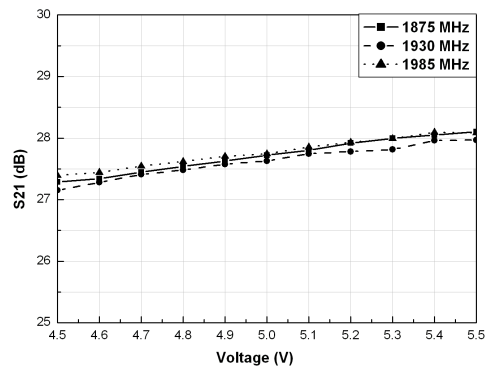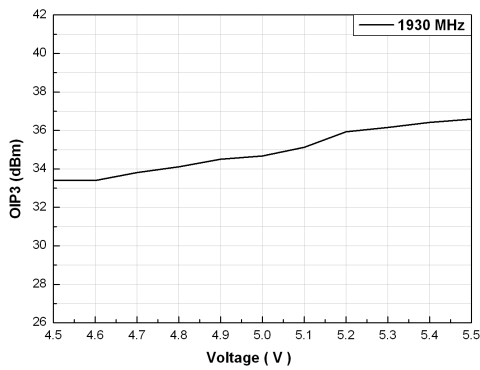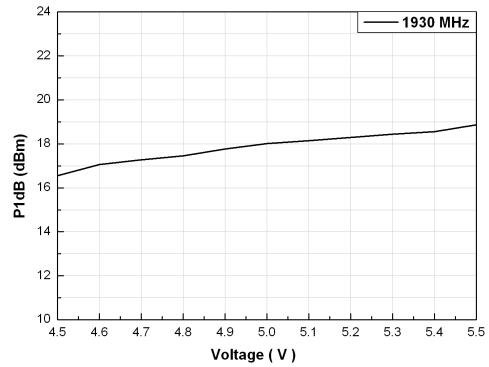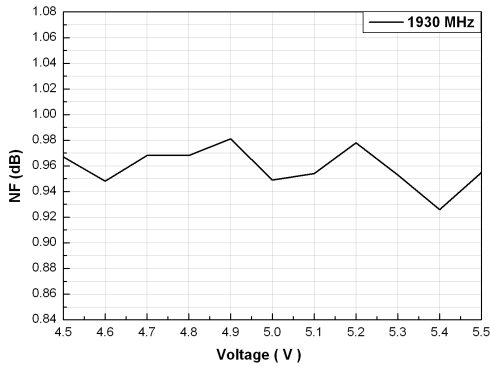


Application Circuit

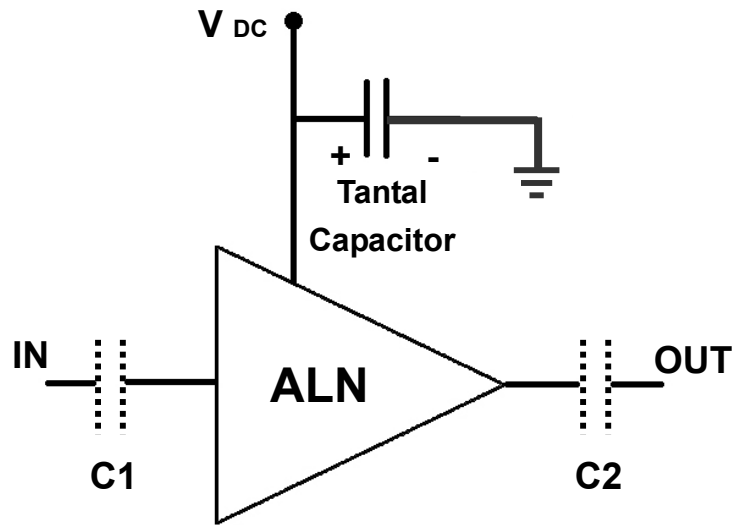


- 1) The tantal capacitor is optional and for bypassing the AC noise introduced from the DC supply. The capacitance value may be determined by customer's DC supply status.
- 2) So-called DC blocking capacitors are always necessarily placed at the input and output port for allowing only the RF signal to pass and blocking the DC component in the signal. The DC blocking capacitors are included inside the LNA module. Therefore, C1 & C2 capacitors may not be necessary, but can be added just in case that the customer wants. The value of C1 & C2 is determined by considering the application frequency.

Recommended Soldering Reflow Process

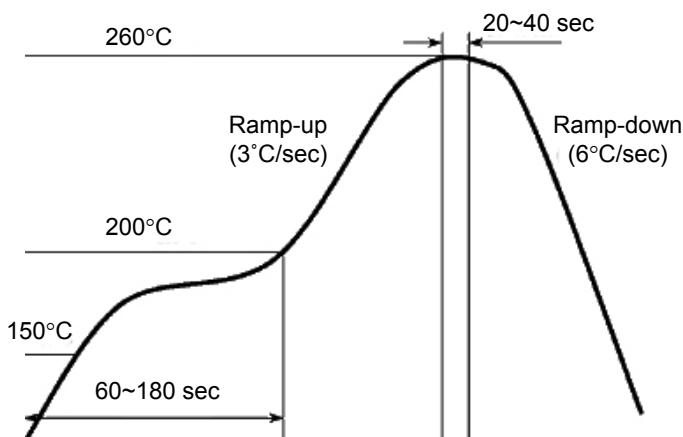

Evaluation Board Layout

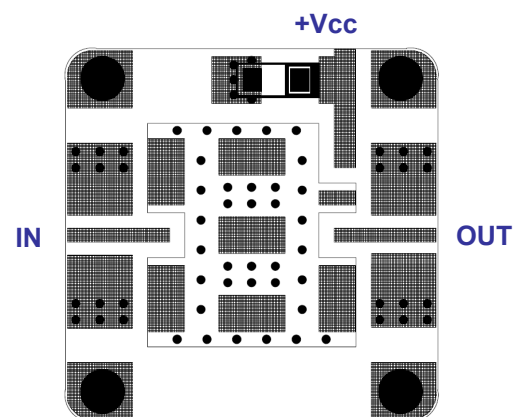

Size 25 x 25mm
(for ALN Series – 13x13mm)