


7 Amps

ALQ07-D

Dual output Quarter Brick

Total Power: 30W
 Input Voltages: 48V
 No. of Outputs: Dual

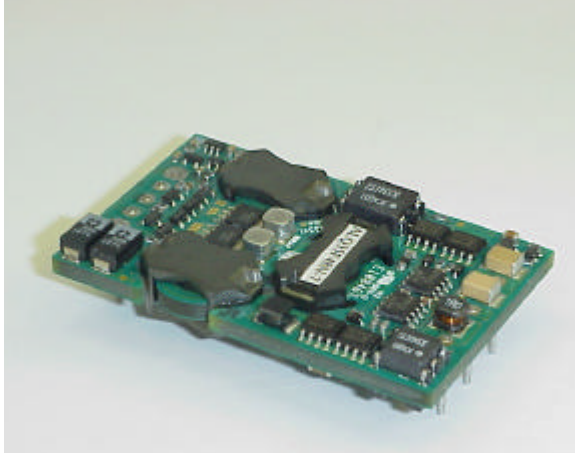

Electrical Specs

Input

Input Range 36 to 75 VDC
 Input Surge 100V /100ms
 Efficiency 82% Typ

Output

Load Regulation 15mV max
 Line Regulation 8mV max
 Cross Regulation 0.5% of V_o nom
 Voltage Tolerance $\pm 1\%$
 Noise/Ripple 50mV max
 Transient Response 5% max deviation with 50% to 75% load
 200 μ s (max) recovery
 Overvoltage Protection 5Vmax for 3.3V_o, 2.26V max for 1.5V_o,
 1.8V max for 1.2V_o, 2.6V max for 1.8V_o
 Current Limit 15A max for $I_{o1} + I_{o2}$
 Switching Frequency 360KHz (typ)

Control

Voltage Adjust 80 to 110%
 Enable TTL compatible
 (positive & negative enable options)

Special Features

- High efficiency (82% Typical)
- -40°C to +85°C Ambient Operation (with airflow)
- Industry standard package
 1.45" x 2.28" x 0.43"
- High capacitive load limit on start-up
- Basic insulation
- Regulation to zero load
- Fixed frequency switching (360KHz)

Environmental

Ambient air operating temperature range:
 -40°C to +85°C (with airflow)
 Storage temperature: -55°C to +125°C
 Overtemperature protection: 101°C
 MTBF: > 1 million hour

Safety

UL 60950
 CSA
 TUV EN60950

AMERICAS

5810 Van Allen Way
 Carlsbad, CA 92008
 Telephone: 760-930-4600
 Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX, UK
 Telephone: 44 (1384) 842-211
 Facsimile: 44 (1384) 843-355

ASIA

Units 2111-2116, Level 21
 Tower1, Metroplaza
 223, Hing Fong Road
 Fwai Fong, New Territories
 Hong Kong
 Telephone: 852-2437-9662
 Facsimile: 852-2402-4426



Ordering Information

Input Voltage	Output Voltage1	Output Current1	Output Voltage2	Output Current2	Efficiency	Model Number
36V to 75V	3.3V	6A*	1.5V	7A*	82% Typ	ALQ07FM48
36V to 75V	3.3V	6A*	1.2V	7A*	82% Typ	ALQ07FK48
36V to 75V	3.3V	6A*	1.8V	7A*	82% Typ	ALQ07FY48


Notes:

Enable Function

"N" = negative logic enable (without "N" = positive enable)

* $I_{o1} + I_{o2} \leq 10A$

Pin Assignments

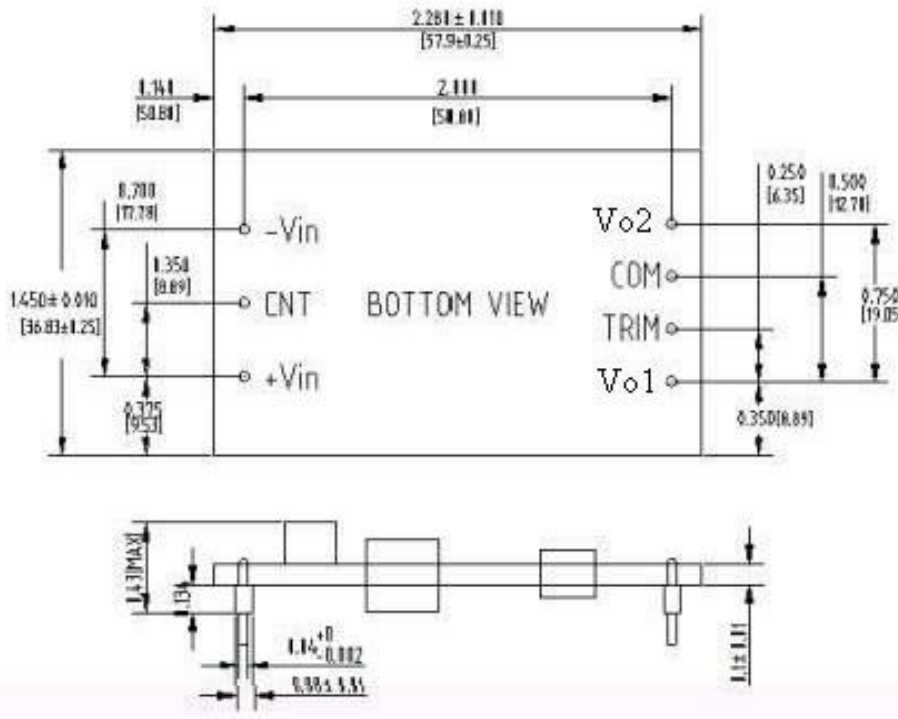

Notes:

Astec reserves the right to make changes to the information contained herein without notice and assumes no liability of its use and application.

REV 02: Oct 2003