

# Am1402A/Am1403A/Am1404A Am2802/Am2803/Am2804

## 1024-Bit Dynamic Shift Registers

### Distinctive Characteristics

- Quad 256-bit, dual 512-bit, single 1024-bit
- 10 MHz frequency operation guaranteed for Am2802, Am2803 and Am2804.
- Low power dissipation of 0.1 mW/bit at 1 MHz
- DTL and TTL compatible
- Both military and commercial grade devices available
- 100% reliability assurance testing in compliance with MIL-STD-883.
- Electrically tested and optically inspected die for the assemblers of hybrid products

### FUNCTIONAL DESCRIPTION


The Am1402A, 3A, and 4A are 1024-bit silicon gate dynamic shift registers. The low threshold characteristics of this technology allow high-speed operation and DTL and TTL compatibility. The Am1402A is a quad 256-bit device; the Am1403A is a dual 512-bit register; and the Am1404A is a

single 1024-bit register. All three devices require two-phase non-overlapping clocks, and provide a one-bit shift on each clock pulse. The Am2802, 3, and 4 registers are functionally identical to the Am1402A, 3A, and 4A, but are guaranteed to operate over frequencies from 400Hz to 10MHz.


5

### BLOCK DIAGRAMS

Am1402A/1403A/1404A Shift Registers

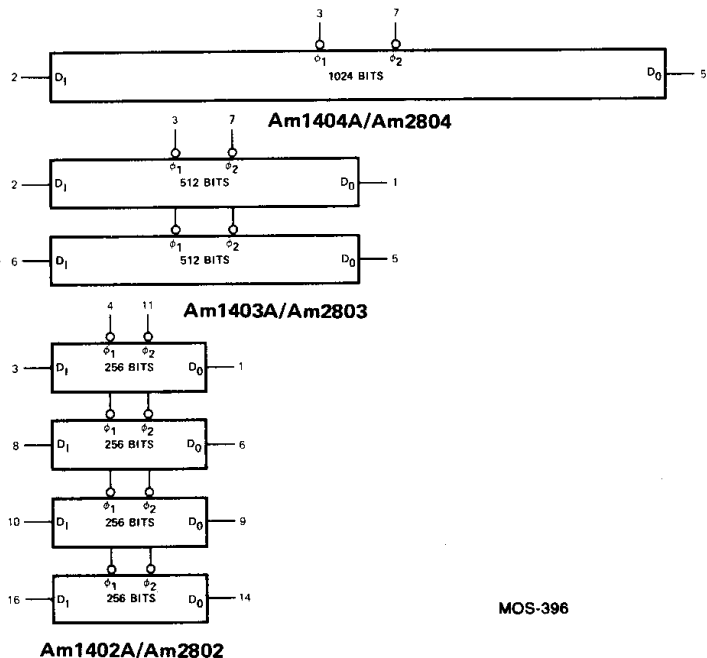

Functional Equivalent of Each Register

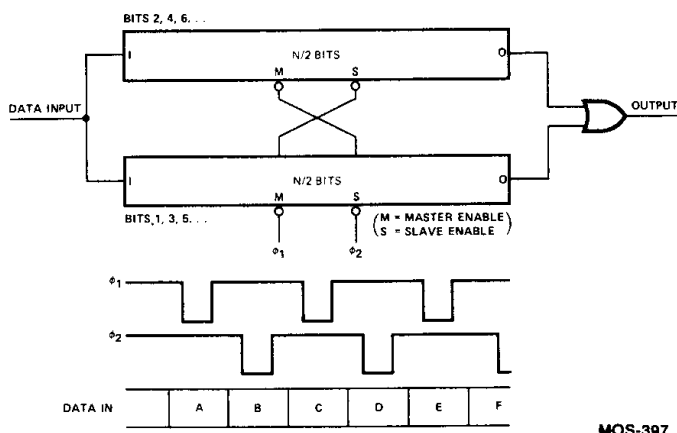

Since the two registers shift on opposite clock pulses, a new data bit is entered on both  $\phi_1$  and  $\phi_2$ . Data entering the register on  $\phi_1$  will appear at the output on  $\phi_1$  (from the negative edge of  $\phi_1$  to the negative edge of  $\phi_2$ ).

### ORDERING INFORMATION

Part Number	Package Type	Temperature Range	Standard Speed Range Order Number	Extended Speed Range Order Number
Am1402A/ 2802	Hermetic DIP	0°C to +70°C	AM1402A	AM2802DC
	Hermetic DIP	-55°C to +125°C	AM1402ADM	AM2802DM
	Molded DIP	0°C to +70°C	AM1402APC	AM2802PC
Am1403A/ 2803	TO-99	0°C to +70°C	AM1403A	AM2803HC
	TO-99	-55°C to +125°C	AM1403AHM	AM2803HM
	Molded DIP	0°C to +70°C	AM1403APC	AM2803PC
Am1404A/ 2804	TO-99	0°C to +70°C	AM1404A	AM2804HC
	TO-99	-55°C to +125°C	AM1404AHM	AM2804HM
	Mini DIP Plastic	0°C to +70°C	AM1404APC	AM2804PC

# Am1402A/03A/04A • Am2802/03/04

## MAXIMUM RATINGS (Above which the useful life may be impaired)

Storage Temperature	-65°C to +160°C
Temperature Under Bias	-55°C to +125°C
Power Dissipation (Note 1)	600 mW
Data and Clock Input Voltages with respect to most Positive Supply Voltage, $V_{CC}$	0.3 V to -20 V
Power Supply Voltage, $V_{DD}$ with respect to $V_{CC}$	0.3 V to -20 V

## OPERATING RANGE

Part Number	$V_{CC}$	$V_{DD}$	Temperature Range
Am1402A, Am1403A, Am1404A	5V ±5%	-4.75V to -9.45V	0°C to +70°C
Am1402ADM, Am1403AHM, Am1404AHM	5V ±5%	-4.75V to -9.45V	-55°C to +125°C
Am2802DC, Am2803HC, Am2804HC	5V ±5%	-5V ±5%	0°C to +70°C
Am2802DM, Am2803HM, Am2804HM	5V ±5%	-5V ±5%	-55°C to +125°C

## ELECTRICAL CHARACTERISTICS over operating range

Parameters	Description	Test Conditions	Am1402A, 3A, 4A			Am2802, 3, 4			Units		
			Min.	Typ.	Max.	Min.	Typ.	Max.			
$V_{IH}$	Input HIGH Voltage		$V_{CC}-2.0$			$V_{CC}-2.0$			V		
$V_{IL}$	Input LOW Voltage		$V_{CC}-10$		$V_{CC}-4.2$	$V_{CC}-10$		$V_{CC}-4.2$	V		
$I_I$	Input Current	$T_A = 25^\circ\text{C}$		<10	500		<10	500	nA		
$I_O$	Output Leakage Current	$T_A = 25^\circ\text{C}, V_{OUT} = 0\text{V}$		<10	1000		<10	1000	nA		
$I_{\phi L}$	Clock Leakage Current	$T_A = 25^\circ\text{C}, V_{\phi} = -12\text{V}$		10	1000		10	1000	nA		
$V_{OH}$	Output HIGH Voltage Driving TTL	$R_L = 3\text{k to }V_{DD}, V_{DD} = -5\text{V} \pm 5\%$	2.4	3.5		$V_{CC}-1.9$	$V_{CC}-1$		V		
	Output HIGH Voltage Driving MOS	$R_L = 4.7\text{k to }V_{DD}, V_{DD} = -5\text{V} \pm 5\%$	$V_{CC}-1.9$	$V_{CC}-1$		$V_{CC}-1.9$	$V_{CC}-1$				
	Output HIGH Voltage Driving TTL	$R_L = 4.7\text{k to }V_{DD}, V_{DD} = -9\text{V} \pm 5\%$	2.4	3.5							
	Output HIGH Voltage Driving MOS	$R_L = 6.2\text{k to }V_{DD}, 3.9\text{k to }V_{CC}, V_{DD} = -9\text{V} \pm 5\%$	$V_{CC}-1.9$	$V_{CC}-1$							
$V_{OL}$	Output LOW Voltage	$V_{DD} = -5\text{V} \pm 5\%, R_L = 3\text{k to }V_{DD}, I_{OL} = -1.6\text{mA}$		-0.3	0.5		-0.3	0.5	V		
		$R_L = 4.7\text{k to }V_{DD}, V_{DD} = -9\text{V} \pm 5\%, I_{OL} = -1.6\text{mA}$		-0.3	0.5						
$V_{\phi H}$	Clock Input HIGH Level		$V_{CC}-1$		$V_{CC}+0.3$	$V_{CC}-1$		$V_{CC}+0.3$	V		
$V_{\phi L}$	Clock Input LOW Level	$V_{DD} = -5\text{V} \pm 5\%$	$V_{CC}-15$		$V_{CC}-17$	$V_{CC}-15$		$V_{CC}-17$	V		
		$V_{DD} = -9\text{V} \pm 5\%$	$V_{CC}-12.6$		$V_{CC}-14.7$	$V_{CC}-12.6$		$V_{CC}-14.7$			
$I_{DD(-5)}$ (Note 1)	$V_{DD}$ Current, $V_{DD} = -5\text{V} \pm 5\%$	5MHz Data Rate 33% Duty Cycle $V_{\phi L} = V_{CC}-17\text{V}$	$T_A = 25^\circ\text{C}$		40	50		40	50	mA	
			$T_A = 0^\circ\text{C}$			56			56		
			$T_A = -55^\circ\text{C}$					70			70
		10MHz Data Rate 40% Duty Cycle $V_{\phi L} = V_{CC}-17\text{V}$	$T_A = 25^\circ\text{C}$						50	60	mA
			$T_A = 0^\circ\text{C}$							68	
			$T_A = -55^\circ\text{C}$							80	
$I_{DD(-9)}$ (Note 1)	$V_{DD}$ Current, $V_{DD} = -9\text{V} \pm 5\%$	3MHz Data Rate 26% Duty Cycle $V_{\phi L} = V_{CC}-14.7\text{V}$	$T_A = 25^\circ\text{C}$		30	40		30	40	mA	
			$T_A = 0^\circ\text{C}$			45			45		
			$T_A = -55^\circ\text{C}$								60

Note: 1. Power dissipation is directly proportional to clock duty cycle and independent of frequency. The duty cycle is the clock LOW time (one clock line) divided by the clock period. At  $V_{DD} = -9\text{V}$  the maximum duty cycle is 26%. The duty cycle should be kept as small as possible to minimize power dissipation.

## SWITCHING CHARACTERISTICS AND OPERATING CONDITIONS (Over Operating Range)

Am1402A/Am1403A/Am1404A

 $V_{DD} = -5V \pm 5\%$   
(Test Load 1) $V_{DD} = -9V \pm 5\%$   
(Test Load 2)

Parameter	Description	Test Conditions	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
$f_c$	Clock Frequency Range		(Note 1)		2.5	(Note 1)		1.5	MHz
$f_d$	Data Repetition Rate		(Note 1)		5.0	(Note 1)		3.0	MHz
$t_{\phi PW}$	Clock Pulse Width		0.13		10	0.17		10	$\mu s$
$t_{\phi d}$	Clock Pulse Delay (Note 2)	$t_{\phi PW} = 130 ns$	10		(Note 2)	10		(Note 2)	ns
$t_r, t_f$	Clock Pulse Rise/Fall Time				1000			1000	ns
$t_s$	Data Set Up Time	$t_r = t_f \leq 50 ns$	30			60			ns
$t_h$	Data Hold Time	$t_r = t_f \leq 50 ns$	20			20			ns
$t_{pd+}, t_{pd-}$	Clock to Data Out Delay				90			110	ns
$C_{IN}^*$	Input Capacitance	@ 1 MHz, 250 mVPP		5	10		5	10	pF
$C_{OUT}^*$	Output Capacitance	@ 1 MHz, 250 mVPP		5	10		5	10	pF
$C_{\phi}^*$	Clock Capacitance	@ 1 MHz, 250 mVPP		110	140		110	140	pF

## SWITCHING CHARACTERISTICS AND OPERATING CONDITIONS (Over Operating Range)

Am2802/Am2803/Am2804

Clock Pulse Width = 70nsec  
Clock LOW Level = ( $V_{CC}-15$ ) $V_{DD} = -5V \pm 5\%$   
(Test Load 1)

Parameter	Description	Test Conditions	Min.	Typ.	Max.	Units
$f_c$	Clock Frequency Range	$t_r = t_f = 10 ns$	(Note 1)		5.0 (Note 4)	MHz
$f_d$	Data Repetition Rate (Note 1)		(Note 3)		10.0 (Note 4)	MHz
$t_{\phi PW}$	Clock Pulse Width		0.07		10	$\mu s$
$t_{\phi d}$	Clock Pulse Delay	$t_{\phi PW} = 70 ns$	10		(Note 2)	ns
$t_r, t_f$	Clock Pulse Rise/Fall Time				1000	ns
$t_s$	Data Set Up Time		30			ns
$t_h$	Data Hold Time		20			ns
$t_{pd+}, t_{pd-}$	Clock to Data Out Delay				90	ns

## Notes:

- See minimum operating frequency graph for low limits on data rep. rate.
- Upper limit on  $t_{\phi d}$  is determined by minimum frequency.
- See max clock pulse delay graph for guarantee.
- For additional information on 10MHz operation (5MHz clock rate) see AMD application note dated July 1973 on "Applications of Dynamic Shift Registers."

## DESCRIPTION OF TERMS

## OPERATIONAL TERMS

 $V_{OH}$  Minimum logic HIGH output voltage with output HIGH current flowing out of output. $V_{OL}$  Maximum logic LOW output voltage with output LOW current into junction of output and load resistor. $V_{IH}$  Logic HIGH input voltage. $V_{IL}$  Logic LOW input voltage. $V_{OL}$  Clock LOW input voltage. $V_{OH}$  Clock HIGH input voltage. $I_i$  Input leakage current. $I_o$  Output leakage current. $I_{DD}$  Power supply current. $C_{IN}$  Input capacitance. $C_{\phi}$  Input clock capacitance. $C_{OUT}$  Output capacitance.


## FUNCTIONAL TERMS

 $\phi_1, \phi_2$  The two clock phases required by the dynamic shift register. $f_c$  The clock frequency of the shift register. $f_d$  The input data repetition rate.

## SWITCHING TERMS


 $t_{\phi d}$  The delay between the LOW to HIGH transition of a clock phase to the HIGH to LOW transition of the other clock phase. $t_{\phi PW}$  The clock pulse widths necessary for correct operation. $t_r, t_f$  The clock pulse rise and fall times necessary for correct operation. $t_s$  The time required for the input data to be present prior to the LOW to HIGH transition of the clock phase to ensure correct operation. $t_h$  The time required for the input data to remain present after the LOW to HIGH transition of the clock phase to ensure correct operation. $t_{pd+}$  The propagation delay from the HIGH to LOW clock phase  $\phi_1$  transition to the output LOW to HIGH transition. $t_{pd-}$  The propagation delay from the HIGH to LOW clock phase  $\phi_2$  transition to the output HIGH to LOW transition.

**SWITCHING WAVEFORMS**

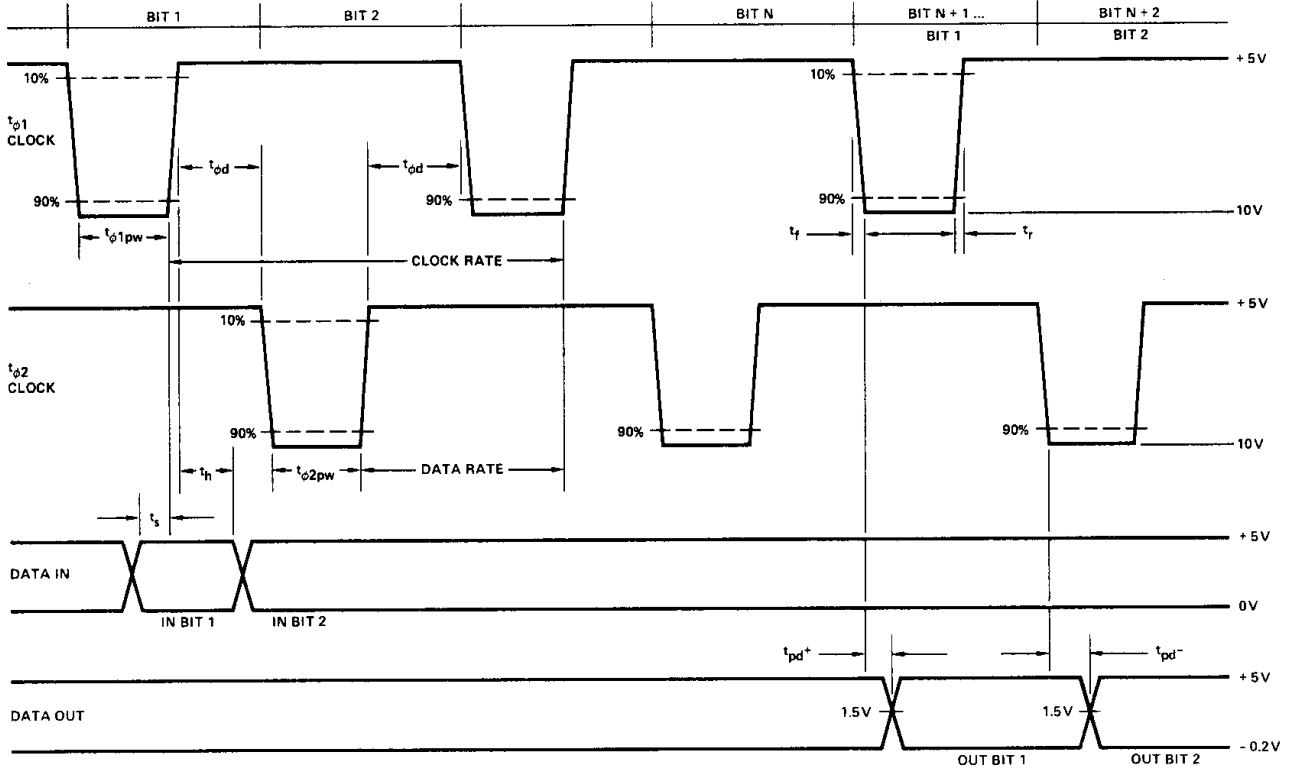


Clock Rise Time 10 ns  
 Clock Fall Time 10 ns  
 Output Load 1 TTL Load

**Test Load 1**

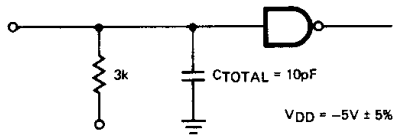


**Test Load 2**

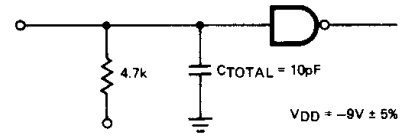

MOS-398


**CIRCUIT DIAGRAM**

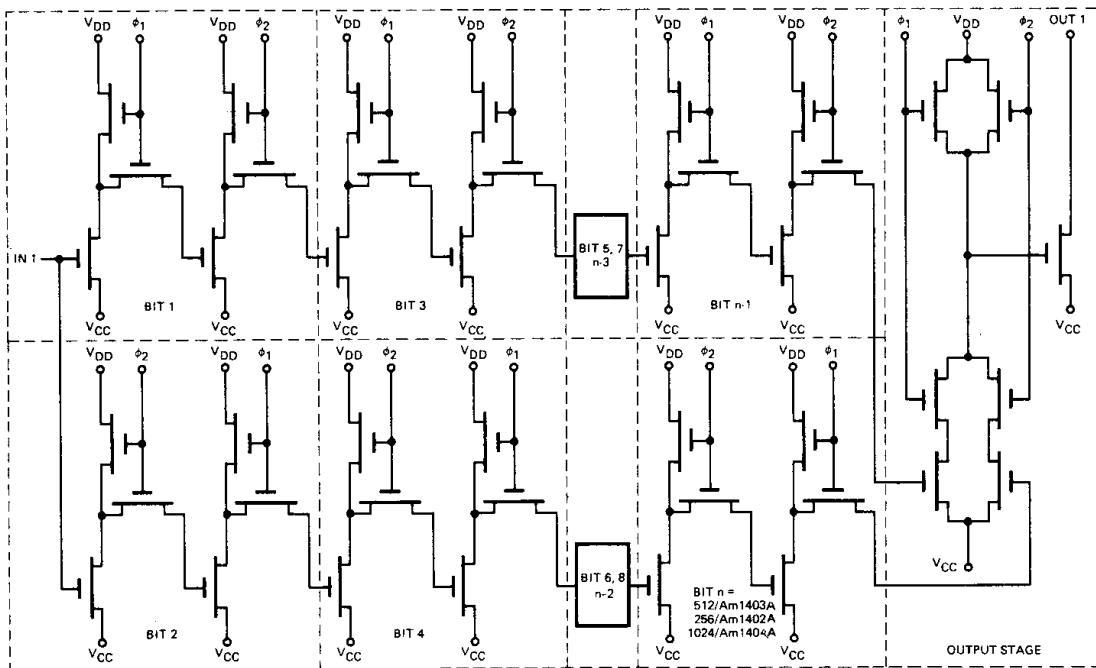


MOS-399

**POWER CHARACTERISTICS**


**Minimum Operating Data Rate or Maximum Clock Pulse Delay Versus Temperature (For Small Duty Cycles)**

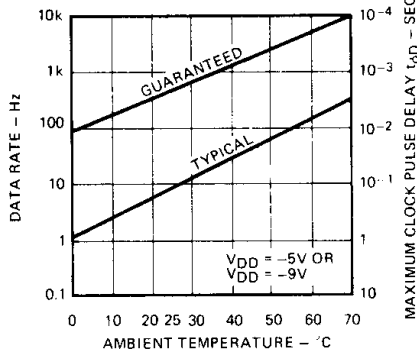


**IOH Versus VOH**

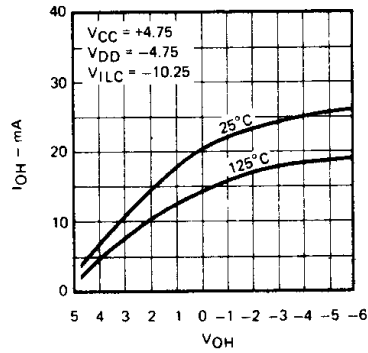

**Typical Range of tpd+ Versus Temperature**

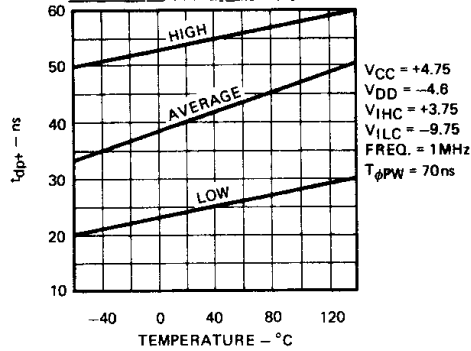

**IDD Versus Clock Duty Cycle**

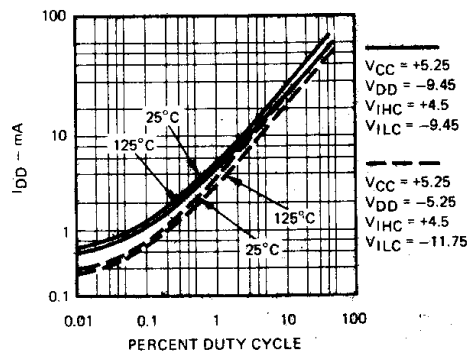


**5**


MOS-400

**ORDERING INFORMATION**


**Am2802/Am1402A**




**Am2803/Am1403A**




**Am2804/Am1404A**



**Am2803/Am1403A**




**Am2804/Am1404A**




MOS-401

**APPLICATIONS**

**256-Bit Delay**  
Write Recirculate Logic

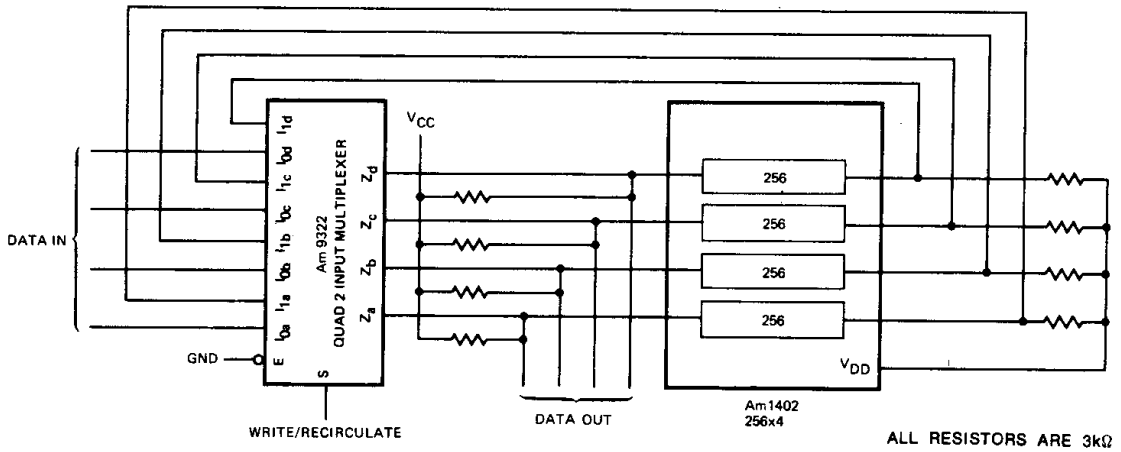

**DTL/TTL To MOS To DTL/TTL Interface**

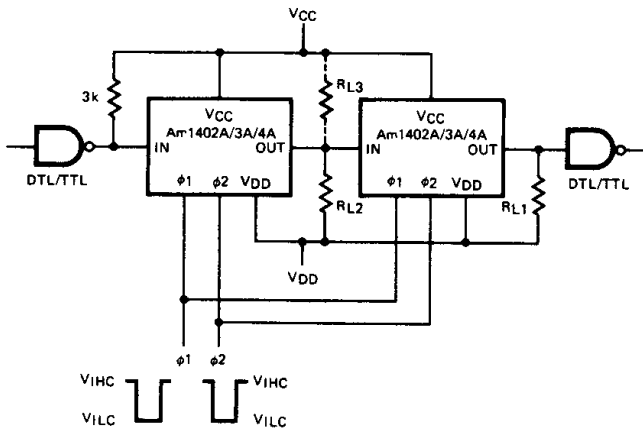


**$R_L$  Load Resistor Values for Different  $V_{DD}$  Supplies**

	$V_{CC} = 5V$ $V_{DD} = -5V$	$V_{CC} = 5V$ $V_{DD} = -9V$
$R_{L1}$	3.0 k	4.7 k
$R_{L2}$	4.7 k	6.2 k
$R_{L3}$	Not required	3.9 k

MOS-402

PAD	1402A/2802		1403A/2803		1404A/2804	
	PIN	SIGNAL	PIN	SIGNAL	PIN	SIGNAL
1	1	OUT 1	2	IN 1	2	IN
2	3	IN 1	3	$\phi 1$	3	$\phi 1$
3	4	$\phi 1$	4	$V_{CC}$	4	$V_{CC}$
4	5	$V_{CC}$	5	OUT 2	5	OUT
5	6	OUT 2				
6	8	IN 2				
7	9	OUT 3	6	IN 2	7	$\phi 2$
8	10	IN 3	7	$\phi 2$		
9	11	$\phi 2$	8	$V_{DD}$		
10	12	$V_{DD}$	1	OUT 1	8	$V_{DD}$
11	14	OUT 4				
12	16	IN 4				

**Metallization and Pad Layout**

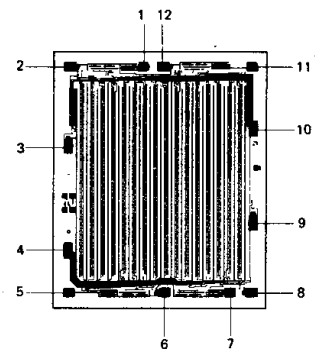

DIE SIZE .109" X .131"