

**5-CHANNEL MOTOR DRIVER FOR DVD PLAYER****AM5668****General Description**

The AM5668 is a five-channel BTL driver IC, in which four channels are voltage-type BTL drivers for tracking and focus actuators, sled and spindle motors, the other one channel is DC motor driver for tray which supports forward/reverse control. This IC also contains two general-purpose independent precise voltage comparators.

The AM5668 is available in standard HSOP-28 package.

Features

- 4-Channel DC Motor BTL Driver
- 1-Channel Forward/Reverse Control DC Motor BTL Driver
- Two Built-in Comparators
- Built-in Level Shift Circuit
- Built-in Mute Mode
- Built-in Thermal Shutdown Circuit
- Operating Voltage: 4.3V to 13.2V

Application

- DVD Player

www.DataSheet4U.com



Figure 1. Package Type of AM5668



5-CHANNEL MOTOR DRIVER FOR DVD PLAYER

AM5668

Pin Configuration

M28 Package
(HSOP-28)

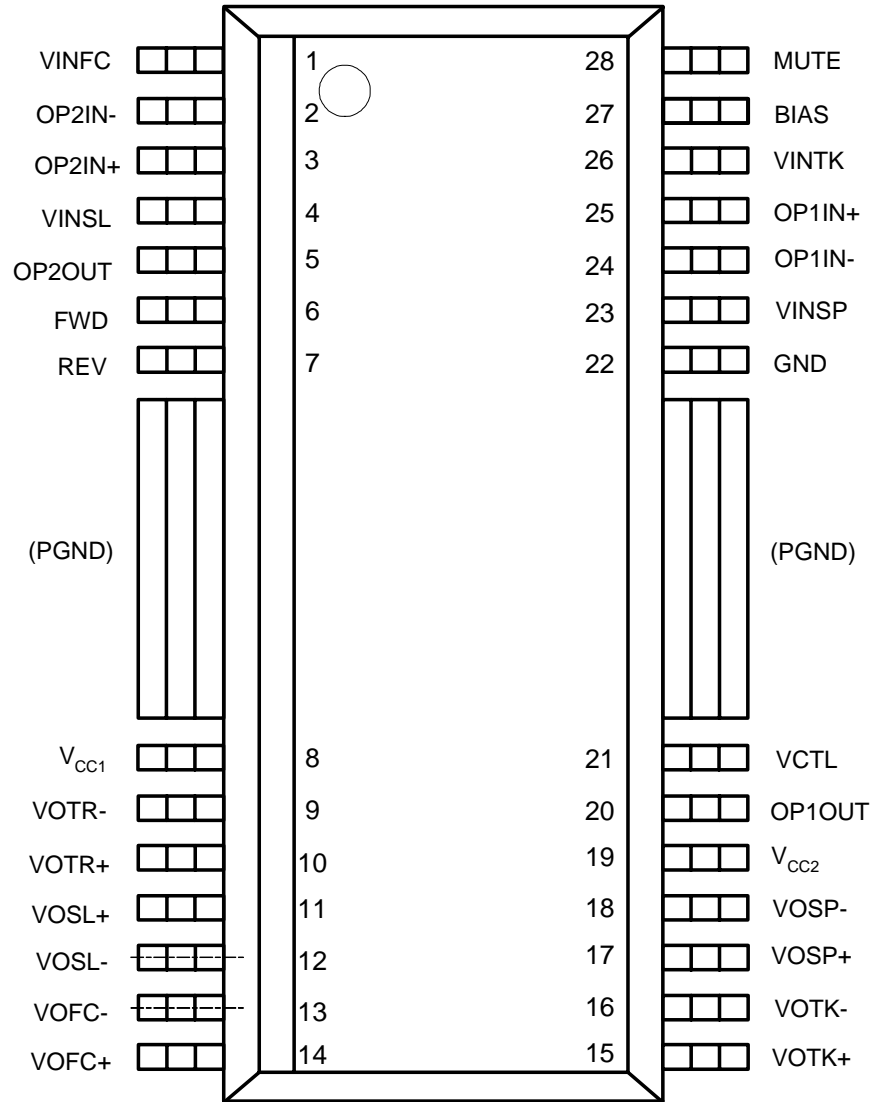


Figure 2. Pin Configuration of AM5668 (Top View)

**5-CHANNEL MOTOR DRIVER FOR DVD PLAYER****AM5668****Pin Description (Note 1)**

| Pin Number | Pin Name | Function |
|------------|------------------|---|
| 1 | VINFC | Input for focus driver |
| 2 | OP2IN- | Comparator 2 input (-) |
| 3 | OP2IN+ | Comparator 2 input (+) |
| 4 | VINSL | Input for the sled driver |
| 5 | OP2OUT | Comparator 2 output |
| 6 | FWD | Tray driver forward input |
| 7 | REV | Tray driver reverse input |
| 8 | V _{CC1} | V _{CC} for pre-driver block and power block of sled and tray |
| 9 | VOTR- | Tray driver output (-) |
| 10 | VOTR+ | Tray driver output (+) |
| 11 | VOSL+ | Sled driver output (+) |
| 12 | VOSL- | Sled driver output (-) |
| 13 | VOFC- | Focus driver output (-) |
| 14 | VOFC+ | Focus driver output (+) |
| 15 | VOTK+ | Tracking driver output (+) |
| 16 | VOTK- | Tracking driver output (-) |
| 17 | VOSP+ | Spindle driver output (+) |
| 18 | VOSP- | Spindle driver output (-) |
| 19 | V _{CC2} | V _{CC} for power block of spindle, tracking and focus |
| 20 | OP1OUT | Comparator 1 output |
| 21 | VCTL | Speed control input of tray driver |
| 22 | GND | Ground |
| 23 | VINSP | Input for spindle driver |
| 24 | OP1IN- | Comparator 1 input (-) |
| 25 | OP1IN+ | Comparator 1 input (+) |
| 26 | VINTK | Input for tracking driver |
| 27 | BIAS | Input for reference voltage |
| 28 | MUTE | Input for mute control |

Note 1: Symbols of + and - (output of drivers) mean polarity with respect to input pin.
(For example, if voltage of pin 1 is high, pin 14 is high and pin 13 is low.)



5-CHANNEL MOTOR DRIVER FOR DVD PLAYER

AM5668

Functional Block Diagram

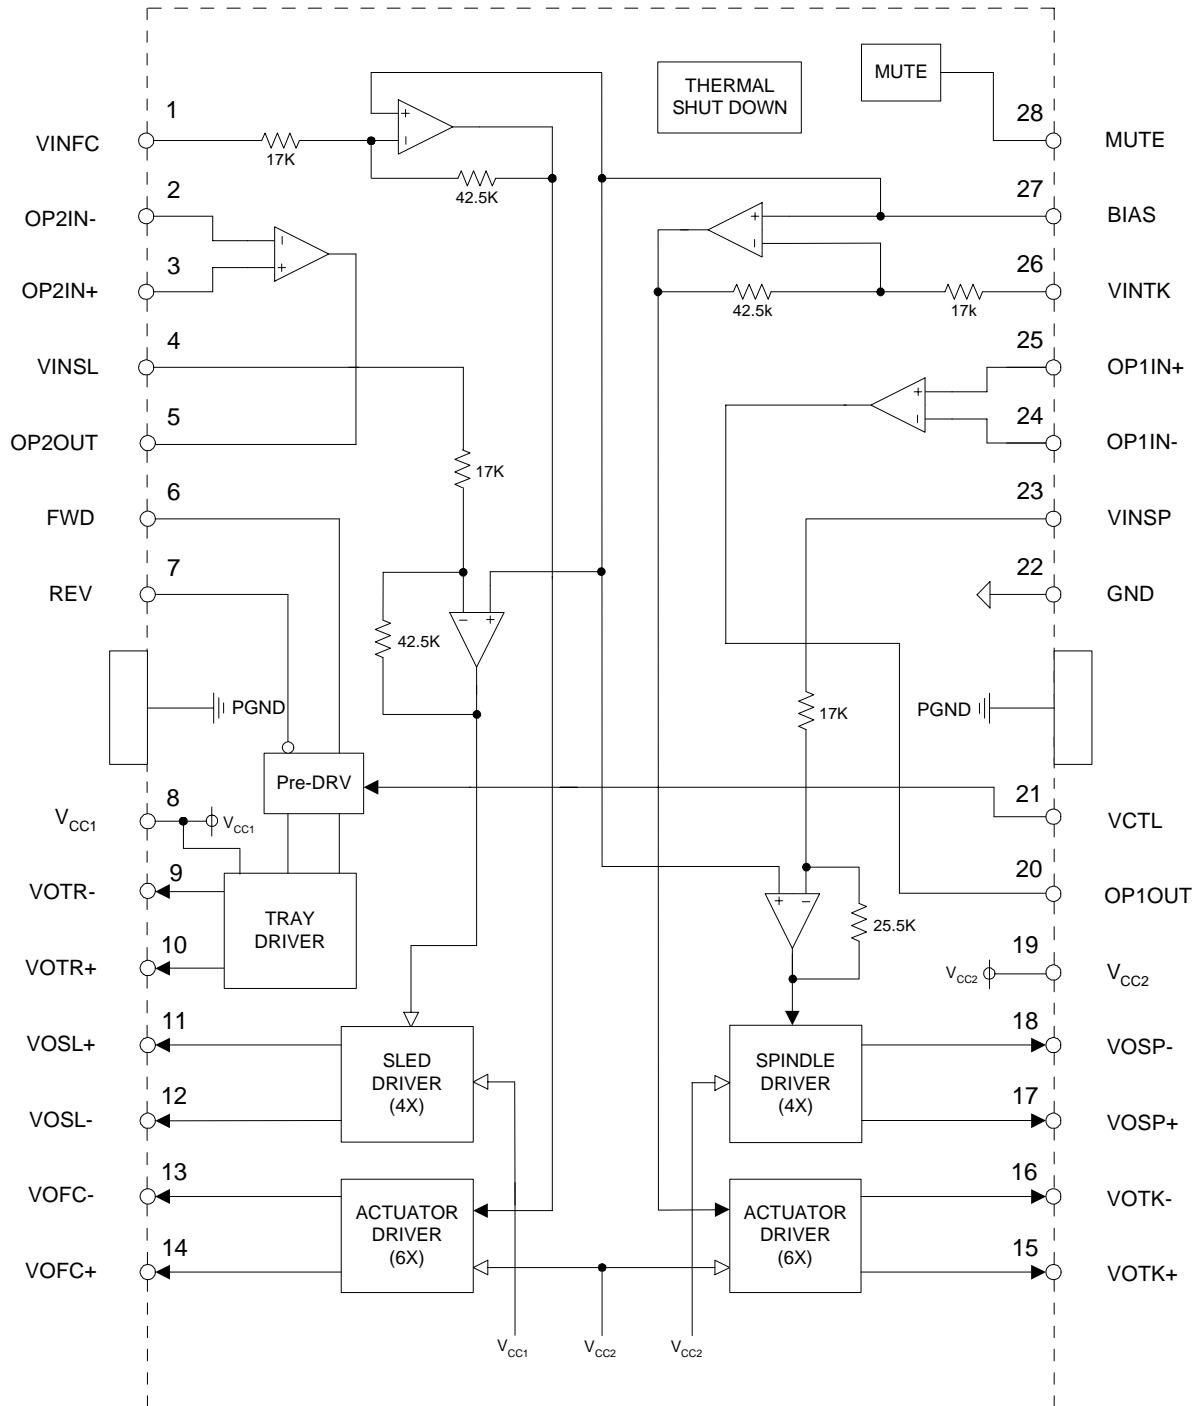
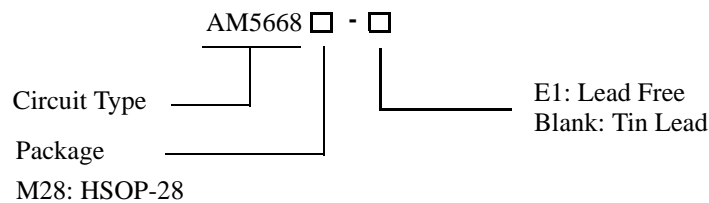


Figure 3. Functional Block Diagram of AM5668

**5-CHANNEL MOTOR DRIVER FOR DVD PLAYER****AM5668****Ordering Information**

| Package | Temperature Range | Part Number | | Marking ID | | Packing Type |
|---------|-------------------|-------------|--------------|------------|--------------|--------------|
| | | Tin Lead | Lead Free | Tin Lead | Lead Free | |
| HSOP-28 | 0 to 70 °C | AM5668M28 | AM5668M28-E1 | AM5668M28 | AM5668M28-E1 | Tube |

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant.

Absolute Maximum Ratings (T_A=25°C) (Note 2)

| Parameter | Symbol | Value | Unit |
|--------------------------------|--------------------|-----------------|------|
| Supply Voltage | V _{CC1,2} | 13.5 | V |
| Power Dissipation | P _D | 1.7 (Note 3, 4) | W |
| Operating Junction Temperature | T _J | 150 | °C |
| Storage Temperature | T _{STG} | -55 to 150 | °C |
| ESD (Human Body Model) | ESD | 2000 | V |
| ESD (Machine Model) | ESD | 200 | V |

Note 2: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Note 3:

- a. When mounted on a 70mm×70mm×1.6mm glass epoxy board.
- b. Reduced by 13.6mW for each increase in T_A of 1°C over 25°C.

Note 4: Do not exceed P_D and SOA and T_J=150°C values.

Recommended Operating Conditions (T_A=25°C)

| Parameter | Symbol | Min | Max | Unit |
|-----------------------|------------------|-------------------------|------|------|
| Supply Voltage | V _{CC1} | 4.3 | 13.2 | V |
| | V _{CC2} | 4.3 to V _{CC1} | | V |
| Operating Temperature | T _A | 0 | 70 | °C |



5-CHANNEL MOTOR DRIVER FOR DVD PLAYER

AM5668

Electrical Characteristics

($T_A=25^\circ\text{C}$, $V_{CC1}=V_{CC2}=5\text{V}$, $V_{BIAS}=2.5\text{V}$, $C_{VCC1}=C_{VCC2}=0.1\mu\text{F}$, unless otherwise specified.)

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|-----------------------------|------------------|---|------|------|-----------|------|
| Quiescent Current | I_{QC} | No load | | 20 | | mA |
| Mute ON Voltage | V_{STON} | | 0 | | 0.5 | V |
| Mute OFF Voltage | V_{STOFF} | | 2.0 | | V_{CC1} | V |
| Focus Driver | | | | | | |
| Output Offset Voltage | V_{OOFFC} | | -50 | | 50 | mV |
| Maximum Output Voltage | V_{OMFC} | at 10Ω load | 3.1 | 3.4 | | V |
| Closed-Loop Voltage Gain | G_{VFC} | $V_{IN}=V_{BIAS} \pm 0.2\text{V}$ | | 23.5 | | dB |
| Tracking Driver | | | | | | |
| Output Offset Voltage | V_{OOFTK} | | -50 | | 50 | mV |
| Maximum Output Voltage | V_{OMTK} | at 10Ω load | 3.1 | 3.4 | | V |
| Closed-Loop Voltage Gain | G_{VTK} | $V_{IN}=V_{BIAS} \pm 0.2\text{V}$ | | 23.5 | | dB |
| Spindle Motor Driver | | | | | | |
| Output Offset Voltage | V_{OOFSP} | | -50 | | 50 | mV |
| Maximum Output Voltage | V_{OMSP} | at 8Ω load | 3.1 | 3.3 | | V |
| Closed-Loop Voltage Gain | G_{VSP} | $V_{IN}=V_{BIAS} \pm 0.2\text{V}$ | 13.3 | 15.5 | 17.5 | dB |
| Gain Error by Polarity | ΔG_{VSP} | $V_{IN}=V_{BIAS} \pm 0.2\text{V}$ | 0 | 1 | 2 | dB |
| Sled Motor Driver | | | | | | |
| Output Offset Voltage | V_{OOFSL} | | -100 | | 100 | mV |
| Maximum Output Voltage | V_{OMSL} | at 8Ω load | 3.1 | 3.3 | | V |
| Closed-Loop Voltage Gain | G_{VSL} | $V_{IN}=V_{BIAS} \pm 0.2\text{V}$ | 18.0 | 20.0 | 22.0 | dB |
| Tray Motor Driver | | | | | | |
| Output Saturation Voltage 1 | V_{SAT1TR} | Upper + Lower saturation, $I_L=200\text{mA}$ | | 1.4 | 1.6 | V |



5-CHANNEL MOTOR DRIVER FOR DVD PLAYER

AM5668

Electrical Characteristics (Continued)

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---|---------------------|---|-----|-----|-------------------|---------|
| Output Saturation Voltage between FWD and REV | ΔV_{SAT1TR} | Output Saturation Voltage 1 between FWD and REV | | | 0.1 | V |
| Output Saturation Voltage 2 | V_{SAT2TR} | Upper + Lower saturation, $I_L=500mA$ | | 2.3 | 2.5 | V |
| Output Adjustable Gain on "H" Side Voltage | G_{VTRH} | "H" side output for input ($V_{CTL}=1V$) | 7.4 | 9.2 | 11 | dB |
| Tray Motor Driver Input Logic | | | | | | |
| High Level Input Voltage | V_{IH} | | 2.0 | | V_{CC1} | V |
| Low Level Input Voltage | V_{IL} | | 0 | | 0.8 | V |
| High Level Input Current | I_{IH} | $V_{FWD}=V_{REV}=5V$ | | 180 | 270 | μA |
| Comparator | | | | | | |
| Input Offset Voltage | V_{IO} | | | 3 | | mV |
| Input Common-Mode Voltage Range | V_{CM} | | 0 | | V_{CC1} -1.5 | V |
| Voltage Gain | G_V | $R_L \geq 15k\Omega$ | 80 | | | dB |
| Output Sink Current | I_{SINK} | $V_{OUT} < 1.5V$ | | 6.0 | | mA |
| Saturation Voltage | V_{SAT} | $I_{SINK} \leq 2mA$ | | 250 | 500 | mV |



5-CHANNEL MOTOR DRIVER FOR DVD PLAYER

AM5668

Test Circuit

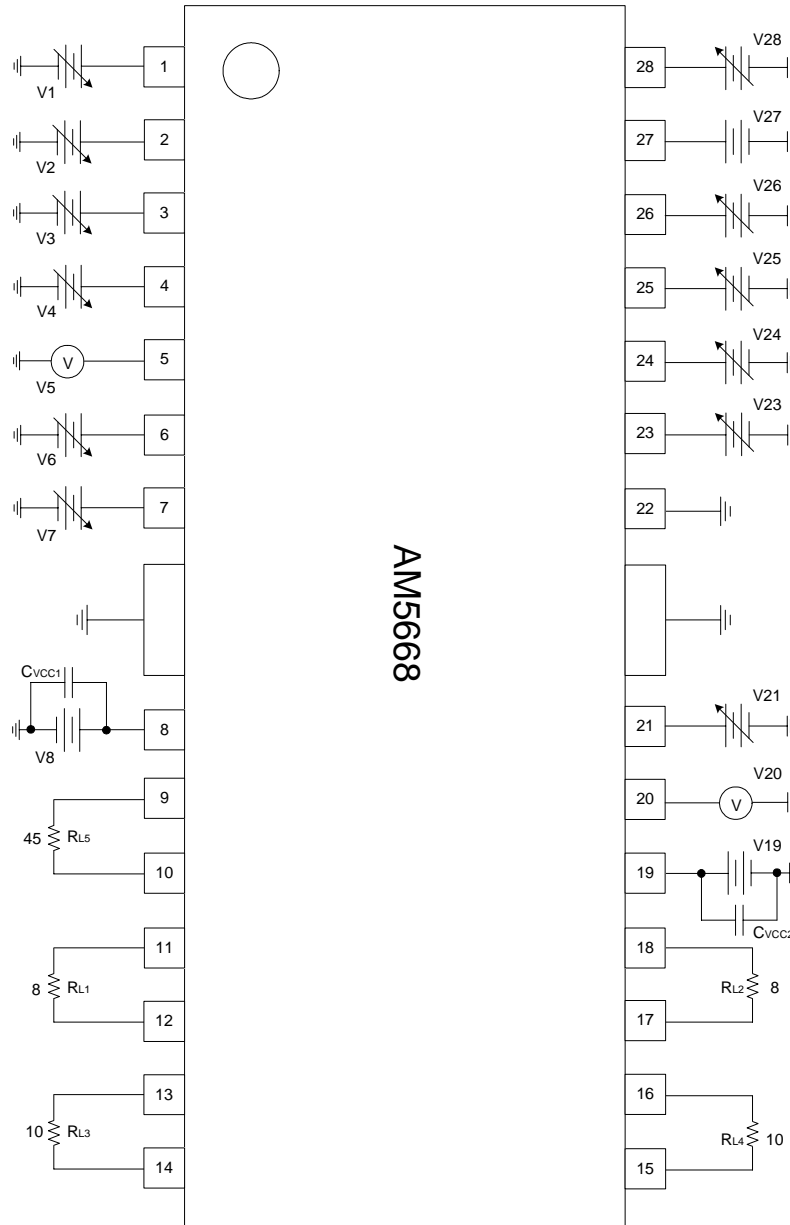


Figure 4. Test Circuit of AM5668



5-CHANNEL MOTOR DRIVER FOR DVD PLAYER

AM5668

Typical Performance Characteristics

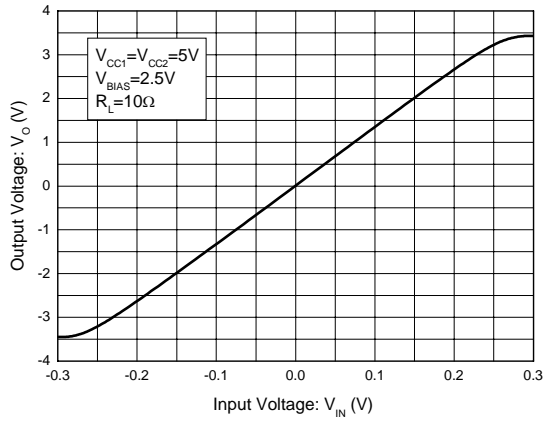


Figure 5. Focus Driver Characteristics (Note 5)

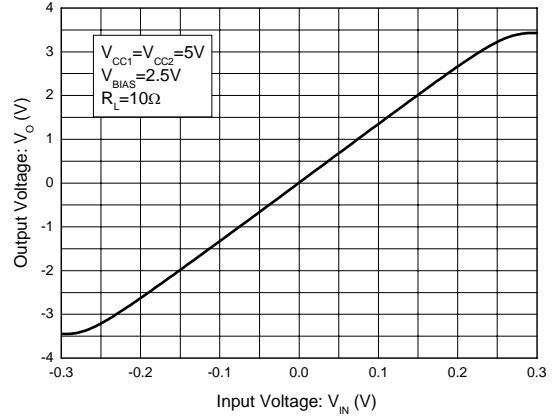


Figure 6. Tracking Driver Characteristics (Note 5)

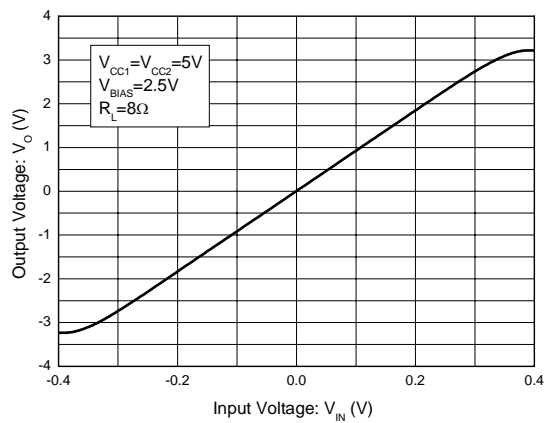


Figure 7. Sled Driver Characteristics (Note 5)

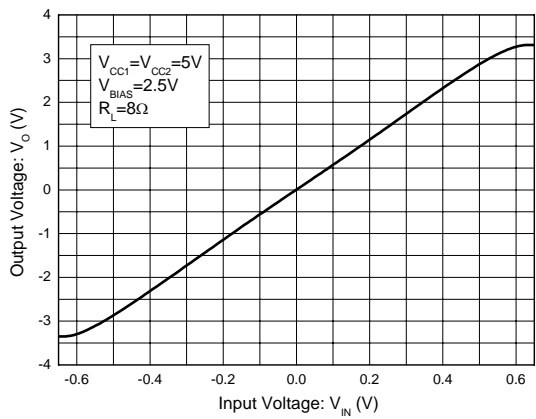


Figure 8. Spindle Driver Characteristics (Note 5)

Note 5: Input voltage herein is referenced to Bias pin voltage.



5-CHANNEL MOTOR DRIVER FOR DVD PLAYER

AM5668

Typical Performance Characteristics (Continued)

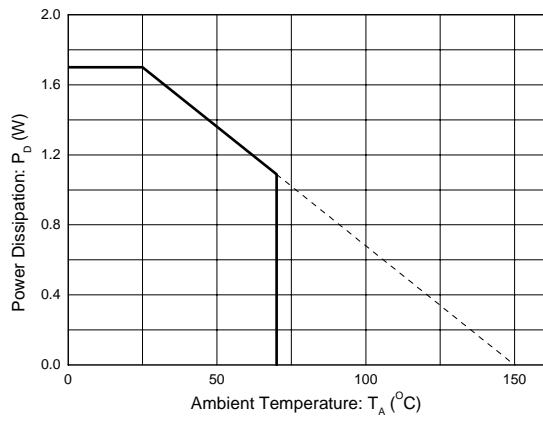


Figure 9. Power Dissipation Curve (Note 3)



5-CHANNEL MOTOR DRIVER FOR DVD PLAYER

AM5668

Typical Application

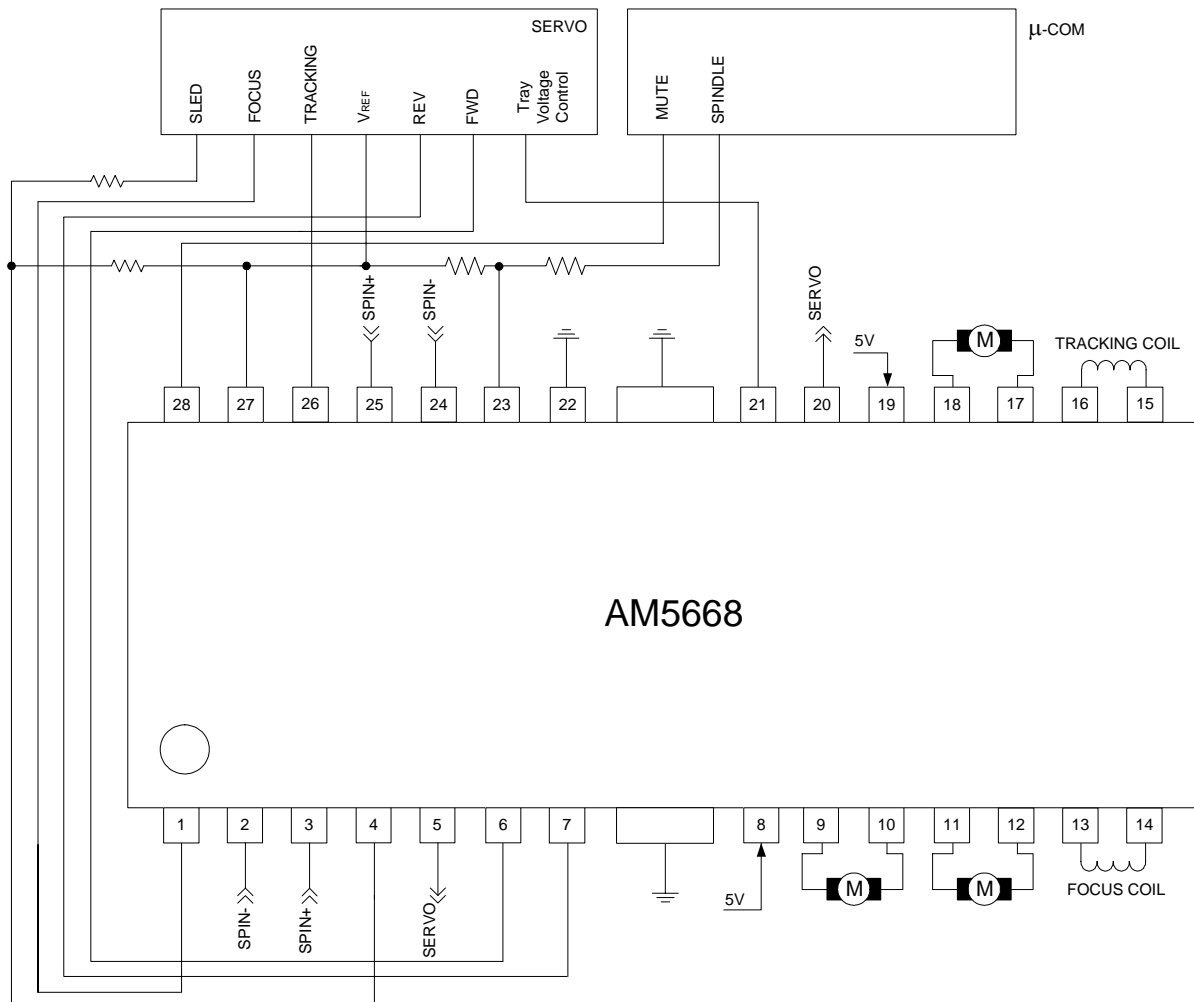


Figure 10. Typical Application of AM5668 in DVD Player

**5-CHANNEL MOTOR DRIVER FOR DVD PLAYER****AM5668****Application Information**

1. The built-in thermal shutdown circuit mutes the output current when the chip temperature reaches 175°C (Typ). The hysteresis is set to 25°C (Typ), so the circuit will start up again when the chip temperature falls to 150°C (Typ).

2. In case mute pin voltage is under 0.5V or this pin is not connected, output current is muted (except for tray motor driver). Mute pin voltage should be more than 2.0V for normal application.

3. Bias pin (pin 27) should be pulled up to more than 1.2V. In case the bias pin voltage is pulled down below 0.9V (Typ), the output current is muted.

4. Insert the bypass capacitor (about 0.1μF) between V_{CC} pin and GND pin as close as possible to this chip.

5. Heat dissipation fins are attached to the GND on the inside of the package. Make sure to connect them to the external GND.

6. Tray driver logic input:

| FWD (pin6) | REV (pin7) | VOTR+ (pin10) | VOTR- (pin9) | Function |
|------------|------------|---------------|--------------|--------------|
| L | L | OPEN | OPEN | Open mode |
| L | H | L | H | Reverse mode |
| H | L | H | L | Forward mode |
| H | H | L | L | Brake mode |

Input circuit of pins 6 and 7 is designed to avoid simultaneous activation of upper and lower output tray; however, in order to improve reliability, apply motor forward/reverse input once through open mode. We recommend time period for open longer than 10msec.

"H" side output voltage on output pins (VOTR+ or VOTR-) varies depending on output control terminal for tray (pin 21). "H" side output voltage is set to three times (9.2dB Typ) the voltage of VCTL (pin 21). And, "L" side output voltage is equal to output saturation voltage.




5-CHANNEL MOTOR DRIVER FOR DVD PLAYER

AM5668

Mechanical Dimensions

HSOP-28

Unit: mm(inch)

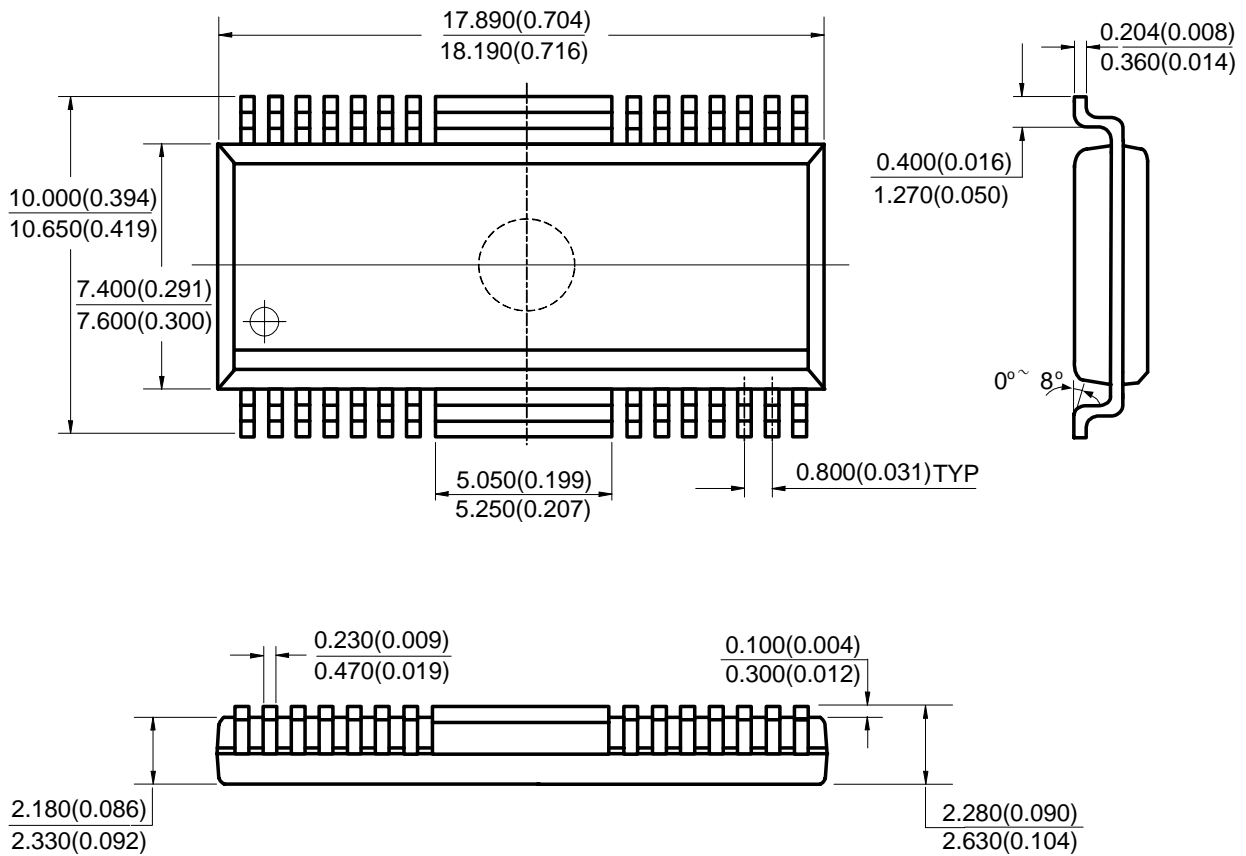



BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

BCD Semiconductor Manufacturing Limited
- Wafer Fab
Shanghai SIM-BCD Semiconductor Manufacturing Limited
800, Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

BCD Semiconductor Manufacturing Limited
- IC Design Group
Advanced Analog Circuits (Shanghai) Corporation
8F, Zone B, 900, Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6495 9539, Fax: +86-21-6485 9673

REGIONAL SALES OFFICE

Shenzhen Office
Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd. Shenzhen Office
Advanced Analog Circuits (Shanghai) Corporation Shenzhen Office
Room E, 5F, Noble Center, No.1006, 3rd Fuzhong Road, Futian District, Shenzhen 518026, China
Tel: +86-755-8826 7951
Fax: +86-755-8826 7865

Taiwan Office
BCD Semiconductor (Taiwan) Company Limited
4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei,
Taiwan
Tel: +886-2-2656 2808
Fax: +886-2-2656 2806

USA Office
BCD Semiconductor Corporation
30920 Huntwood Ave. Hayward,
CA 94544, U.S.A
Tel : +1-510-324-2988
Fax: +1-510-324-2788