

■ General Description

The AME8827 family of positive, CMOS linear regulators and provide low dropout voltage (340mV @ 1A) and excellent PSRR, thus making them ideal for power-saving systems. These rugged devices have both Thermal Shutdown, and Current limit to prevent device failure under the "Worst" of operating conditions.

The AME8827 is stable with an output capacitance of 4.7 μ F or larger.

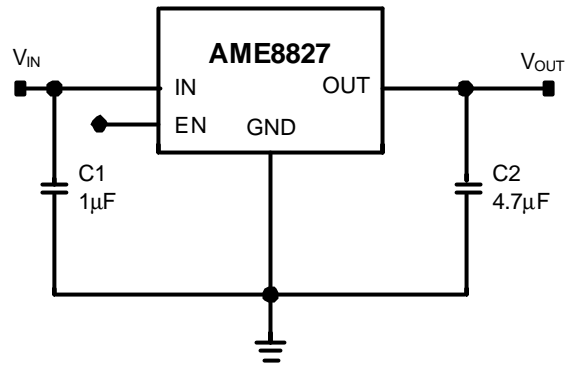
■ Features

- Low Dropout Voltage:340mV @ 1A
- Guaranteed 1A Drive current
- Over-Temperature Shutdown
- Current Limiting protection
- Excellent PSRR : 60dB(typ.)
- Factory Pre-set Output Voltages
- Low Temperature Coefficient
- Input Voltage Range (2.5V - 5.5V)
- Output Voltage Range (1.2V - 3.6V)
- All AME's Green Products Meet RoHS Standards

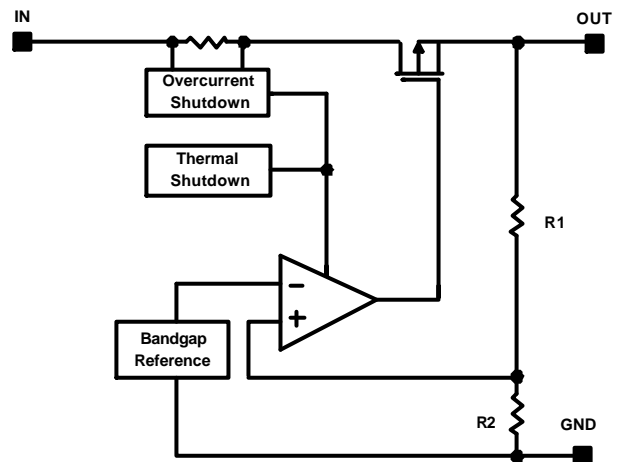
■ Applications

- Motherboard, Desktop, and Computer Peripherals
- LCD monitor
- Handheld Device
- Data-communication

■ Typical Application



■ Function Block Diagram




■ Pin Configuration


AME8827-AGTxxx

1. IN
2. GND (TAB)
3. OUT

**Die Attach:
Conductive Epoxy**



AME8827-ACSxxx

1. IN
2. GND (TAB)
3. OUT

**Die Attach:
Conductive Epoxy**



AME8827-BGTxxx

1. GND
2. OUT (TAB)
3. IN

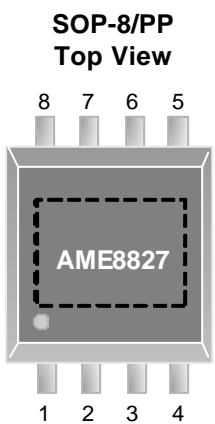
**Die Attach:
Non-Conductive Epoxy**



AME8827-AHAxxx

1. EN
2. IN
3. OUT
4. NC
5. GND
6. GND
7. GND
8. GND

**Die Attach:
Conductive Epoxy**



AME8827-BZAxxx

1. EN
2. IN
3. OUT
4. NC
5. GND
6. GND
7. GND
8. GND

**Die Attach:
Conductive Epoxy**

Note: The area enclosed by dashed line represents Exposed Pad and connect to GND.

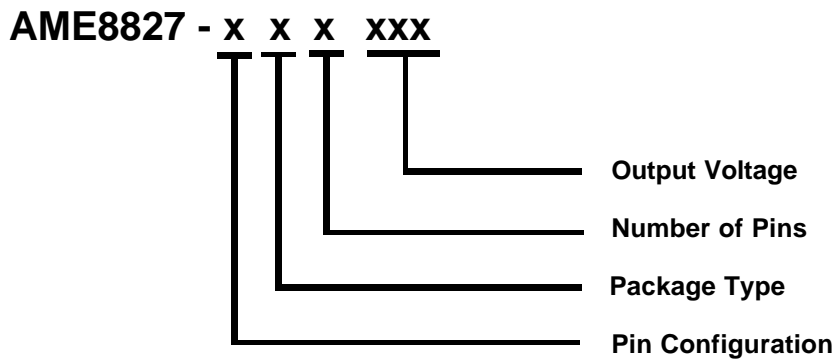


AME8827

Low Dropout 1A CMOS Regulator

■ **Pin Description**

Pin Name	Pin Description
IN	Input voltage pin; should be decoupled with 1 μ F or greater capacitor.
GND	Ground connection pin.
OUT	LDO voltage regulator output pin; should be decoupled with a 4.7 μ F or greater value low ESR ceramic capacitor.
EN	Enable pin. When pulled low, the PMOS pass transistor turns off, current consuming less than 10 μ A.
NC	No connection.

■ Ordering Information


Pin Configuration	Package Type	Number of Pins	Output Voltage
A 1. IN <small>(SOT-223)</small> 2. GND 3. OUT	G: SOT-223 C: TO-252 H: SOP Z: SOP/PP	T: 3	120: 1.2V
A 1. IN <small>(TO-252-2)</small> 2. GND 3. OUT		S: 2	125: 1.25V
		A: 8	150: 1.5V
			180: 1.8V
			250: 2.5V
B 1. GND <small>(SOT-223)</small> 2. OUT 3. IN			300: 3.0V
			330: 3.3V
A 1. EN <small>(SOP-8)</small> 2. IN 3. OUT 4. NC 5. GND 6. GND 7. GND 8. GND			
B 1. EN <small>(SOP-8/PP)</small> 2. IN 3. OUT 4. NC 5. GND 6. GND 7. GND 8. GND			



AME8827

Low Dropout 1A CMOS Regulator

■ Available Options

Part Number	Marking*	Output Voltage	Package	Operating Ambient Temperature Range
AME8827-AGT120	A8827 AKyMXX	1.2V	SOT-223	-40°C to +85°C
AME8827-AGT180	A8827 AlyMXX	1.8V	SOT-223	-40°C to +85°C
AME8827-AGT250	A8827 AGyMXX	2.5V	SOT-223	-40°C to +85°C
AME8827-AGT330	A8827 AByMXX	3.3V	SOT-223	-40°C to +85°C
AME8827-ACS120	A8827 BKyMXX	1.2V	TO-252-2	-40°C to +85°C
AME8827-ACS125	A8827 BRyMXX	1.25V	TO-252-2	-40°C to +85°C
AME8827-ACS180	A8827 BlyMXX	1.8V	TO-252-2	-40°C to +85°C
AME8827-ACS250	A8827 BGyMXX	2.5V	TO-252-2	-40°C to +85°C
AME8827-ACS330	A8827 BByMXX	3.3V	TO-252-2	-40°C to +85°C
AME8827-BGT120	A8827 EKyMXX	1.2V	SOT-223	-40°C to +85°C
AME8827-BGT150	A8827 EJyMXX	1.5V	SOT-223	-40°C to +85°C
AME8827-BGT180	A8827 ElyMXX	1.8V	SOT-223	-40°C to +85°C
AME8827-BGT250	A8827 EGyMXX	2.5V	SOT-223	-40°C to +85°C
AME8827-BGT330	A8827 EByMXX	3.3V	SOT-223	-40°C to +85°C
AME8827-AHA330	A8827 FByMXX	3.3V	SOP-8	-40°C to +85°C
AME8827-BZA330	A8827 GByMXX	3.3V	SOP-8/PP	-40°C to +85°C

Note:

1. The first 2 places represent product code. It is assigned by AME such as AK.
2. y is year code and is the last number of a year. Such as the year code of 2008 is 8.
3. A bar on top of first letter represents Green Part such as \bar{A} 8827.
4. The last 3 places MXX represent Marking Code. It contains M as date code in "month", XX as LN code and that is for AME internal use only. Please refer to date code rule section for detail information.
5. Please consult AME sales office or authorized Rep./Distributor for the availability of output voltage and package type.

■ Absolute Maximum Ratings

Parameter	Symbol	Maximum	Unit
Input Voltage	V_{IN}	-0.3 to 6	V
Output Current	I_{OUT}	$P_D/(V_{IN}-V_{OUT})$	mA
Output Voltage	V_{OUT}	GND-0.3 to $V_{IN}+0.3$	V
ESD Classification	B*		

Caution: Stress above the listed absolute maximum rating may cause permanent damage to the device.

* HBM B:2000V~3999V

■ Recommended Operating Conditions

Parameter	Symbol	Rating	Unit
Ambient Temperature Range	T_A	-40 to +85	°C
Junction Temperature Range	T_J	-40 to +125	
Storage Temperature Range	T_{STG}	-65 to +150	

■ Thermal Information

Parameter	Package	Die Attach	Symbol	Maximum	Unit	
Thermal Resistance* (Junction to Case)	SOT-223	Conductive Epoxy	θ_{JC}	25	$^{\circ}\text{C} / \text{W}$	
		Non-Conductive Epoxy		31		
Thermal Resistance (Junction to Ambient)		Conductive Epoxy	θ_{JA}	120		
		Non-Conductive Epoxy		135		
Internal Power Dissipation		Conductive Epoxy	P_D	900	mW	
		Non-Conductive Epoxy		800		
Thermal Resistance* (Junction to Case)		TO-252-2	Conductive Epoxy	θ_{JC}	5	$^{\circ}\text{C} / \text{W}$
Thermal Resistance (Junction to Ambient)				θ_{JA}	90	
Internal Power Dissipation	P_D			1200	mW	
Thermal Resistance** (Junction to Case)	SOP-8	Conductive Epoxy	θ_{JC}	60	$^{\circ}\text{C} / \text{W}$	
Thermal Resistance (Junction to Ambient)			θ_{JA}	150		
Internal Power Dissipation			P_D	810	mW	
Thermal Resistance* (Junction to Case)	SOP-8/PP	Conductive Epoxy	θ_{JC}	19	$^{\circ}\text{C} / \text{W}$	
Thermal Resistance (Junction to Ambient)			θ_{JA}	84		
Internal Power Dissipation			P_D	1450	mW	
Solder Iron (10 Sec)***				350	$^{\circ}\text{C}$	

* Measure θ_{JC} on backside center of tab.

** Measure θ_{JC} on center of molding compound if IC has no tab.

*** MIL-STD-202G 210F

■ Electrical Specifications

$V_{IN} = V_{OUT(NOM)} + 0.5V$, (for $V_{OUT} < 2V$, $V_{IN}=2.5V$), $V_{EN}=V_{IN}$, $I_{OUT}=1mA$, and $C_{OUT} = 4.7\mu F$, $C_{IN}=1\mu F$ unless otherwise noted. Typical values are at $T_A = 25^\circ C$.

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Input Voltage	V_{IN}		(Note 1)		5.5	V
Output Accuracy	$V_{OUT,ACC}$		-2		2	%
Dropout Voltage	V_{DROP}	$I_O=1A, V_{OUT(NOM)} = 2.0V$		(Note2)		mV
		$I_O=1A, 2.0V < V_{OUT(NOM)} < 2.5V$		430	500	
		$I_O=1A, 2.6V < V_{OUT(NOM)} < 3.0V$		380	450	
		$I_O=1A, V_{OUT(NOM)} > 3.1V$		340	400	
Quiescent Current	I_Q	$V_{IN}=5.5V, I_{OUT}=1mA$		70	110	μA
Line Regulation $\frac{\Delta V_{OUT}}{\Delta V_{IN}} \times 100\%$ V_{OUT}	REG _{LINE}	for $V_{OUT} = 2.0$ $2.5V < V_{IN} < 3.5V$	-0.15	0.1	0.15	%V
		for $2.0V < V_{OUT} < 2.8V$ $V_{OUT}+1V < V_{IN} < V_{OUT}+2V$	-0.1	0.02	0.1	
		for $V_{OUT} > 2.8V$ $V_{OUT}+1V < V_{IN} < V_{OUT}+2V$	-0.055	0.02	0.055	
Load Regulation $\frac{\Delta V_{OUT}}{V_{OUT}} \times 100\%$ ΔI_{OUT}	REG _{LOAD}	$V_{IN}=V_{OUT}+1V$ $10mA < I_{LOAD} < 1A$	-0.001	0.0005	0.001	%/mA
Output Current Limit	I_{LIM}	$V_{OUT}=0.9 \times V_{OUT(NOM)}$	1.3	1.5		A
Short Circuit Current	I_{SC}	$V_{IN}=V_{OUT(NOM)}+1V,$ $V_O < 0.6V$		0.6		A
Power Supply Rejection Ratio	PSRR	$C_{OUT}=4.7\mu F, F=1KHz,$ $I_{OUT}=100mA$		60		dB
Enable High (enabled)	$V_{EN(HI)}$	$V_{IN(MIN)} \quad V_{IN} \quad 5.5V$	1.4		V_{IN}	V
Enable Low (shutdown)	$V_{EN(LO)}$	$V_{IN(MIN)} \quad V_{IN} \quad 5.5V$	0		0.4	V
Enable Pin Current (enabled)	I_{EN}	$V_{EN} = V_{IN}$		0.1	1	μA
Shutdown Current	I_{SHDN}	$V_{EN}=0V, V_{IN(MIN)} \quad V_{IN} \quad 5.5V$		5	10	μA



AME8827

Low Dropout 1A CMOS Regulator

■ Electrical Specifications (Contd.)

$V_{IN} = V_{OUT(NOM)} + 0.5V$, (for $V_{OUT} < 2V$, $V_{IN}=2.5V$), $V_{EN}=V_{IN}$, $I_{OUT} = 1mA$, and $C_{OUT} = 4.7\mu F$, $C_{IN}=1\mu F$ unless otherwise noted. Typical values are at $T_A = 25^\circ C$.

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Thermal Shutdown Temperature	T_{SHDN}	Shutdown, temperature increasing		150		°C
		Restore, temperature decreasing		130		

Note 1: $V_{IN(MIN)} = V_{OUT} + V_{DROP}$ or $V_{IN(MIN)} = 2.5V$, whichever is greater.

Note 2: For V_{OUT} below 2.0V, Dropout Voltage is the input_(MIN) to output differential.



AME8827

Low Dropout 1A CMOS Regulator

■ Detailed Description

The AME8827 is low-dropout; low quiescent current linear regulator designed for motherboard, notebook and LCD monitor applications. The output voltage range from 1.2V to 3.6V, and can drive 1A loading current.

Capacitor Selection and Regulator Stability

Use 1 μ F for input capacitor and 4.7 μ F for great for output capacitor on the AME8827. Larger input capacitor value and low ESR provide better supply noise rejection and improve line transient response. To reduce output noise and load transient response, use output capacitor greater than 4.7 μ F.

Calculating the Maximum Output Power

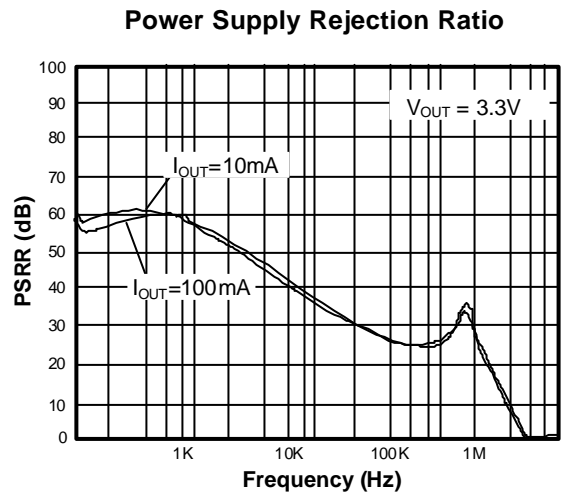
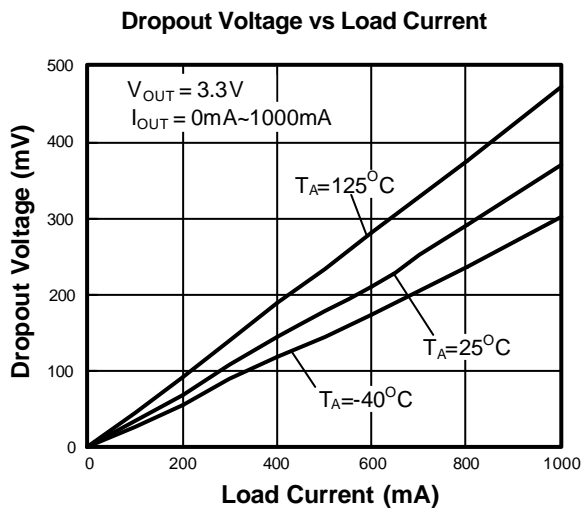
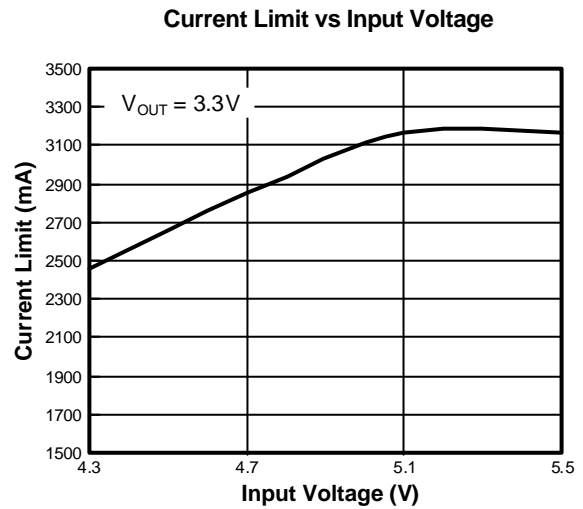
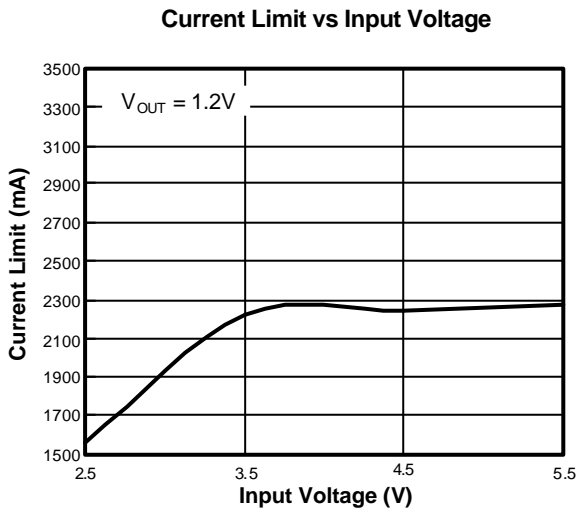
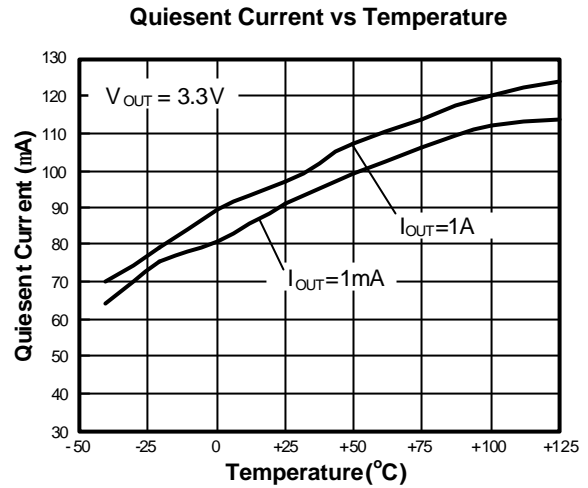
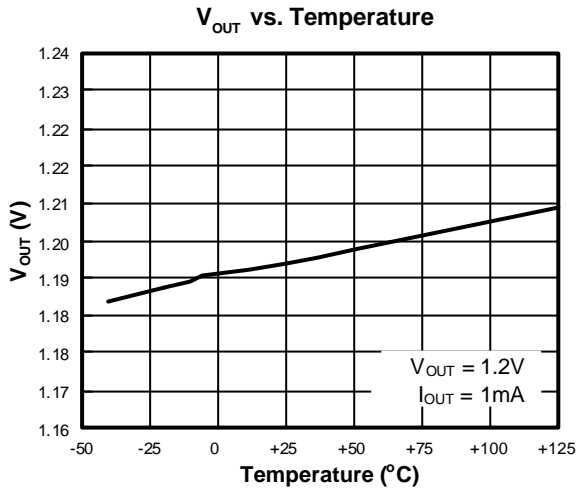
The maximum output power of the AME8827 is limited by the maximum power dissipation of the package. By calculation the power dissipation of the package as a function of the input voltage, output voltage and output current, the maximum input voltage can be obtained. The maximum power dissipation should not exceed the package's maximum power rating.

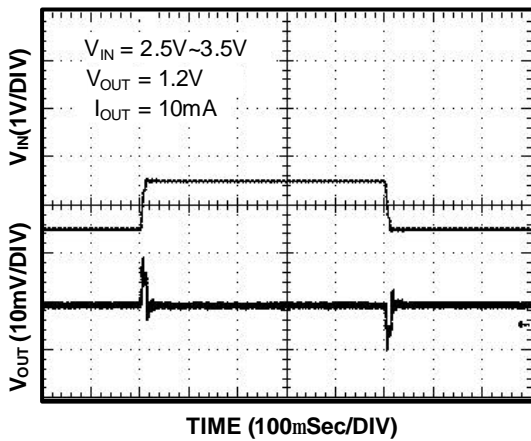
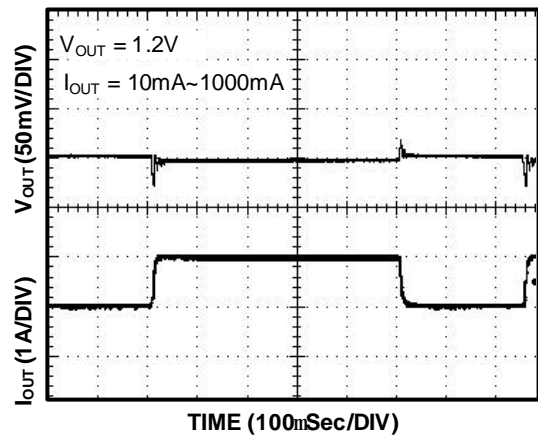
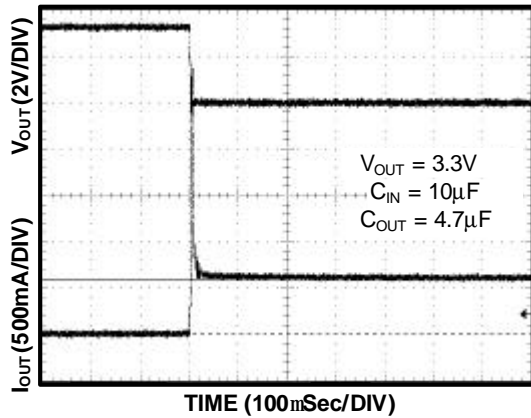
$$P_{MAX} = (V_{IN,MAX} - V_{OUT}) \times I_{OUT}$$

Where:

$V_{IN,MAX}$ = maximum input voltage

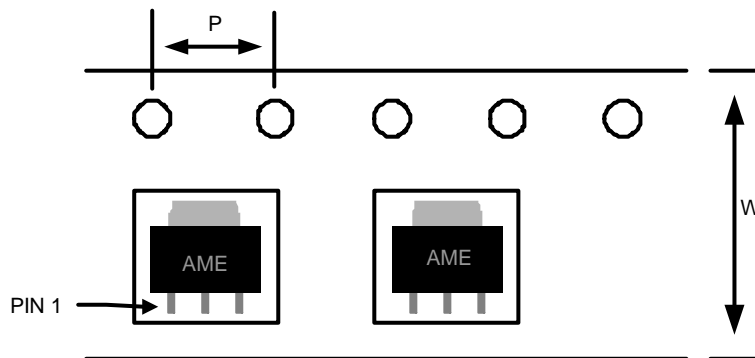
P_{MAX} = maximum power dissipation of the package

■ Characterization Curve(For reference only)


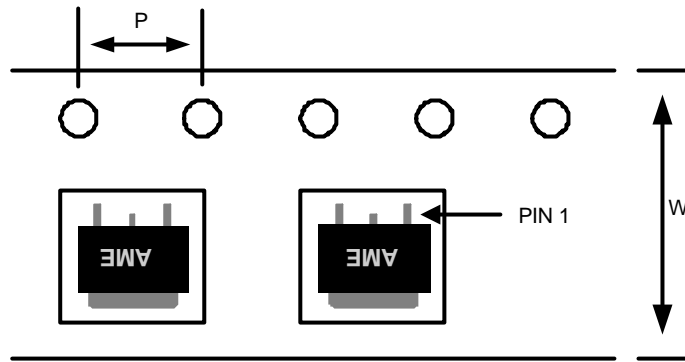
■ Characterization Curve(For reference only)
Line Transient Response

Load Transient Response

Short Circuit Current


■ Date Code Rule

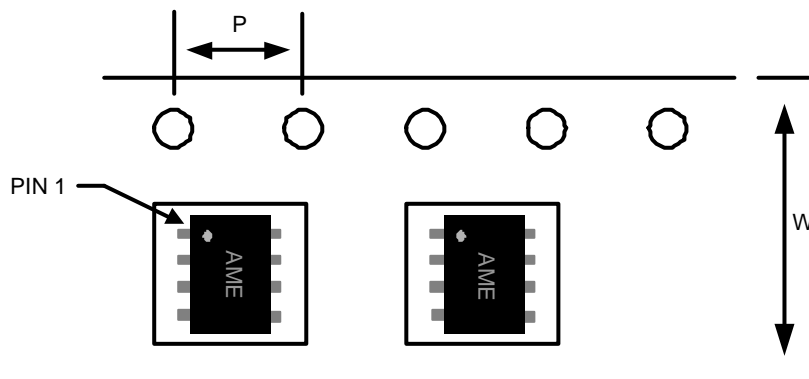
Month Code	
1: January	7: July
2: February	8: August
3: March	9: September
4: April	A: October
5: May	B: November
6: June	C: December

■ Tape & Reel Dimensions
SOT-223

Carrier Tape, Number of Components Per Reel and Reel Size

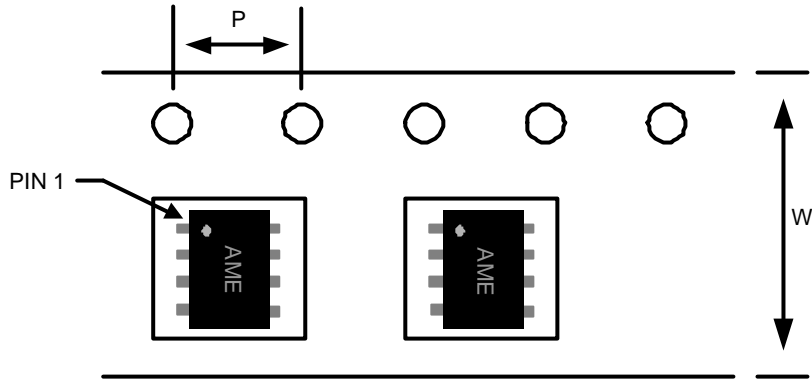
Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-223	12.0±0.1 mm	4.0±0.1 mm	2500pcs	330±1 mm

■ Tape & Reel Dimensions
TO-252-2

Carrier Tape, Number of Components Per Reel and Reel Size

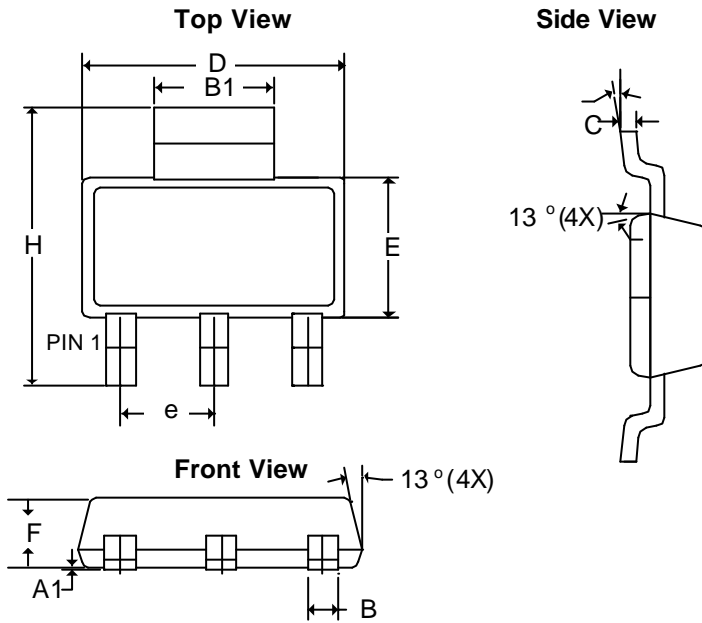
Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
TO-252-2	16.0±0.1 mm	4.0±0.1 mm	2500pcs	330±1 mm

SOP-8

Carrier Tape, Number of Components Per Reel and Reel Size

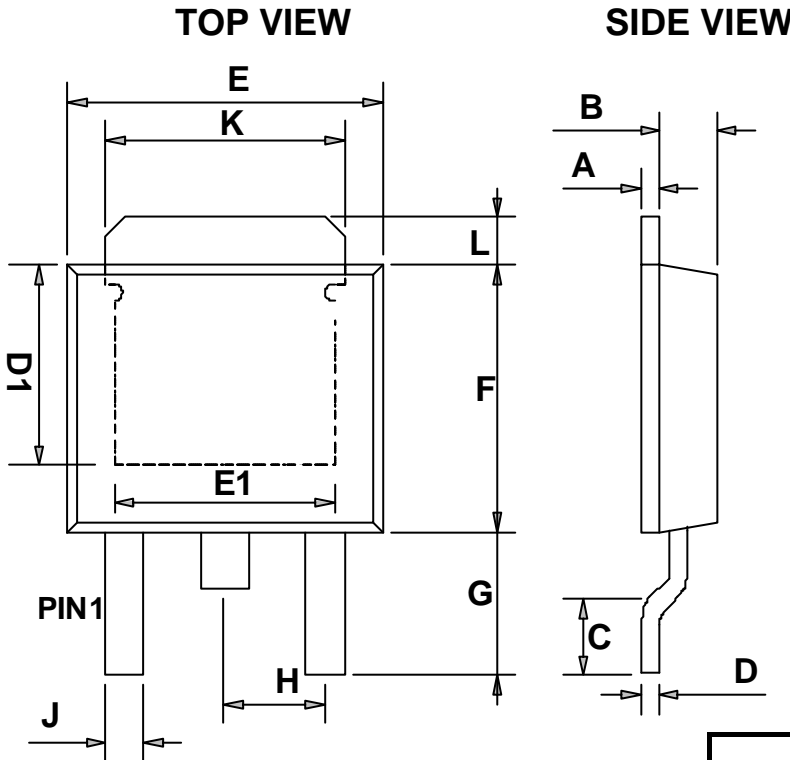
Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOP-8	12.0±0.1 mm	4.0±0.1 mm	2500pcs	330±1 mm

■ Tape & Reel Dimensions
SOP-8/PP

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOP-8/PP	12.0±0.1 mm	4.0±0.1 mm	2500pcs	330±1 mm

■ Package Dimension
SOT-223


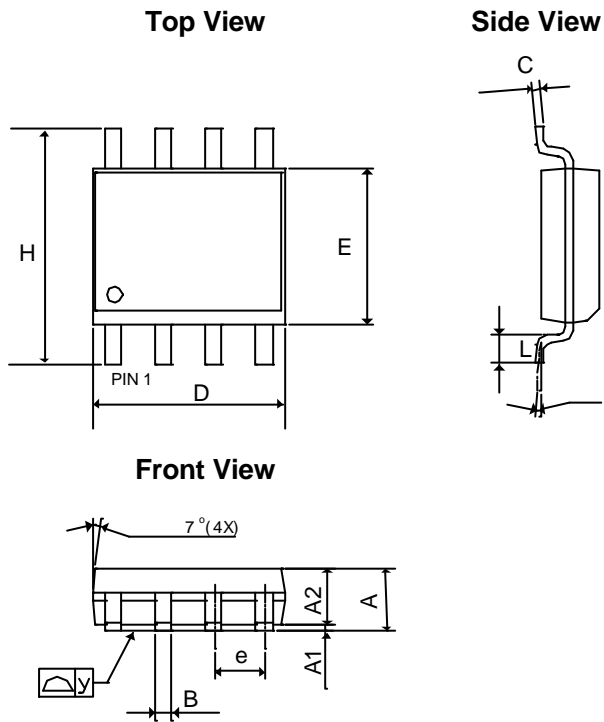
SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A ₁	0.01	0.10	0.0004	0.0039
B	0.60	0.84	0.0236	0.0330
B ₁	2.90	3.15	0.1140	0.1240
C	0.24	0.38	0.0094	0.0150
D	6.20	6.71	0.2441	0.2640
E	3.30	3.71	0.1299	0.1460
e	2.30 BSC		0.0906 BSC	
F	1.40	1.80	0.0551	0.0709
H	6.70	7.30	0.2638	0.2874
q	0°	10°	0°	10°

■ Package Dimension
TO-252-2


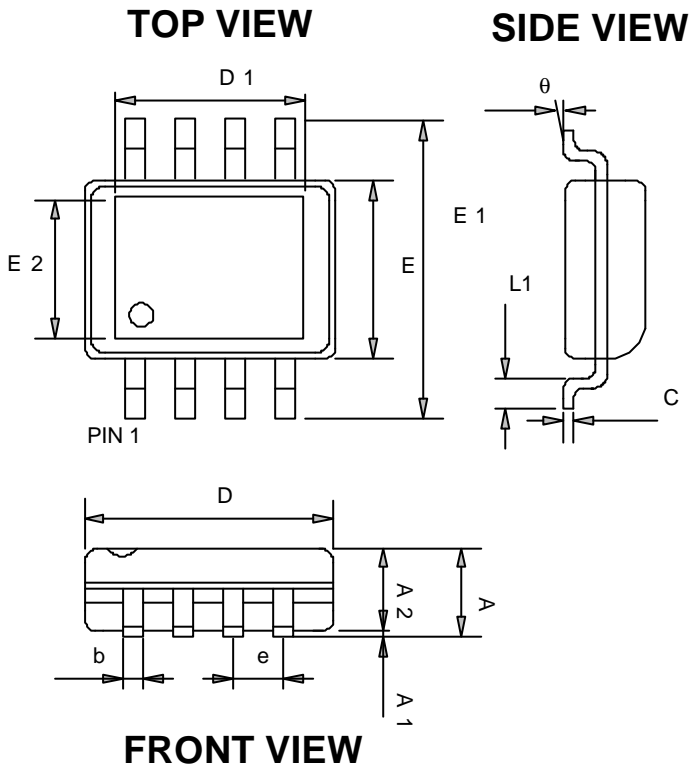
SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.43	0.58	0.0169	0.0230
B	1.60	1.95	0.0630	0.0768
C	0.51	1.78	0.0200	0.0701
D	0.43	0.60	0.0169	0.0236
E	6.35	6.80	0.2500	0.2677
F	5.36	7.20	0.2110	0.2835
G	2.20	3.00	0.0866	0.1181
H		* 2.30		*0.0906
J	0.50	0.97	0.0197	0.0380
K	5.20	5.50	0.2047	0.2165
L	1.35	1.65	0.0531	0.0650
D1	3.80 REF		0.1496 REF	
E1	3.81	5.10	0.1500	0.2008

***: Typical Value**
Notes:

1. Controlling dimension: Millimeters.
2. Maximum lead thickness includes lead finish thickness. Minimum lead thickness is the minimum thickness of base material.

■ Package Dimension
SOP-8


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.35	1.75	0.0531	0.0689
A ₁	0.10	0.30	0.0039	0.0118
A ₂	1.473 REF		0.0580REF	
B	0.33	0.51	0.0130	0.0201
C	0.17	0.25	0.0067	0.0098
D	4.70	5.33	0.1850	0.2098
E	3.80	4.00	0.1496	0.1575
e	1.27 BSC		0.0500 BSC	
L	0.40	1.27	0.0157	0.0500
H	5.80	6.30	0.2283	0.2480
y	-	0.10	-	0.0039
q	0°	8°	0°	8°

■ Package Dimension
SOP-8/PP


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.000	0.150	0.000	0.006
A2	1.350	1.600	0.053	0.063
C	0.100	0.250	0.004	0.010
E	3.750	4.150	0.148	0.163
E1	5.700	6.300	0.224	0.248
L1	0.300	1.270	0.012	0.050
b	0.310	0.510	0.012	0.020
D	4.720	5.120	0.186	0.202
e	1.270 BSC		0.050 BSC	
q	0°	8°	0°	8°
E2	2.150	2.513	0.085	0.099
D1	2.150	3.402	0.085	0.134



www.ame.com.tw
E-Mail: sales@ame.com.tw

Life Support Policy:

These products of AME, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of AME, Inc.

AME, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.

© AME, Inc. , January 2011
Document: 1271-DS8827-A.11

Corporate Headquarter
AME, Inc.

2F, 302 Rui-Guang Road, Nei-Hu District
Taipei 114, Taiwan, R.O.C.
Tel: 886 2 2627-8687
Fax: 886 2 2659-2989