

■ General Description

The AME8853 family of positive, CMOS linear regulators provide low dropout voltage(220mV@300mA), low quiescent current, and low noise CMOS LDO. These rugged devices have both Thermal Shutdown, and Current limit to prevent device failure under the "Worst" of operating conditions.


■ Features

- Low Dropout Voltage: 220mV@300mA
- Guaranteed Current: 300mA
- Quiescent Current: 60 μ A (typ.)
- Over-Temperature Shutdown
- Current Limiting protection
- PSRR: 60dB@10KHz
- Ultra-Low-Noise: 100 μ V_{RMS} at 1Hz to 100KHz
- Low Temperature Coefficient
- Input Voltage Range : 2.5V~5.5V
- Output Voltage Range: 0.8V~ 4.3V
- Green Products Meet RoHS Standards


■ Applications

- Instrumentation
- Portable Electronics
- Wireless Devices
- Cordless Phones
- PC Peripherals
- Battery Powered Widgets


■ Typical Application

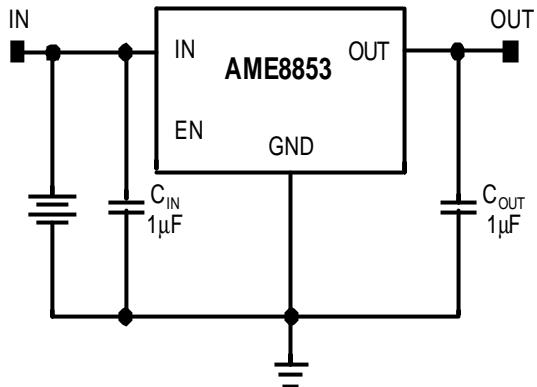

■ Functional Block Diagram

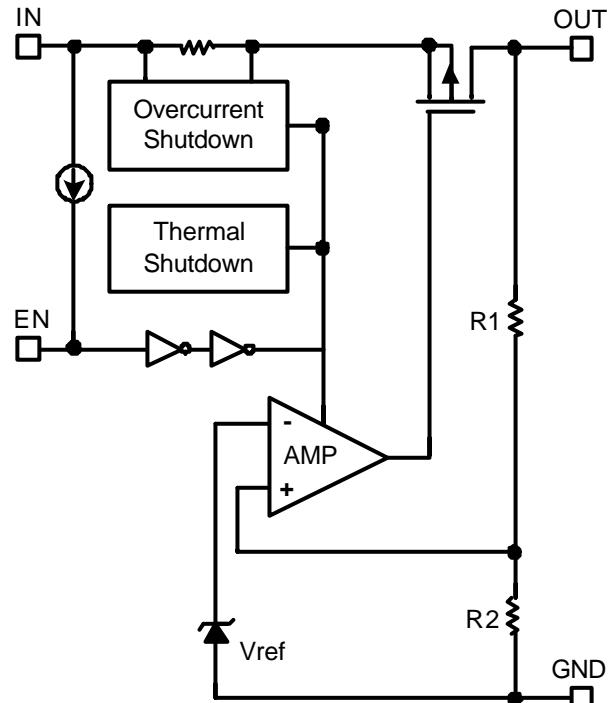

■ Pin Configuration

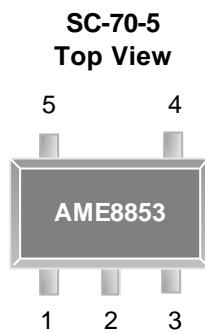


AME8853-AIVxxx

1. IN
2. GND
3. EN
4. NC
5. OUT

* Die Attach:
Conductive Epoxy

**SOT-25/TSOT-25A
Top View**




AME8853-AEVxxxx

1. IN
2. GND
3. EN
4. NC
5. OUT

* Die Attach:
Conductive Epoxy

**SOT-23
Top View**




AME8853-AETxxx

1. GND
2. OUT
3. IN

* Die Attach:
Non-Conductive Epoxy

**SC-70-4 (SC-82)
Top View**



AME8853-AIUxxx

1. EN
2. GND
3. OUT
4. IN

* Die Attach:
Conductive Epoxy



AME

AME8853

High PSRR, Low Noise, 300mA
CMOS Regulator

■ Pin Description

SC-70-5

Pin Number	Pin Name	Pin Description
1	IN	Input voltage pin; should be decoupled with 1µF or greater capacitor.
2	GND	Ground connection pin.
3	EN	Enable pin, Active "high". When pulled "low", the PMOS pass transistor turns off, current consuming less than 1µA. When EN pin float outside, it's weakly pulled high from internal MOS.
4	NC	No connection.
5	OUT	LDO voltage regulator output pin; should be decoupled with a 1.0µF or greater value low ESR ceramic capacitor.

SOT-25/TSOT-25A

Pin Number	Pin Name	Pin Description
1	IN	Input voltage pin; should be decoupled with 1µF or greater capacitor.
2	GND	Ground connection pin.
3	EN	Enable pin, Active "high". When pulled "low", the PMOS pass transistor turns off, current consuming less than 1µA. When EN pin float outside, it's weakly pulled high.
4	NC	No connection.
5	OUT	LDO voltage regulator output pin; should be decoupled with a 1.0µF or greater value low ESR ceramic capacitor.

■ Pin Description (Contd.)

SOT-23


Pin Number	Pin Name	Pin Description
1	GND	Ground connection pin.
2	OUT	LDO voltage regulator output pin; should be decoupled with a 1.0µF or greater value low ESR ceramic capacitor.
3	IN	Input voltage pin; should be decoupled with 1µF or greater capacitor.

SC-70-4(SC-82)

Pin Number	Pin Name	Pin Description
1	EN	Enable pin, Active "high". When pulled "low", the PMOS pass transistor turns off, current consuming less than 1µA. When EN pin float outside, it's weakly pulled high.
2	GND	Ground connection pin.
3	OUT	LDO voltage regulator output pin; should be decoupled with a 1.0µF or greater value low ESR ceramic capacitor.
4	IN	Input voltage pin; should be decoupled with 1µF or greater capacitor.

■ Ordering Information

AME8853 - x x x XXX x

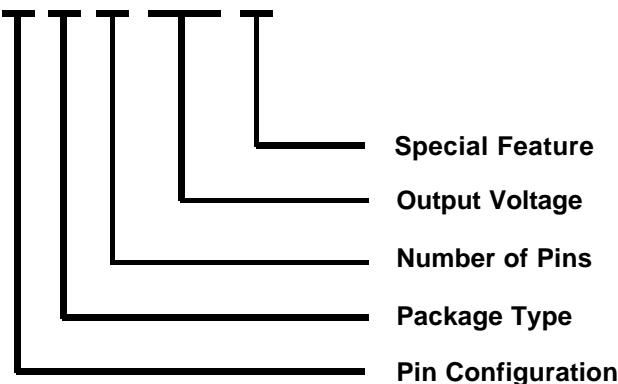

Pin Configuration	Package Type	Number of Pins	Output Voltage	Special Feature
A 1. IN (SC-70-5) 2. GND 3. EN 4. NC 5. OUT	E: SOT-2X I: SC-70 (SC-82)	T: 3 U: 4 V: 5	080: 0.8V 090: 0.9V 100: 1.0V 110: 1.1V 120: 1.2V 130: 1.3V 140: 1.4V 150: 1.5V : : 180: 1.8V : : 250: 2.5V : : 280: 2.8V : : : : 420: 4.2V 430: 4.3V	N/A: SOT-2X K: 0.9mm max height (for TSOT-2XA Only)
A 1. IN (SOT-25) (TSOT-25A) 2. GND 3. EN 4. NC 5. OUT				
A 1. EN (SC-70-4/ SC-82) 2. GND 3. OUT 4. IN				
A 1. GND (SOT-23) 2. OUT 3. IN				

■ Absolute Maximum Ratings

Parameter	Symbol	Maximum	Unit
Input Voltage	V_{IN}	-0.3 to 6	V
EN Voltage	V_{EN}	-0.3 to 6	V
Output Current	I_{OUT}	$P_D/(V_{IN}-V_{OUT})$	mA
Output Voltage	V_{OUT}	GND-0.3 to $V_{IN}+0.3$	V
ESD Classification	HBM	2	kV
	MM	200	V

■ Recommended Operating Conditions

Parameter	Symbol	Rating	Unit
Ambient Temperature Range	T_A	- 40 to +85	°C
Junction Temperaturen Range	T_J	- 40 to +125	°C
Storage Temperaturen Range	T_{STG}	- 65 to +150	°C

■ Thermal Information

Parameter	Package	Die Attach	Symbol	Maximum	Unit	
Thermal Resistance* (Junction to Case)	SC-70-5	Conductive Epoxy	θ_{JC}	224	°C / W	
	SC-70-4(SC-82)			81		
	SOT-25			81		
	TSOT-25A			140		
	SOT-23	Non-Conductive Epoxy				
Thermal Resistance (Junction to Ambient)	SC-70-5	Conductive Epoxy	θ_{JA}	331	°C / W	
	SC-70-4(SC-82)			260		
	SOT-25			230		
	TSOT-25A			280		
	SOT-23	Non-Conductive Epoxy				
Internal Power Dissipation	SC-70-5	Conductive Epoxy	P_D	300	mW	
	SC-70-4(SC-82)			400		
	SOT-25			455		
	TSOT-25A			400		
	SOT-23	Non-Conductive Epoxy				
Maximum Junction Temperature				150	°C	
Lead Temperature (Soldering, 10Sec.)**				260	°C	

* Measure θ_{JC} on backside center of molding compound if IC has no tab.

** MIL-STD-202G 210F

■ Electrical Specifications

$V_{IN} = V_{OUT(NOM)} + 1V$, (for $V_{OUT} < 2V$, $V_{IN} = 2.5V$), $I_{OUT} = 1mA$, and $C_{OUT} = 1\mu F$, $C_{IN} = 1\mu F$ unless otherwise noted.
Typical values are at $T_A = 25^\circ C$.

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Input Voltage	V_{IN}		2.5		5.5	V
Output Accuracy	$V_{OUT,ACC}$	$I_{OUT} = 1mA$	-2.0		2.0	%
Output Voltage Range	V_{OUT}		0.8		4.3	V
Dropout Voltage (Note 1)	V_{DROP}	$I_{OUT} = 300mA$, $0.8V < V_{OUT(NOM)} < 2.0V$			Note2	mV
		$I_{OUT} = 300mA$, $2.0V < V_{OUT(NOM)} < 2.4V$			500	
		$I_{OUT} = 300mA$, $2.4V < V_{OUT(NOM)} < 2.8V$			400	
		$I_{OUT} = 300mA$, $2.8V < V_{OUT(NOM)}$	220		300	
Output Current	I_{OUT}		300			mA
Quiescent Current	I_Q	$I_{OUT} = 0mA$		60	90	μA
Line Regulation $\frac{\Delta V_{OUT} \times 100\%}{\Delta V_{IN}}$	REG_{LINE}	$I_{OUT} = 1mA$, $0.8V < V_{OUT} < 1.2V$, $2.5V < V_{IN} < 3.5V$		0.125	0.25	%/V
		$I_{OUT} = 1mA$, $1.2V < V_{OUT} < 2.0V$, $2.5V < V_{IN} < 3.5V$		0.1	0.2	
		$I_{OUT} = 1mA$, $2.0V < V_{OUT} < 4.2V$, $V_{IN(MIN)} < V_{IN} < V_{IN(MIN)} + 1V$		0.05	0.1	
		$I_{OUT} = 1mA$, $4.2V < V_{OUT} < 4.5V$, $V_{IN(MIN)} < V_{IN} < 5.5V$ (Note2)		0.05	0.1	
Load Regulation $\frac{\Delta V_{OUT} \times 100\%}{V_{OUT}}$	REG_{LOAD}	$1mA < I_{OUT} < 300mA$ $0.8V < V_{OUT(NOM)} < 1.2V$		1.5	3.0	%/A
		$1mA < I_{OUT} < 300mA$ $1.2V < V_{OUT(NOM)} < 2.0V$		1.25	2.5	
		$1mA < I_{OUT} < 300mA$ $2.0V < V_{OUT(NOM)}$		1.0	2	



AME

AME8853

**High PSRR, Low Noise, 300mA
CMOS Regulator**

■ Electrical Specifications (Contd.)

Parameter	Symbol	Test Condition		Min	Typ	Max	Units
Power Supply Rejection Ration	PSRR	$C_{OUT}=1\mu F$, $V_{OUT}=0.8V$ $I_{OUT}=10mA$ $V_{IN}=2.8V$	F=100Hz	60			dB
			F=1KHz	60			
			F=10KHz	60			
Output Voltage Noise	eN	$I_{OUT}=10mA$, $V_{OUT}=0.8V$, f=1Hz to 100KHz		100			μV_{RMS}
Enable High(enabled)	$V_{EN,HI}$	$V_{IN(MIN)}$	V_{IN} 5.5V	1.4		V_{IN}	V
Enable Low (shutdown)	$V_{EN,LO}$	$V_{IN(MIN)}$	V_{IN} 5.5V	0		0.4	
Enable Input Bias Current	$I_{EN,HI}$	$V_{EN} = V_{IN}$				1	μA
	$I_{EN,LO}$	$V_{EN} = 0V$				2	
Shutdown Current	I_{SHDN}	$V_{IN}=5.0V$, $V_{EN}=0V$		0.1	1		μA
Shutdown Output Voltage	$V_{OUT,SD}$	$I_{OUT}=0.4mA$, $V_{EN}=0$				0.4	V
Protection							
Output Current Limit	I_{LIM}	$V_{OUT}=0.9 \times V_{OUT(NOM)}$		400			mA
Thermal Shutdown Temperature	T_{SHDN}	Shutdown, temperature increasing		150			$^{\circ}C$
Thermal Shutdown Hysteresis	$T_{SHDN(HYS)}$			20			

Note1: Dropout Voltage is measured at $V_{OUT}=V_{OUT(NOM)} \times 98\%$

Note2: For V_{OUT} below 2.0V, Dropout Voltage is the input_(MIN) to output differential.

■ Detailed Description

The AME8853 family of CMOS regulators contain a PMOS pass transistor, voltage reference, error amplifier, over-current protection thermal shutdown, and Power Good detection circuitry.

The P-channel pass transistor receives data from the error amplifier, over-current shutdown, and thermal protection circuits. During normal operation, the error amplifier compares the output voltage to a precision reference. Over-current and Thermal shutdown circuits become active when the junction temperature exceeds 150°C, or the current exceeds 300mA. During thermal shutdown, the output voltage remains low. Normal operation is restored when the junction temperature drops more 20°C.

Capacitor Selection and Regulator Stability

The AME8853 is stable with an output capacitor to ground of 1 μ F or greater. Ceramic capacitors have the lowest ESR, and will offer the best AC performance. Conversely, Aluminum Electrolytic capacitors exhibit the highest ESR, resulting in the poorest AC response. Unfortunately, large value ceramic capacitors are comparatively expensive. One option is to parallel a 0.1 μ F ceramic capacitor with a 10 μ F Aluminum Electrolytic. The benefit is low ESR, high capacitance, and low overall cost.

A second capacitor is recommended between the input and ground to stabilize V_{IN}. The input capacitor should be at least 0.1 μ F to have a beneficial effect.

Enable Pin

The Enable Pin is normally pull-high. When activated pulled low, the MOS pass transistor shuts off, and all internal circuits are powered down. In this state, the stand by current is less than 1 μ A.

Capacitor Selection and Regulator Stability

The maximum output power of the AME8853 is limited by the maximum power dissipation of the package. By calculation the power dissipation of the package as a function of the input voltage, output voltage and output current, the maximum input voltage can be obtained. The maximum power dissipation should not exceed the package's maximum power rating.







$$P_{MAX} = (V_{IN(MAX)} - V_{OUT}) \times I_{OUT}$$

Where:

V_{IN(MAX)} = maximum input voltage


P_{MAX} = maximum power dissipation of the package

■ Characterization Curve

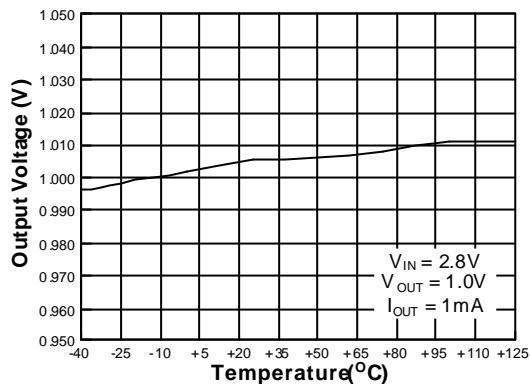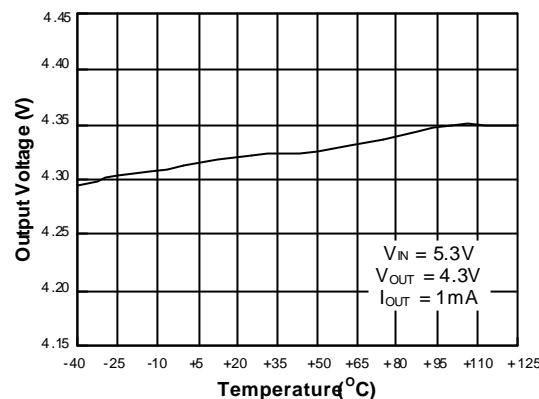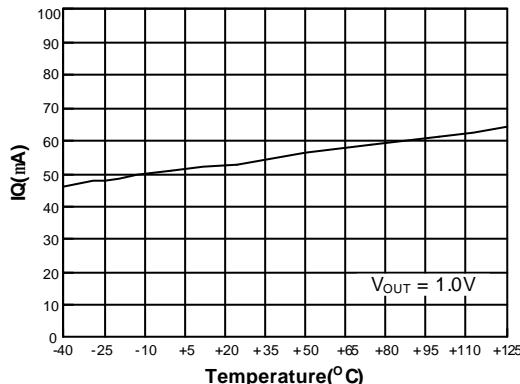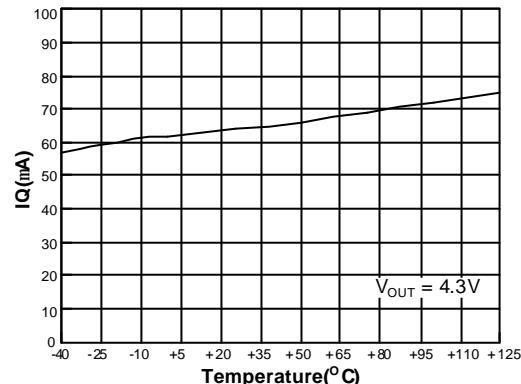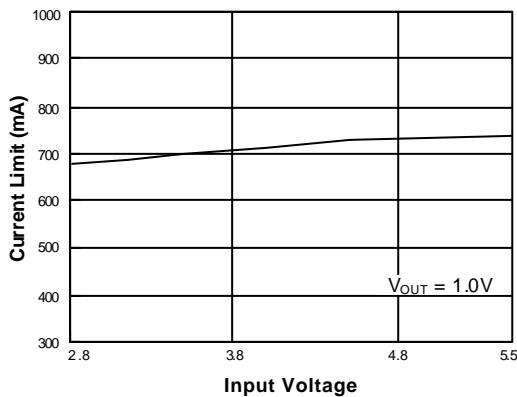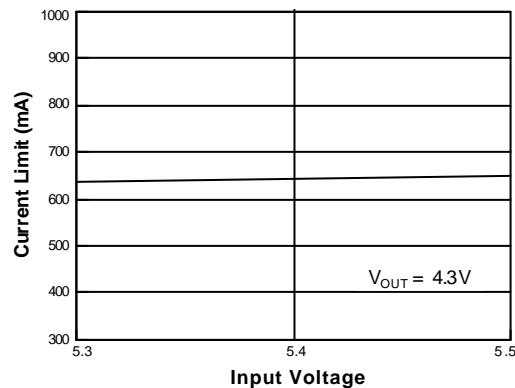
Output Voltage

Output Voltage

Quiescent Current

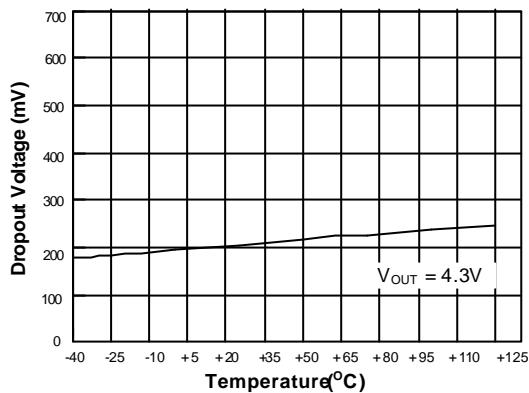Quiescent Current

Current Limit vs. Input Voltage

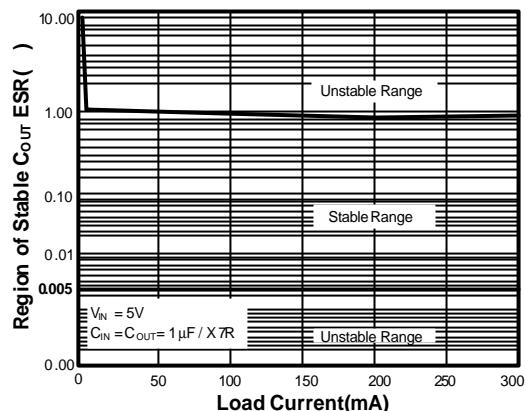Current Limit vs. Input Voltage


■ Characterization Curve (Contd.)


Dropout Voltage




Stability vs. ESR vs. Load Current




PSRR vs. Frequency

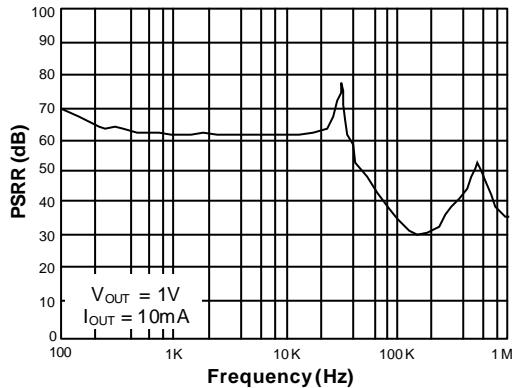


PSRR vs. Frequency

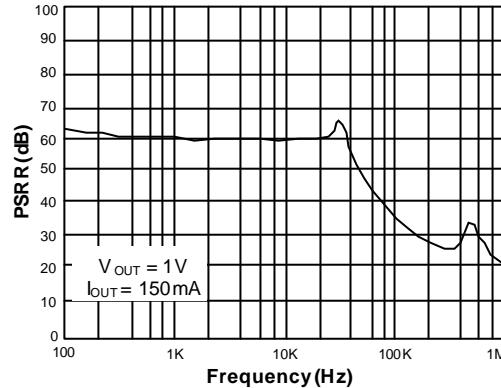

PSRR vs. Frequency

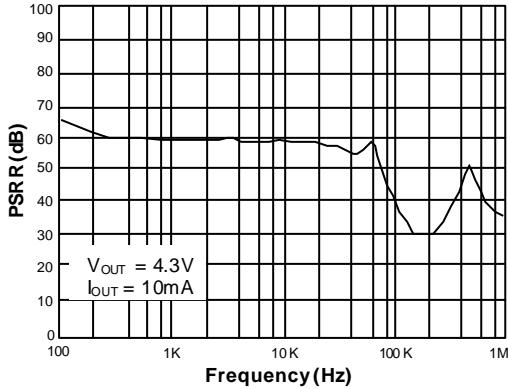


PSRR vs. Frequency

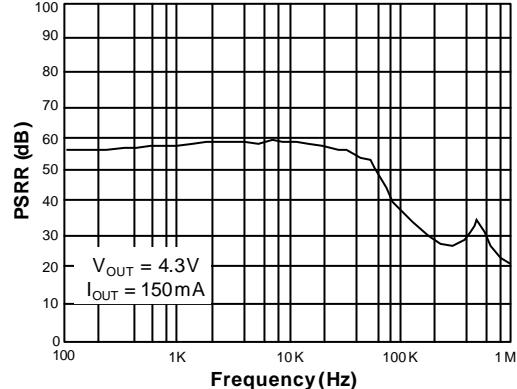


■ Characterization Curve (Contd.)


Line Transient Response

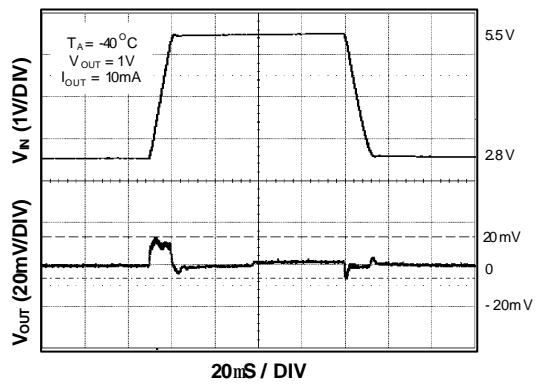


Line Transient Response

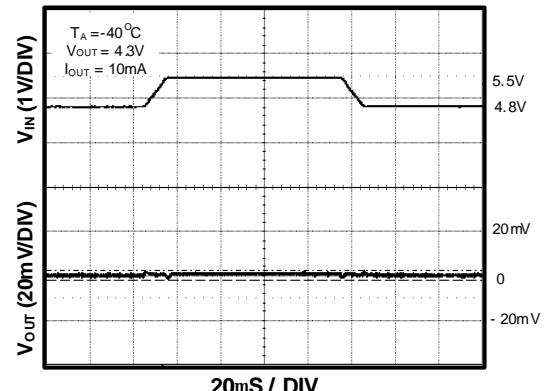


Line Transient Response

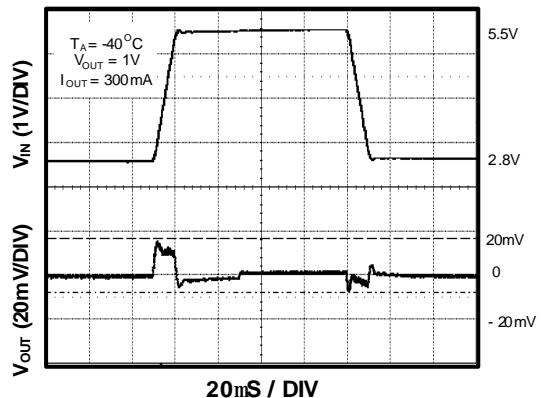


Line Transient Response

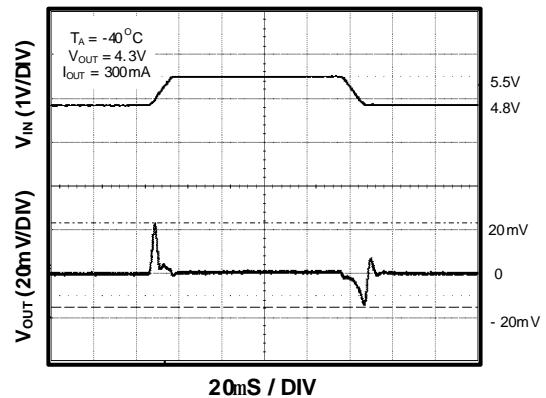

Line Transient Response

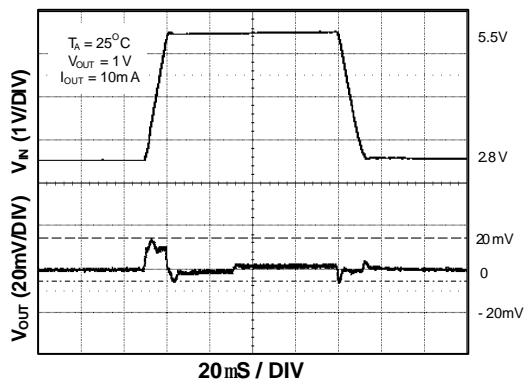


Line Transient Response

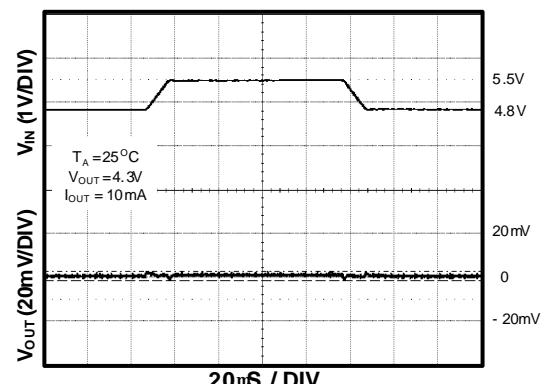


■ Characterization Curve (Contd.)


Line Transient Response

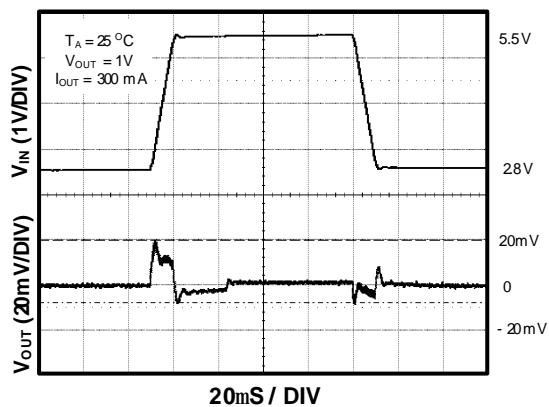


Line Transient Response

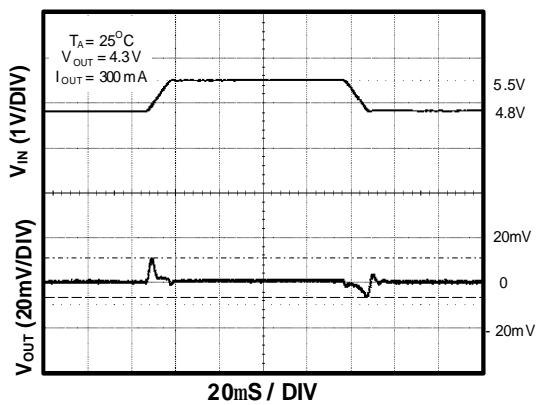


Line Transient Response

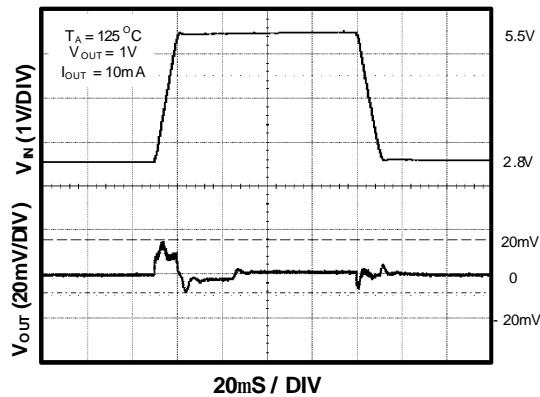


Line Transient Response

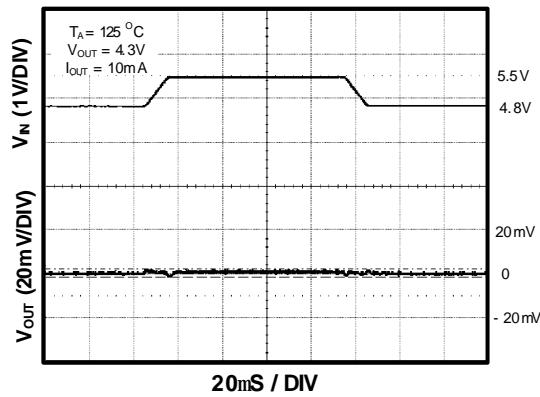

Line Transient Response

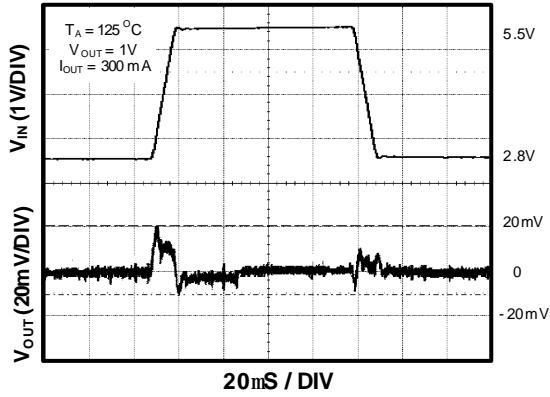


Line Transient Response

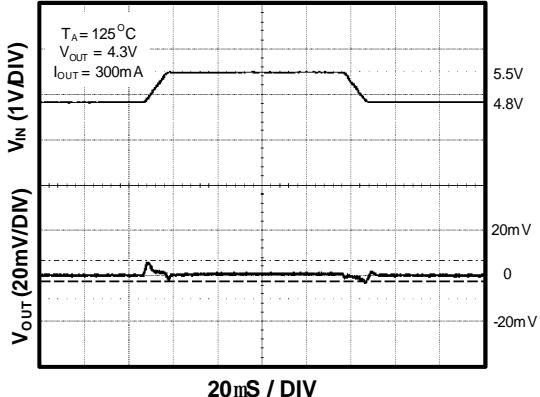


■ Characterization Curve (Contd.)


Load Transient Response

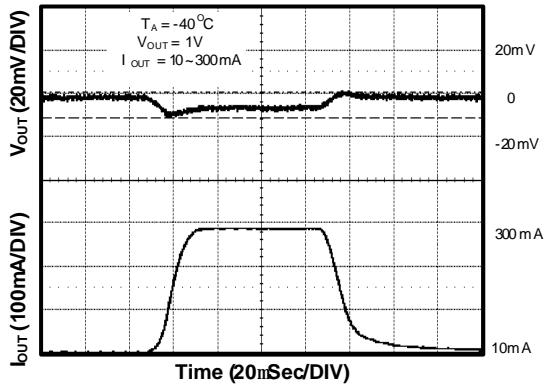


Load Transient Response

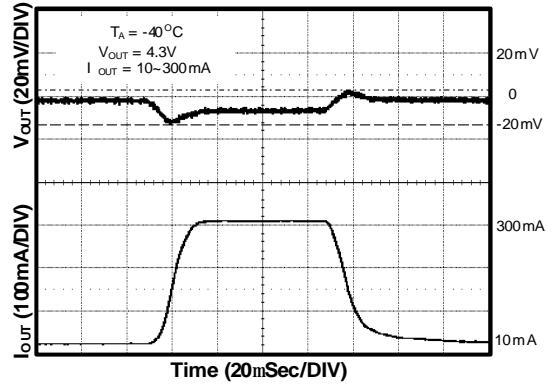


Load Transient Response

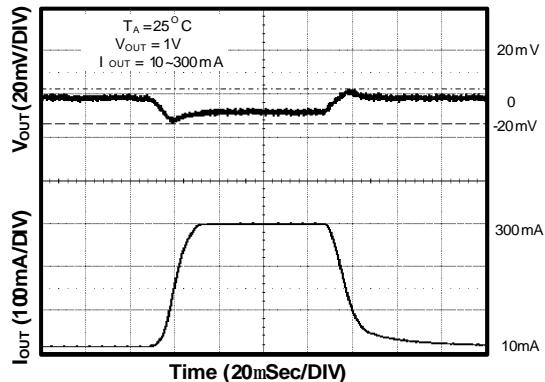


Load Transient Response

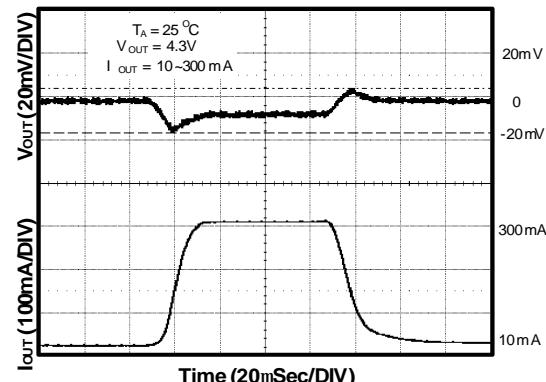

Load Transient Response

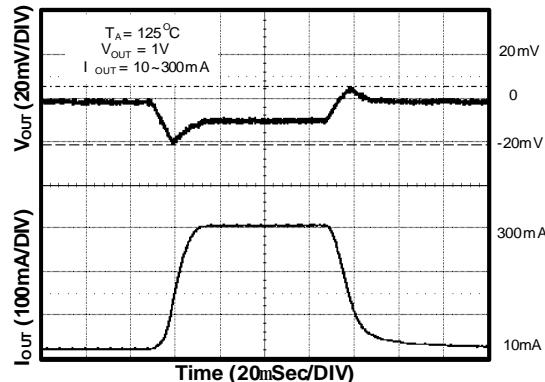


Load Transient Response

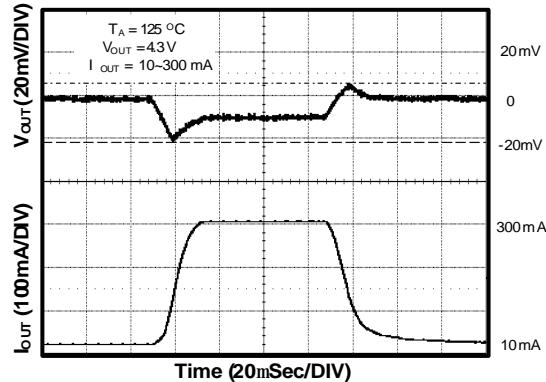


■ Characterization Curve (Contd.)

Chip Enable Transient Response

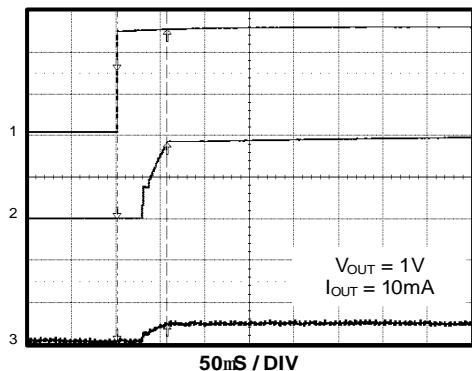


- 1) EN= 1V/div
- 2) V_{OUT} = 500mV/div
- 3) I_{OUT} = 20mA/div

Chip Enable Transient Response

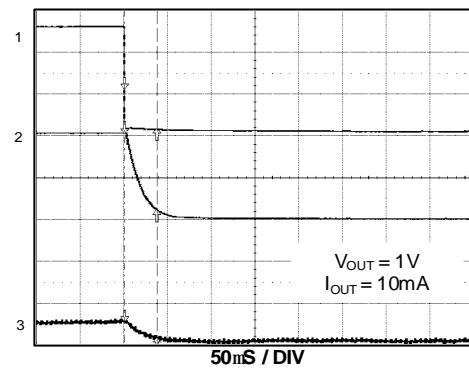


- 1) EN= 1V/div
- 2) V_{OUT} = 500V/div
- 3) I_{OUT} = 20mA/div

Chip Enable Transient Response

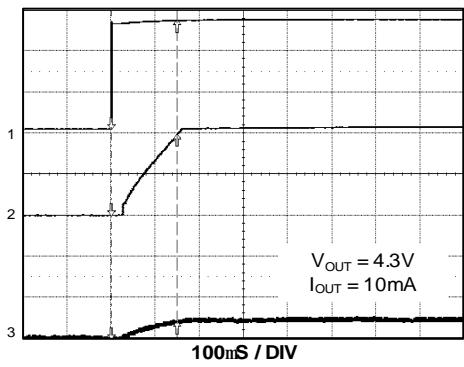

- 1) EN= 2V/div
- 2) V_{OUT} = 2V/div
- 3) I_{OUT} = 20mA/div


Chip Enable Transient Response

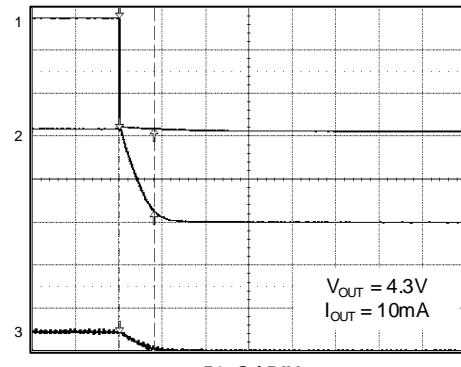

- 1) EN= 2V/div
- 2) V_{OUT} = 2V/div
- 3) I_{OUT} = 20mA/div


■ Characterization Curve (Contd.)

Chip Enable Transient Response

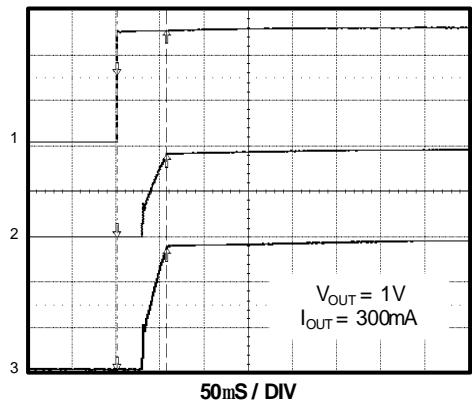


- 1) EN= 1V/div
- 2) $V_{OUT}= 500mV/div$
- 3) $I_{OUT}= 100mA/div$

Chip Enable Transient Response

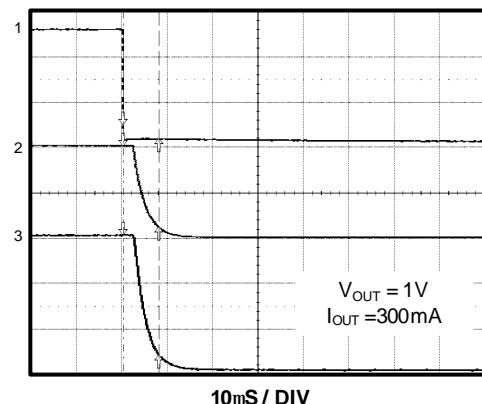


- 1) EN= 1V/div
- 2) $V_{OUT}= 500mV/div$
- 3) $I_{OUT}= 100mA/div$

Chip Enable Transient Response

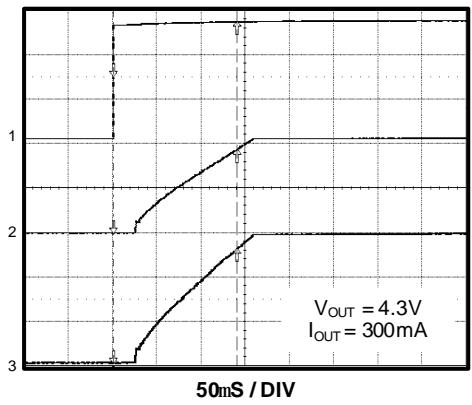

- 1) EN= 2V/div
- 2) $V_{OUT}= 2V/div$
- 3) $I_{OUT}= 100mA/div$


Chip Enable Transient Response

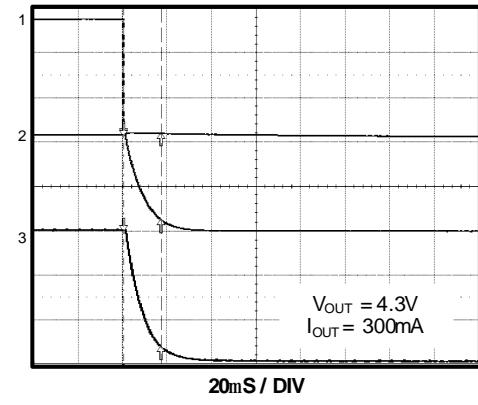

- 1) EN= 2V/div
- 2) $V_{OUT}= 2V/div$
- 3) $I_{OUT}= 100mA/div$

■ Tape and Reel Dimension


SC-70-5

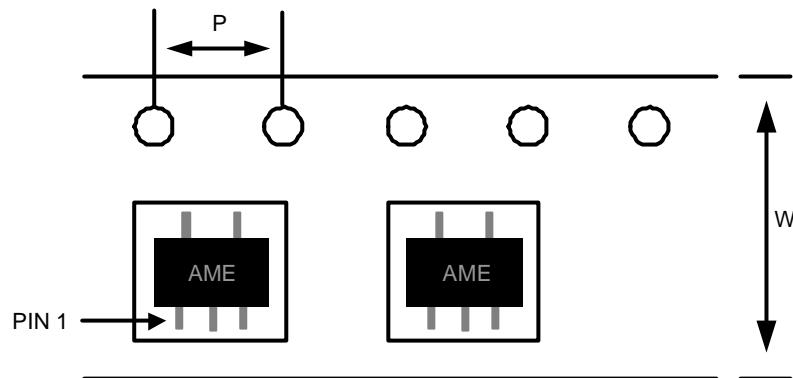

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SC-70-5	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

SOT-25

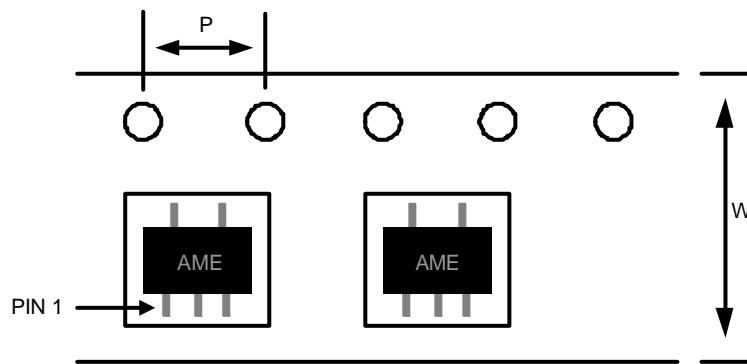


Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-25	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

■ Tape and Reel Dimension (Contd.)


TSOT-25A

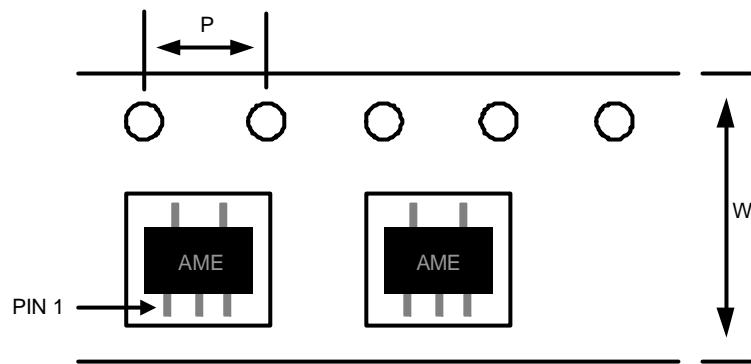

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
TSOT-25A	8.0 ± 0.1 mm	4.0 ± 0.1 mm	3000pcs	180 ± 1 mm

SOT-23

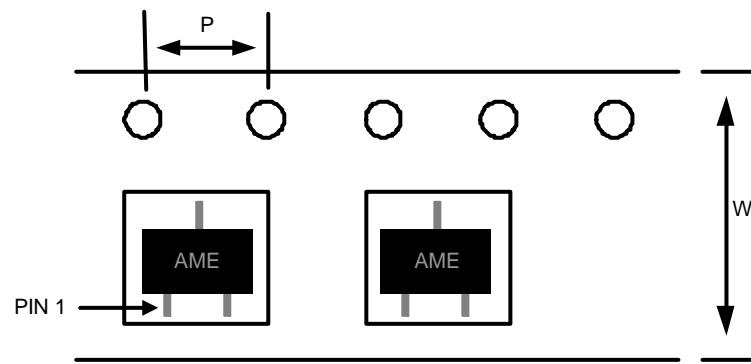


Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-23	8.0 ± 0.1 mm	4.0 ± 0.1 mm	3000pcs	180 ± 1 mm

■ Tape and Reel Dimension (Contd.)

SC-70-4 (SC-82)

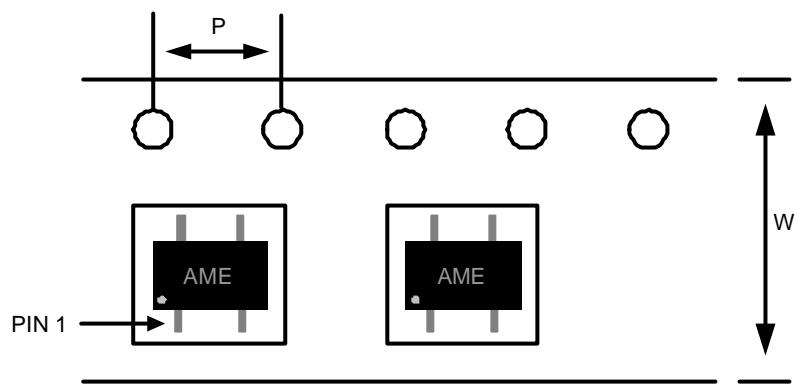


Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SC-70-4	8.0 ± 0.1 mm	4.0 ± 0.1 mm	3000pcs	180 ± 1 mm

■ Package Dimension

SC-70-5

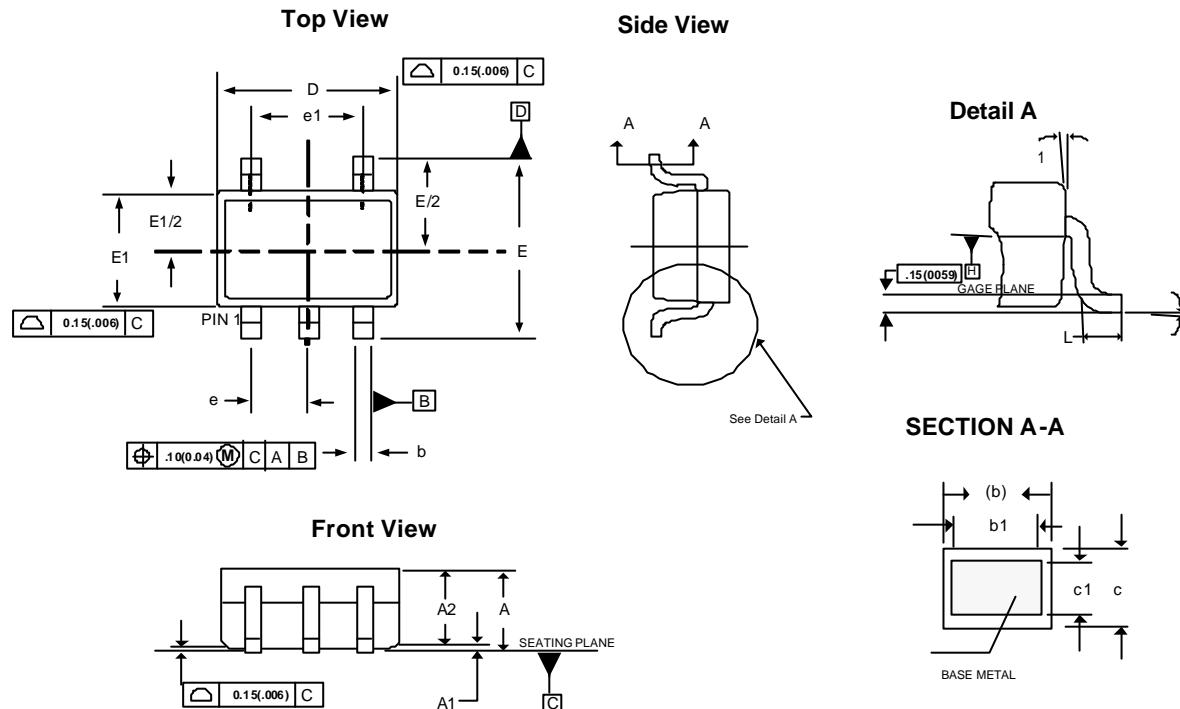

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.80	1.10	0.0315	0.0433
A1	0.00	0.10	0.0000	0.0039
A2	0.80	1.00	0.0315	0.0394
b	0.15	0.35	0.0059	0.0138
b1	0.15	0.25	0.0059	0.0098
c	0.08	0.25	0.0031	0.0098
c1	0.08	0.20	0.0031	0.0079
D	1.85	2.20	0.0728	0.0866
E	1.80	2.45	0.0709	0.0965
E1	1.10	1.40	0.0433	0.0551
e	0.65 BSC		0.0255 BSC	
e1	1.20	1.40	0.0472	0.0551
L	0.26	0.46	0.0102	0.0181
q1	0°	8°	0°	8°
q	4°	10°	4°	10°




AME

AME8853

**High PSRR, Low Noise, 300mA
CMOS Regulator**


■ Package Dimension (Contd.)

SOT-25

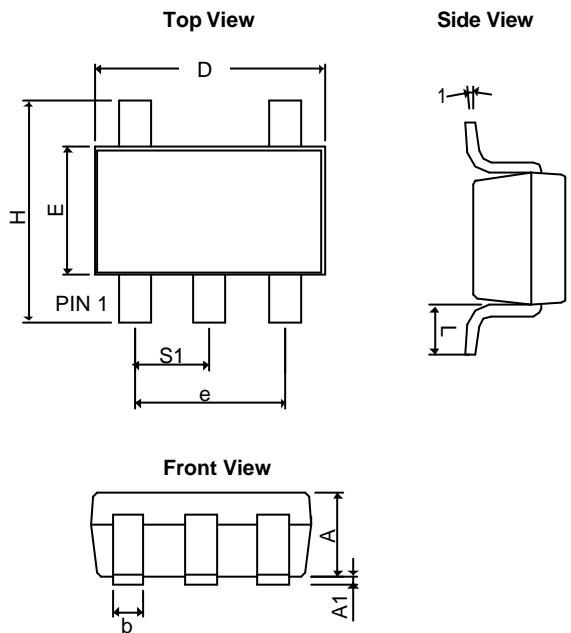

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.90	1.30	0.0354	0.0512
A ₁	0.00	0.15	0.0000	0.0059
b	0.30	0.55	0.0118	0.0217
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.07480 BSC	
H	2.60	3.00	0.10236	0.11811
L	0.37BSC		0.0146BSC	
q ₁	0°	10°	0°	10°
S ₁	0.95BSC		0.0374BSC	

TSOT-25A

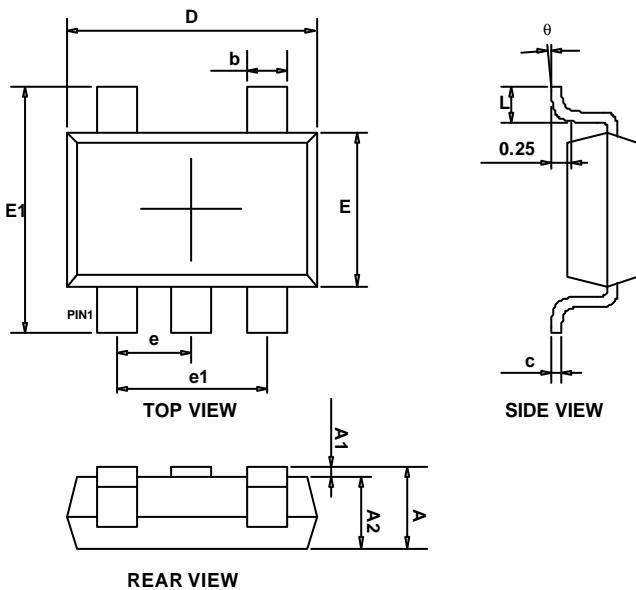

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.700	0.900	0.028	0.035
A ₁	0.000	0.100	0.000	0.004
A ₂	0.700	0.800	0.028	0.031
b	0.350	0.500	0.014	0.020
c	0.080	0.200	0.003	0.008
D	2.820	3.020	0.111	0.119
E	1.600	1.700	0.063	0.067
E ₁	2.650	2.950	0.104	0.116
e	0.95 BSC		0.037 BSC	
e ₁	1.90 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
q	0°	8°	0°	8°




AME

AME8853

**High PSRR, Low Noise, 300mA
CMOS Regulator**


■ Package Dimension (Contd.)

SOT-23

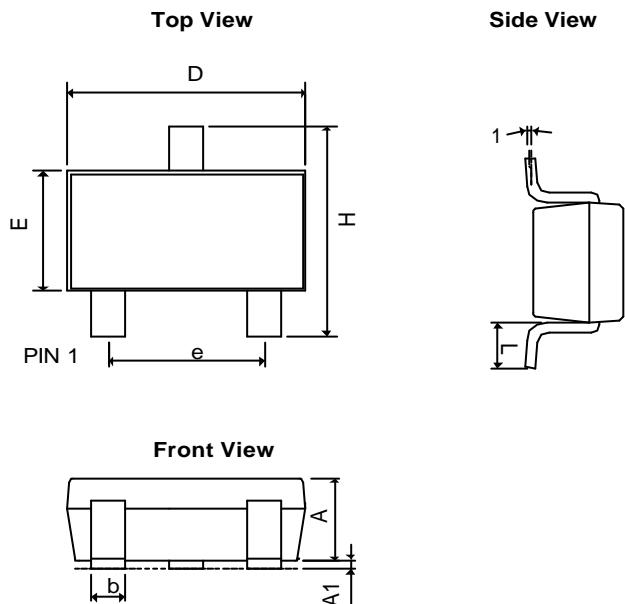

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.90	1.40	0.0354	0.0551
A ₁	0.00	0.15	0.0000	0.0059
b	0.30	0.50	0.0118	0.0197
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.40	3.00	0.0945	0.1181
L	0.35BSC		0.0138 BSC	
q ₁	0°	10°	0°	10°


SC-70-4 (SC-82)

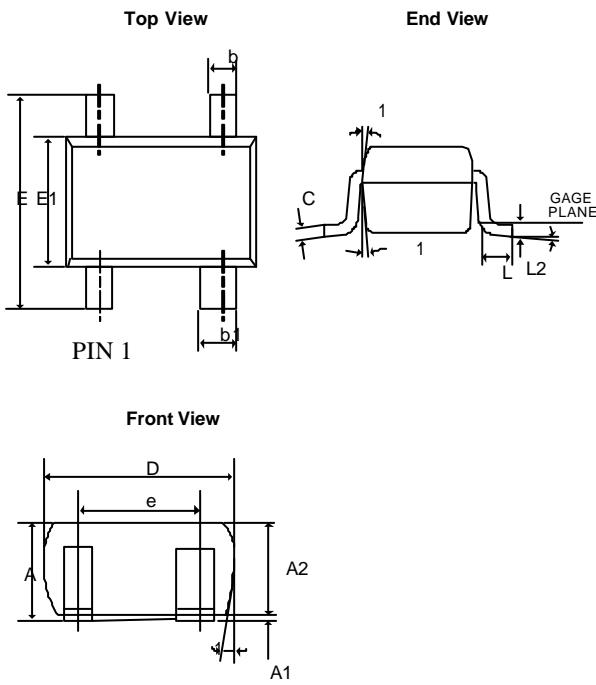

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	-	1.10	-	0.0433
A1	0.00	0.10	0.0000	0.0039
A2	0.70	1.00	0.0276	0.0394
b	0.25	0.35	0.0098	0.0138
b ₁	0.35	0.45	0.0138	0.0177
C	0.08	0.22	0.0031	0.0087
D	2.00 TYP		0.079 TYP	
E1	1.25 TYP		0.049 TYP	
E	2.10 TYP		0.083 TYP	
e	1.30 TYP		0.051 TYP	
L	0.26	0.46	0.0102	0.0181
L ₂	0.15 TYP		0.006 TYP	
y	-	0.10	-	0.0039
q	0°	8°	0°	8°
q ₁	4°	12°	4°	12°

■ Lead Pattern

SC-70-5

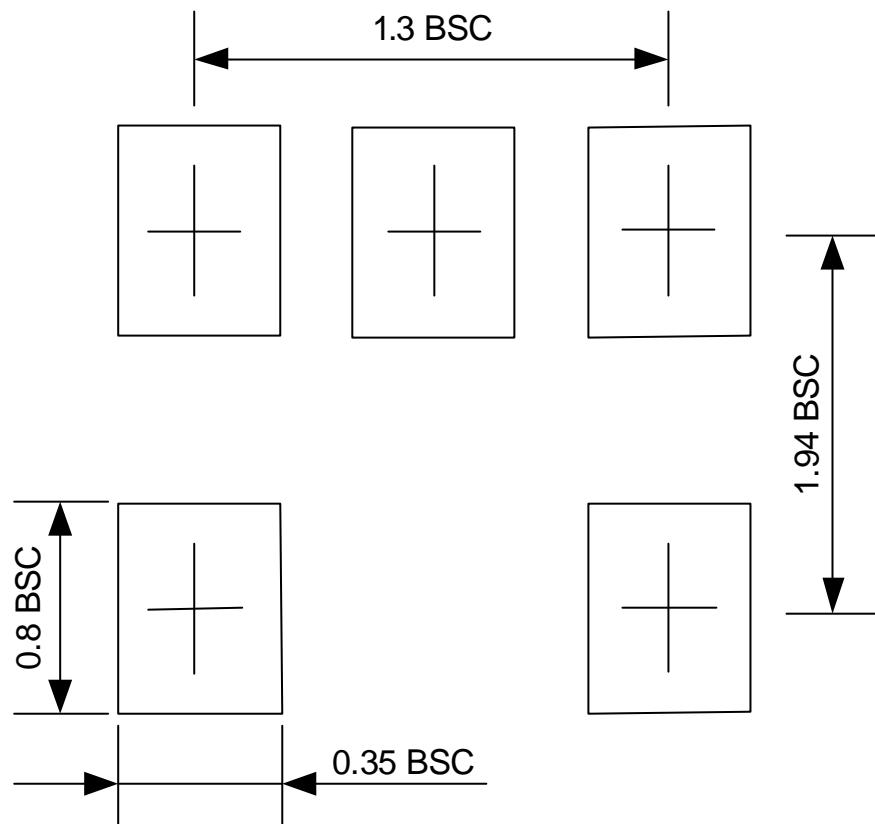**Note:**

1. Lead pattern unit description:


BSC: Basic. Represents theoretical exact dimension or dimension target.

2. Dimensions in Millimeters.

3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.

■ Lead Pattern (Contd.)

SOT-25

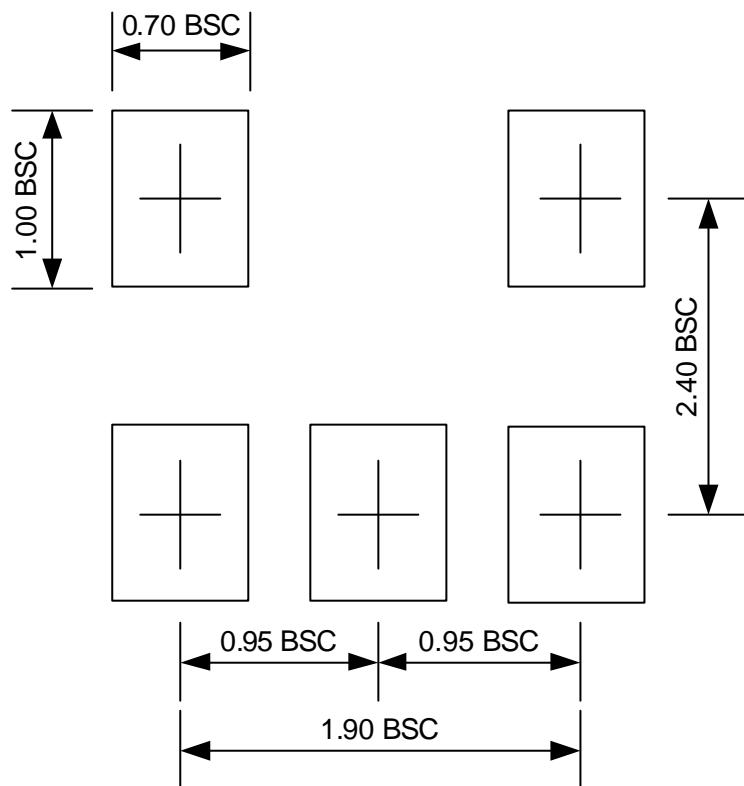**Note:**

1. Lead pattern unit description:


BSC: Basic. Represents theoretical exact dimension or dimension target.

2. Dimensions in Millimeters.

3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.

■ Lead Pattern (Contd.)

TSOT-25A

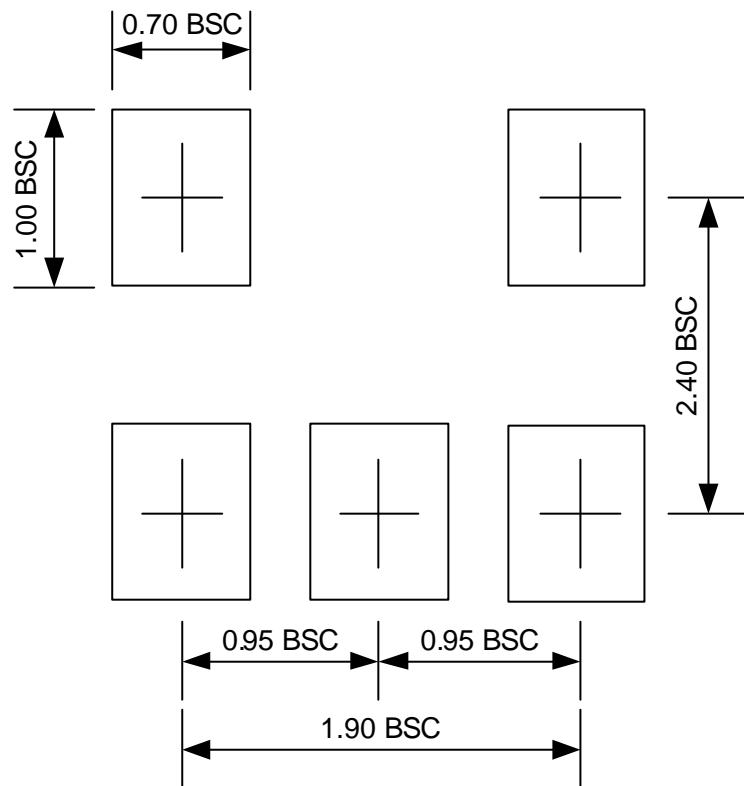

Note:

1. Lead pattern unit description:


BSC: Basic. Represents theoretical exact dimension or dimension target.

2. Dimensions in Millimeters.

3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.

■ Lead Pattern (Contd.)

SC-70-4/SC-82

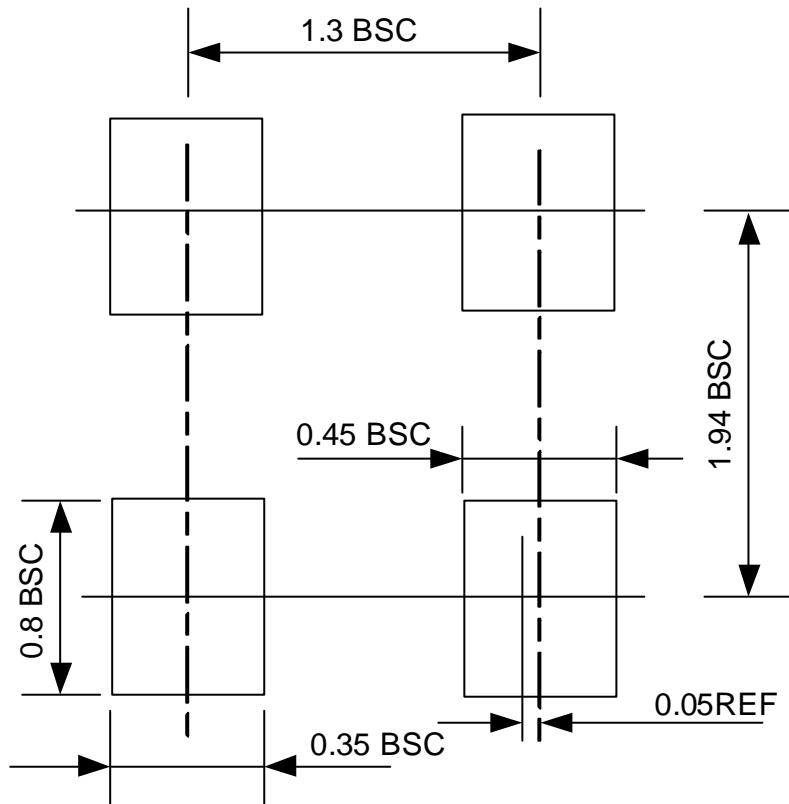

Note:

1. Lead pattern unit description:


BSC: Basic. Represents theoretical exact dimension or dimension target.

2. Dimensions in Millimeters.

3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.

■ Lead Pattern (Contd.)

SOT-23

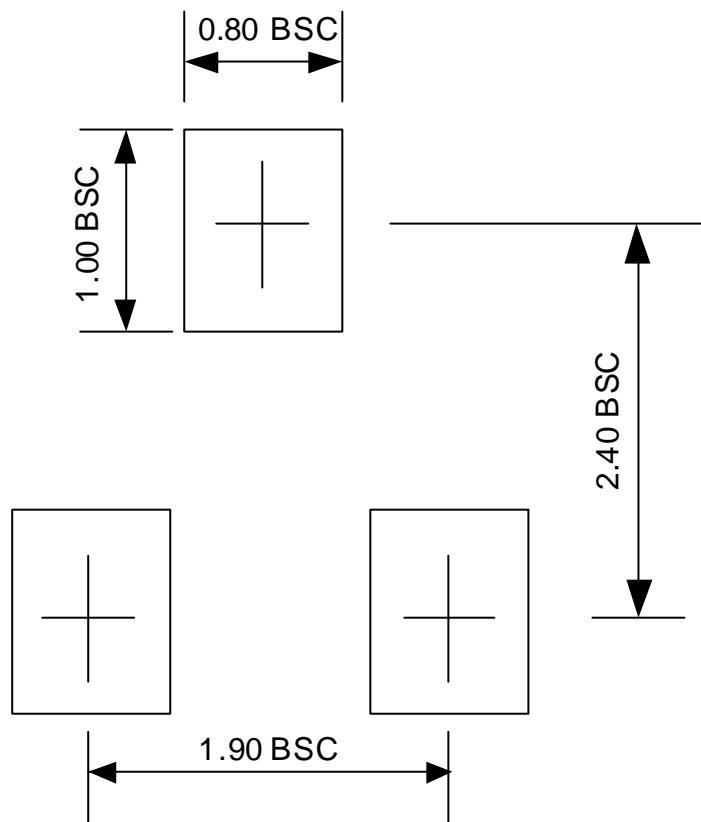**Note:**

1. Lead pattern unit description:

BSC: Basic. Represents theoretical exact dimension or dimension target.

2. Dimensions in Millimeters.

3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.



www.ame.com.tw
E-Mail: sales@ame.com.tw

Life Support Policy:

These products of AME, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of AME, Inc.

AME, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.

© AME, Inc. , Jan 2013

Document: TM001-DS8853-C.03

**Corporate Headquarter
AME, Inc.**

8F, 12, WenHu St., Nei Hu

Taipei, Taiwan. 114

Tel: 886 2 2627-8687

Fax: 886 2 2659-2989