


Wirewound/Metal Film Resistors, Commercial Power, Axial Lead



FEATURES

- High power dissipation in small volume
- Completely welded construction
- Fire proof inorganic construction
- Formed leads available on request
- Film resistors version available on request
- Long leads available

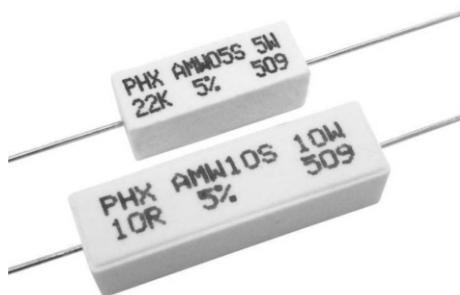

RoHS
COMPLIANT

For closest Vishay Dale equivalent, please contact: ww2aresistors@vishay.com

Note:

- There may be slight differences between the Vishay Phoenix and the Vishay Dale crosses

TECHNOLOGY

The resistor element is a resistive wire, which is wound, on ceramic rod.

Tinned copper leads are connected to the caps by welding. The resistor body are housed in a rectangular ceramic case with a special inorganic potting which is non-flammable, will not melt even at high overloads and is resistant to most commonly used cleaning solvents and moisture.

STANDARD ELECTRICAL SPECIFICATIONS				
MODEL	POWER RATING $P_{40^{\circ}\text{C}}$ W	RESISTANCE RANGE ⁽¹⁾ Ω	TOLERANCE ⁽²⁾ %	E-SERIES Decade Values
AMW03S	3	0.10 - 2.4K	± 5	24
AMW05S	5	0.10 - 4.7K		
AMW07S	7	0.10 - 6.8K		
AMW10S	10	0.10 - 10K		

Notes:

⁽¹⁾ Special resistance values available upon request

⁽²⁾ Other tolerances available upon request

TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	AMWS RESISTOR CHARACTERISTICS
Limiting Voltage	V	$\sqrt{P \times R}$
Insulation Voltage	V	> 2000
Temperature Coefficient ⁽³⁾	ppm/°C	R < 10 Ω : 0 to + 600; R \geq 10 Ω : - 100 to + 150;
Operating Temperature	°C	- 55 to + 275
Short Time Overload	-	10 x rated power for 5 s


Note:

⁽³⁾ Temperature Coefficient of ± 30 , 50 or 90 ppm/°C available upon request




DIMENSIONS in millimeters (inches)

FLAT VERSION

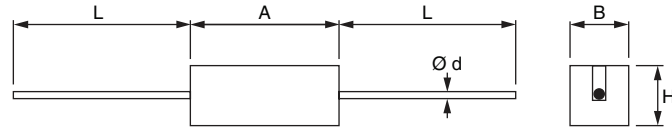


STAND-OFF VERSION

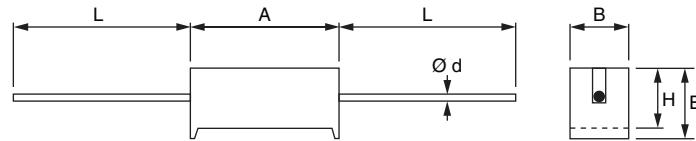

TYPE	A	H	B	E	Ø d	L ⁽¹⁾
AMW03S	17.5 ± 1.5 (0.689 ± 0.06)	6.4 ± 0.8 (0.252 ± 0.031)	6.4 ± 0.8 (0.252 ± 0.031)	8.0 ± 1.0 (0.315 ± 0.04)	0.8 ± 0.03 (0.031 ± 0.001)	28.0 ± 3 (1.10 ± 0.12)
AMW05S	22.2 ± 1.5 (0.874 ± 0.06)	8.0 ± 1.0 (0.315 ± 0.04)	8.0 ± 1.0 (0.315 ± 0.04)	9.5 ± 1.0 (0.374 ± 0.04)		
AMW07S	22.2 ± 1.5 (0.874 ± 0.06)	9.5 ± 1.0 (0.374 ± 0.04)	9.5 ± 1.0 (0.374 ± 0.04)	11 ± 1.0 (0.433 ± 0.04)		
AMW10S	35 ± 1.5 (1.378 ± 0.06)	9.5 ± 1.0 (0.374 ± 0.04)	9.5 ± 1.0 (0.374 ± 0.04)	11.9 ± 1.0 (0.469 ± 0.04)		

ELECTRICAL CHARACTERISTICS

The power that the resistor can dissipate depends on the operating temperature.

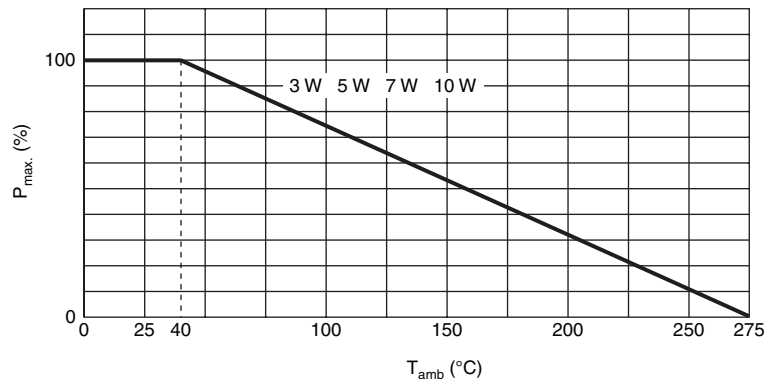

DERATING

Maximum dissipation (P_{max}) in percentage of rated power as a function of ambient temperature (T_{amb})

Notes:

Application information available on request:

- Pulse load behavior
- Hot spot and solder spot curves

MARKING

The resistor is marked with the resistor type designation, nominal resistance value, tolerance, rated power and the production date (week and year), in red on the resistor body.

Example:

PHX	AMW07S	502
5K1	5 %	7 W

Example: AMW07S - 5.1 k Ω - 5 % - week 02 - year 2005

ORDERING INFORMATION

PRODUCT	TOLERANCE	ORDERING CODE	VERSION	LEAD \varnothing in millimeters (inches)	PACKAGING	QUANTITY (pieces)
AMW03S	$\pm 5 \%$	2306 270 13xxx	FLAT	0.80 (0.031)	BOX	360
		2306 270 23xxx	STAND-OFF			300
AMW05S		2306 271 13xxx	FLAT			250
		2306 271 23xxx	STAND-OFF			
AMW07S		2306 272 13xxx	FLAT			
		2306 272 23xxx	STAND-OFF			
AMW10S		2306 273 13xxx	FLAT			
		2306 273 23xxx	STAND-OFF			

Last Digit of Ordering Code

RESISTANCE DECADE	LAST DIGIT
0.1 Ω - 0.91 Ω	7
1 Ω - 9.1 Ω	8
10 Ω - 91 Ω	9
100 Ω - 910 Ω	1
1 k Ω - 9.1 k Ω	2
10 k Ω - 91 k Ω	3
100 k Ω - 910 k Ω	4

The resistors have 12 digit ordering code starting with 2306. The next 5 digits indicate the resistor type and packaging, see table ORDERING INFORMATION.

The last 3 digits indicate the resistance value:

- The first 2 digits of these last 3 indicate the actual resistance value
- The last digit indicates the resistance decade in accordance with table "Last Digit of Ordering Code"

Example:

AMW03S, 100 Ω , 5 %, flat case, box of 250 pieces is
2306 270 13101



NAFTA ORDERING INFORMATION

PRODUCT	TOLERANCE	NAFTA ORDERING CODE	VERSION	LEAD Ø in millimeters (inches)	PACKAGING	QUANTITY (pieces)
AMW03S	± 5 %	AMW03SxxxxxJ	FLAT	0.80 (0.031)	BOX	250
		AMW03SxxxxxJSO	STAND-OFF			
AMW05S		AMW05SxxxxxJ	FLAT			
		AMW05SxxxxxJSO	STAND-OFF			
AMW07S		AMW07SxxxxxJ	FLAT			
		AMW07SxxxxxJSO	STAND-OFF			
AMW10S		AMW10SxxxxxJ	FLAT			
		AMW10SxxxxxJSO	STAND-OFF			

Examples of the Ohmic Value


Value	5 DIGITS
1 Ω	1R000
10 Ω	10R00
100 Ω	100R0
1 kΩ	1K000
10 kΩ	10K00
100 kΩ	100K0

The ohmic value in the NAFTA ordering code (see table NAFTA ORDERING INFORMATION) is represented by the “xxxxx” in the middle of the above ordering code. The table “Examples of the Ohmic Value” gives some examples on how to use these 5 digits.

Example:

AMW03S, 100 Ω, ± 5 %, flat case, box of 250 pieces is **AMW03S100R0J**

PACKAGING in millimeters (inches)



PRODUCT	VERSION	P	M	N	QUANTITY (pieces)
AMW03S	FLAT	227 (8.94)	92 (3.63)	100 (3.94)	250
	STAND-OFF	227 (8.94)	92 (3.63)	-	
AMW05S	FLAT	227 (8.94)	92 (3.63)	100 (3.94)	
	STAND-OFF	227 (8.94)	92 (3.63)	-	
AMW07S	FLAT	256 (10.08)	92 (3.63)	105 (4.14)	
	STAND-OFF	256 (10.08)	92 (3.63)	-	
AMW10S	FLAT	256 (10.08)	105 (4.14)	105 (4.14)	
	STAND-OFF	256 (10.08)	105 (4.14)	-	

TESTS AND REQUIREMENTS

Essentially all tests and requirements present in table below, follow the schedule of IEC standard publication 60115-1, 60015-4, 60068.

PERFORMANCE				
IEC 60115-1 CLAUSE	IEC 60068 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.6.1.1	-	Insulation resistance	500 V _{DC} during 1 min; V-block method	$R_{ins \min.} 100 \text{ M}\Omega$
4.7	-	Voltage proof on insulation	1000 V _{RMS} during 1 min; V-block method	No breakdown or flashover
4.8	-	Temperature coefficient	Between - 55 °C at + 275 °C $R < 10 \Omega$ $R \geq 10 \Omega$	0 to + 600 ppm/°C; + 150 to - 100 ppm/°C
4.13	-	Short time overload	Dissipation 10 x P _n ; 5 s	$\Delta R/R_{\max.} \pm 2 \% + 0.05 \Omega$
4.16	21(U)	Robustness of terminations:		
4.16.2	21(Ua1)	Tensile all samples	Load 10 N; 10 s	No visible damage $\Delta R/R_{\max.} \pm 2 \% + 0.05 \Omega$
4.16.3	21(Ub)	Bending half number of samples	Load 5 N; 4 x 90°	
4.16.4	21(Uc)	Tension other half of samples	3 x 360° in opposite directions	
4.17	20(Ta)	Solderability (after aging)	16 h at 155 °C; leads immersed in flux 600, leads immersed 2 mm for 2 ± 0.5 s in a solder bath at 235 ± 5 °C	Good tinning; no damage $\Delta R/R_{\max.} \pm 0.5 \% + 0.05 \Omega$
4.18	20(Tb)	Resistance to soldering heat	Thermal shock: 3 s, 350 °C; 6 mm from body	$\Delta R/R_{\max.} \pm 4 \% + 0.05 \Omega$
4.19	14(Na)	Rapid change of temperature	30 min at - 55 °C and 30 min + 275 °C; 5 cycles	No visual damage $\Delta R/R_{\max.} \pm 5 \% + 0.05 \Omega$
4.23		Climatic sequence:		
4.23.2	2(Ba)	Dry heat	16 h, 275 °C	$\Delta R/R_{\max.} \pm 3 \% + 0.05 \Omega$
4.23.3	30(Db)	Damp heat (accelerated) 1st cycle	24 h, 25 °C to 55 °C; 90 to 100 % RH	
4.23.4	1(Aa)	Cold	2 h, - 65 °C	
4.23.6	30 (Db)	Damp heat (accelerated) remaining cycles	6 days; 55 °C; 90 to 98 % RH	
4.24	3 (Ca)	Damp heat (steady state)	56 days; 40 °C; 90 to 95 % RH; loaded with 0.01 P _n	$\Delta R/R_{\max.} \pm 5 \% + 0.05 \Omega$
4.25.1	-	Endurance 40 °C	1000 h load with P _n or V _{max.} ; 1.5 h ON and 0.5 h OFF	No damage $\Delta R/R_{\max.} \pm 5 \% + 0.1 \Omega$



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.