

AN2516S


Electronic View-Finder Driving IC with Character Input

■ Overview


The AN2516S is a drive IC for an electronic monochrome view-finder of a video camera. The AN2516S has all the functions of the AN2515S except HD and VD output, and has attached γ -correction (which compensates luminance characteristics). It is easy to make up a 0.5-inch electronic view-finder with minimal external components.

■ Features

- Built-in video amplifier, synchronous signal separation, horizontal vertical oscillator, AFC, γ correction, character mixing, and vertical driver circuits.
- Direct drive of a vertical deflection coil available
- Built-in capacitor for vertical synchronous signal separation

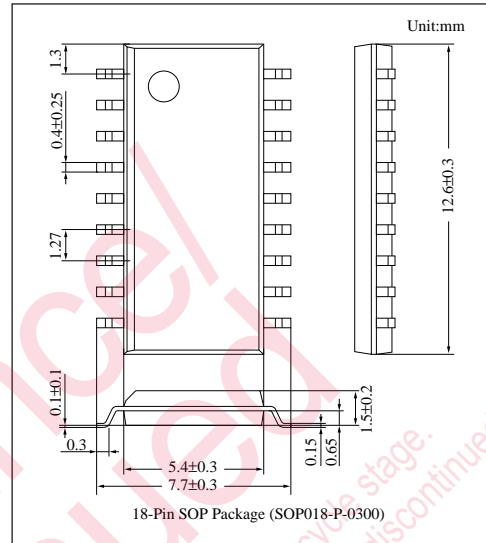

■ Block Diagrams

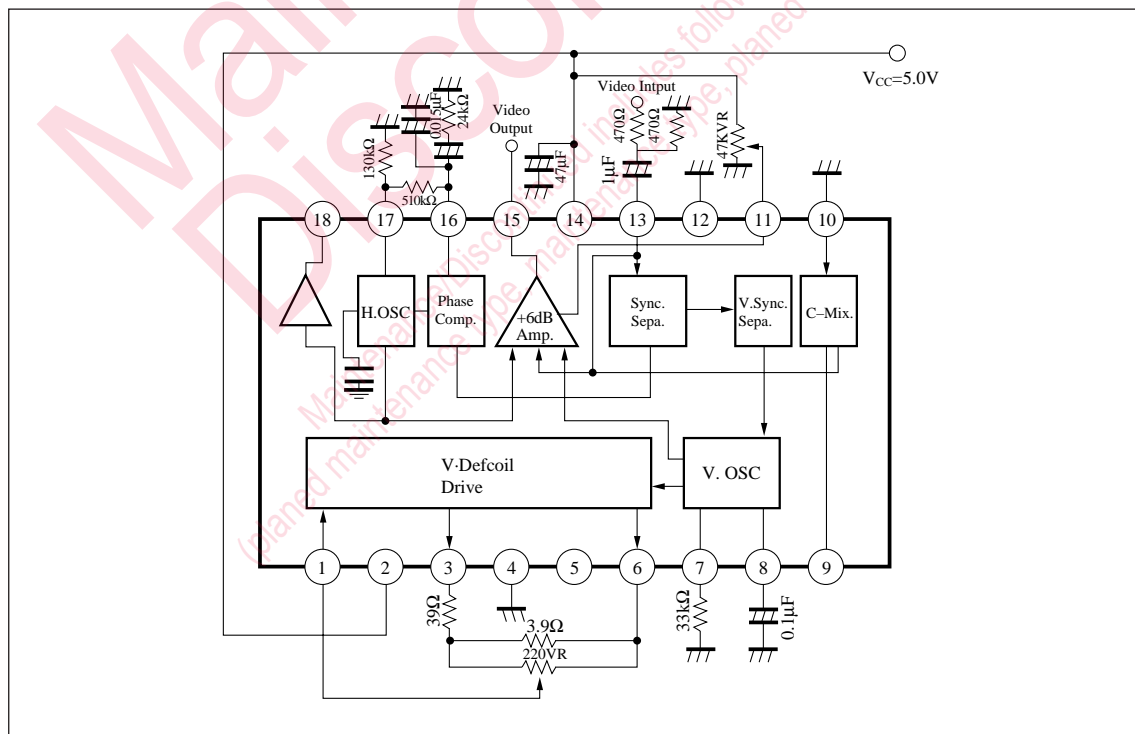

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	5.5	V
Supply current	I _{CC}	47	mA
Power dissipation ^{Note 2)}	P _D	190	mW
Operating ambient temperature ^{Note 1)}	T _{opr}	-20 to +75	°C
Storage temperature ^{Note 1)}	T _{stg}	-55 to +125	°C

Note 1) Ta=25°C except operating ambient temperature and storage temperatures unless otherwise specified.

Note 2) Allowable power dissipation of the package at Ta=70°C.

■ Recommended Operating Range (Ta=25°C)

Parameter	Symbol	Range
Operating supply voltage range	V _{CC}	4.5V to 5.3V

■ Electrical Characteristics (V_{CC}=5V, Ta=25±2°C)

Parameter	Symbol	Condition	min	typ	max	Unit	Note
Supply current (1)	I ₂		2.35	7.5	13.0	mA	at no-load
Supply current (2)	I ₁₄		5.5	10.0	14.0	mA	at no-load
Video amp. gain (1)	G _{V1}		10.5	11.5	12.5	dB	—
Video amp. gain (2)	G _{V2}		4.3	5.3	6.3	dB	—
Synchronous separating capability (1)	HSEP1		0.2	—	—	V	—
Synchronous separating capability (2)	HSEP2		—	—	1.3	V	—
Video signal HD width	τ _{Hout}		7.0	8.0	9.0	μs	—
AFC output HD width	τ _{AFCHD}		9.5	10.5	11.5	μs	—
Horizontal free oscillation freq.	f _{Hfree}		14.25	15.75	17.25	kHz	—
AFC loop gain	f _{AFC}		15.25	15.75	16.25	kHz	—
Control sensitivity	β		840	960	1080	Hz/μA	—
Vertical separation time	T _{VSEP}		8	16	24	μs	—
Video signal HD width	τ _{VOUT}		1.1	1.3	1.5	ms	—
Vertical free-oscillation freq.	f _{Vfree}		45	49	53	Hz	—
Vertical deflection output amplitude (1)	V _{VDEF1}		1.3	1.6	1.9	V	—
Vertical deflection output amplitude (2)	V _{VDEF2}		1.3	1.6	1.9	V	—
Vertical deflection output dynamic range (1)	DR _{VDEF1}		2.0	2.4	2.8	V	—
Vertical deflection output dynamic range (2)	DR _{VDEF2}		2.0	2.4	2.8	V	—
Character-Black level	CBL		0.15	0.20	0.25	—	—
Character-White level	CWL		0.65	0.85	1.05	—	—
Vertical deflection output min. drive capability	V ₃₋₄		0.65	—	—	V	—

■ Pin Descriptions

Pin No.	Pin name	Pin No.	Pin name
1	Vertical size control input	10	Character input
2	Power supply input	11	Gamma control
3	Vertical deflection coil driver output (1)	12	GND
4	GND	13	Video input
5	N. C.	14	Power supply input
6	Vertical deflection coil driver output (2)	15	Video amplifier output
7	Vertical oscillation resistor pin	16	Phase comparator output
8	Vertical oscillation capacitor pin	17	Horizontal oscillation resistor pin
9	Character-level control	18	Horizontal AFC output

Maintenance/Discontinued

Maintenance/Discontinued includes following four Product lifecycle stage.
(planned maintenance type, maintenance type, planned discontinued type, discontinued type)

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.