




Prepared	M.A.M FOWZAN	Product Specifications <b>AN80T05</b> FINAL SPECS	APPROVED	Ref. No.	A-1
Checked	Kenneth Law		EXTERNAL ISSUE	Total Page	11
Approved			Page No.	1	

Structure	Silicon Monolithic Bipolar IC
Appearance	SIL-12 Pins Plastic Package (Power Type With Fin)
Application	Voltage Supply for Car Audio Systems
Function	7 Outputs Voltage Regulator Peak Current Protection Circuit, ASO Protection Circuit, Thermal Protection Circuit




A Absolute Maximum Ratings					
No.	Item	Symbol	Ratings	Unit	Note
1	Storage Temperature	Tstg	-55 ~ +150	° C	1
2	Operating Ambient Temperature	Topr	-30 ~ +85	° C	1
3	Operating Ambient Pressure	Popr	$1.013 \times 10^5 \pm 0.61 \times 10^5$ (1.0 ± 0.6)	Pa (atm)	
4	Operating Constant Acceleration	Gopr	9,810 (1,000)	m / s <sup>2</sup> (G)	
5	Operating Shock	Sopr	4,900 (500)	m / s <sup>2</sup> (G)	
6	Power Supply Voltage	Vcc	26.0	V	
7	Power Supply Current	Icc	3.8	A	2
8	Power Dissipation	PD	2.70	W	3

Operating Supply Voltage Range	Vcc	6.6 V ~ 24.0 V
--------------------------------	-----	----------------

Note : 1) Except these items, all other measurements are taken at Ta = 25°C.

2) Over current limiting circuit built-in.

3) Ta = 75°C without heat sink. The relationship between power dissipation and ambient temperature follows that of derating curve.

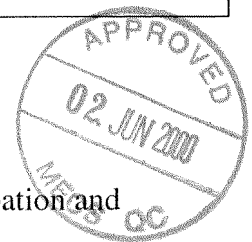

Eff. Date	Eff. Date	Eff. Date	Eff. Date
23-Aug-1999	22-SEP-99	1-Jun-2000	

Prepared	M.A.M FOWZAN	Product Specifications	REV No.	A-2
Checked	Kenneth Jaw		Total Page	11
Approved	<i>[Signature]</i>		Page No.	2

# AN80T05

FINAL SPECS



Recommended Operating Condition							
No.	Item	Symbol	Limit			Unit	Note
			Min	Typ	Max		
1	Recommended Power Supply Voltage	VCC	10.0	13.2	16.0	V	
			11.0	13.2	16.0	V	1

Note : 1) This range is applicable to Illumination Output which is  $V_{(Out)ILL}=10V$ .

Eff. Date	Eff. Date	Eff. Date	Eff. Date
23-Aug-1999	22-SEP-99	1-Jun-2000	

Prepared	M.A.M.FOWZAN	<b>Product Specifications</b> <b>AN80T05</b> FINAL SPECS	<b>APPROVED</b> Ref No. B-1
Checked	Kenneth Lau		<b>EXTERNAL ISSUE</b> Total Page 11
Approved	<i>[Signature]</i>		Page No. 3



B		Electrical Characteristics (Unless otherwise specified, ambient temperature is 25°C±2°C, Vcc=13.2V.)							
No.	Item	Symbol	Test Cct.	Condition	Limit			Unit	Note
					Min	Typ	Max		
	<VILL Output 1>								
1	Output Voltage Vo1	VILL		IO1=-240mA	9.5	10	10.5	V	
2	Line Regulation	REGIN(ILL)		VO1=10V, IO1=-240mA VCC=11~16V	-	20	60	mV	
3	Load Regulation	REGL(ILL)		VO1=10V, IO1=0~-240mA	-	60	120	mV	
4	Min. Input/Output Voltage Difference	VDIF1(min)		VO1=10V, VCC=9V IO1=-240mA	-	0.4	0.7	V	
5	Peak Output Current	IO1(peak)		VO1≥9.5V	300	550	-	mA	
6	Ripple Rejection Ratio	RR1		VO1=10V, f=100Hz VCC=12~14V	40	55	-	dB	
	<VDD Output 2>								
7	Output Voltage Vo2	VDD		IO2=-80mA	5.3	5.6	5.9	V	
8	Line Regulation	REGIN(VDD)		VO2=5.6V, IO2=-80mA VCC=10~16V	-	5	15	mV	
9	Load Regulation	REGL(VDD)		VO2=5.6V, IO2=0~-80mA	-	50	120	mV	
10	Min. Input/Output Voltage Difference	VDIF2(min)		VO2=5.6V, VCC=5V IO2=-80mA	-	0.4	0.7	V	
11	Peak Output Current	IO2(peak)		VO2≥5.3V	100	200	-	mA	
12	Ripple Rejection Ratio	RR2		VO2=5.6V, f=100Hz VCC=12~14V	50	60	-	dB	
	<AMP Output 3>								
13	Min. Input/Output Voltage Difference	VDIF3(min)		IO3=-400mA	-	1	1.5	V	
14	Load Regulation	REGL(AMP)		IO3=0~-400mA	-	350	600	mV	
15	Peak Output Current	IO3(peak)		VO3≥11.7V	500	800	-	mA	

Eff. Date	Eff. Date	Eff. Date	Eff. Date
23-Aug-1999	22-SEP-99	1-Jun-2000	

B Electrical Characteristics		(Unless otherwise specified, ambient temperature is 25°C±2°C, Vcc=13.2V.)							
No.	Item	Symbol	Test Cct.	Condition	Limit			Unit	Note
					Min	Typ	Max		
	<ANT Output 4>								
16	Min. Input/Output Voltage Difference	VDIF4(min)		IO4=-400mA	-	1	1.5	V	
17	Load Regulation	REGL(ANT)		IO4=0~-400mA	-	350	600	mV	
18	Peak Output Current	IO4(peak)		VO4≥11.7V	500	800	-	mA	
	<VCOM Output 5>								
19	Output Voltage VO5	VCOM		IO5=-120mA	8.25	8.70	9.15	V	
20	Line Regulation	REGIN(COM)		VO5=8.7V, IO5=-120mA VCC=10~16V	-	10	30	mV	
21	Load Regulation	REGL(COM)		VO5=8.7V, IO5=0~-120mA	-	60	120	mV	
22	Min. Input/Output Voltage Difference	VDIF5(min)		VO5=8.7V, VCC=7.8V IO5=-120mA	-	0.4	0.7	V	
23	Peak Output Current	IO5(peak)		VO5≥8.25V	150	300	-	mA	
24	Ripple Rejection Ratio	RR5		VO5=8.7V, f=100Hz VCC=12~14V	50	60	-	dB	
	<AM Output 6>								
25	Output Voltage VO6	VAM		IO6=-120mA	8.25	8.70	9.15	V	
26	Line Regulation	REGIN(AM)		VO6=8.7V, IO6=-120mA VCC=10~16V	-	10	30	mV	
27	Load Regulation	REGL(AM)		VO6=8.7V, IO6=0~-120mA	-	60	120	mV	
28	Min. Input/Output Voltage Difference	VDIF6(min)		VO6=8.7V, VCC=7.8V IO6=-120mA	-	0.4	0.7	V	
29	Peak Output Current	IO6(peak)		VO6≥8.25V	150	300	-	mA	
30	Ripple Rejection Ratio	RR6		VO6=8.7V, f=100Hz VCC=12~14V	50	60	-	dB	

Eff. Date	Eff. Date	Eff. Date	Eff. Date
23-Aug-1999	22-SEP-99	1-Jun-2000	

B Electrical Characteristics		(Unless otherwise specified, ambient temperature is 25°C±2°C, Vcc=13.2V.)							
No.	Item	Symbol	Test Cct.	Condition	Limit			Unit	Note
					Min	Typ	Max		
	<FM Output 7>								
31	Output Voltage Vo7	V <sub>FM</sub>		I <sub>O7</sub> =-200mA	8.25	8.70	9.15	V	
32	Line Regulation	REG <sub>IN</sub> (FM)		V <sub>O7</sub> =8.7V, I <sub>O7</sub> =-200mA V <sub>CC</sub> =10~16V	-	20	60	mV	
33	Load Regulation	REG <sub>L</sub> (FM)		V <sub>O7</sub> =8.7V, I <sub>O7</sub> =0~-200mA	-	60	120	mV	
34	Min. Input/Output Voltage Difference	V <sub>DIF7</sub> (min)		V <sub>O7</sub> =8.7V, V <sub>CC</sub> =7.8V I <sub>O7</sub> =-200mA	-	0.4	0.7	V	
35	Peak Output Current	I <sub>O7</sub> (peak)		V <sub>O7</sub> ≥8.25V	250	450	-	mA	
36	Ripple Rejection Ratio	RR7		V <sub>O7</sub> =8.7V, f=100Hz V <sub>CC</sub> =12~14V	45	55	-	dB	
37	Standby Circuit Current	ISTB		Standby Pin=0V	-	0.55	0.80	mA	
	Input (Standby)								
38	Standby Level	V <sub>TH1-1</sub>			-	-	1.1	V	
39	Active Level	V <sub>TH1-2</sub>			1.7	-	-	V	
40	Input Current when High	I <sub>in1</sub>		V <sub>th1</sub> =5V	100	175	250	μA	
	Input (Mode 2 SW)								
41	Standby Level	V <sub>TH2-1</sub>			-	-	1.6	V	
42	Active Level	V <sub>TH2-2</sub>			2.4	-	-	V	
43	Input Current when High	I <sub>in2</sub>		V <sub>th2</sub> =5V	13	25	37	μA	
	Input (Mode 1 SW)								
44	Voltage when AM ON	V <sub>TH3-1</sub>			-	-	1.1	V	
45	Voltage when FM ON	V <sub>TH3-2</sub>			2.7	-	-	V	
46	Input Current when High	I <sub>in3</sub>		V <sub>th3</sub> =5V	13	25	37	μA	

Eff. Date	Eff. Date	Eff. Date	Eff. Date
23-Aug-1999	22-SEP-99	1-Jun-2000	

**APPROVED**  
 Ref No. C-1  
**EXTERNAL ISSUE**  
 Total Page 11


Prepared	M. A. M. Fowzan
Checked	Kenneth Law
Approved	<i>[Signature]</i>

# Product Specifications


## AN80T05

FINAL SPECS

Page No. 6



### \* Input/Output Timing Chart

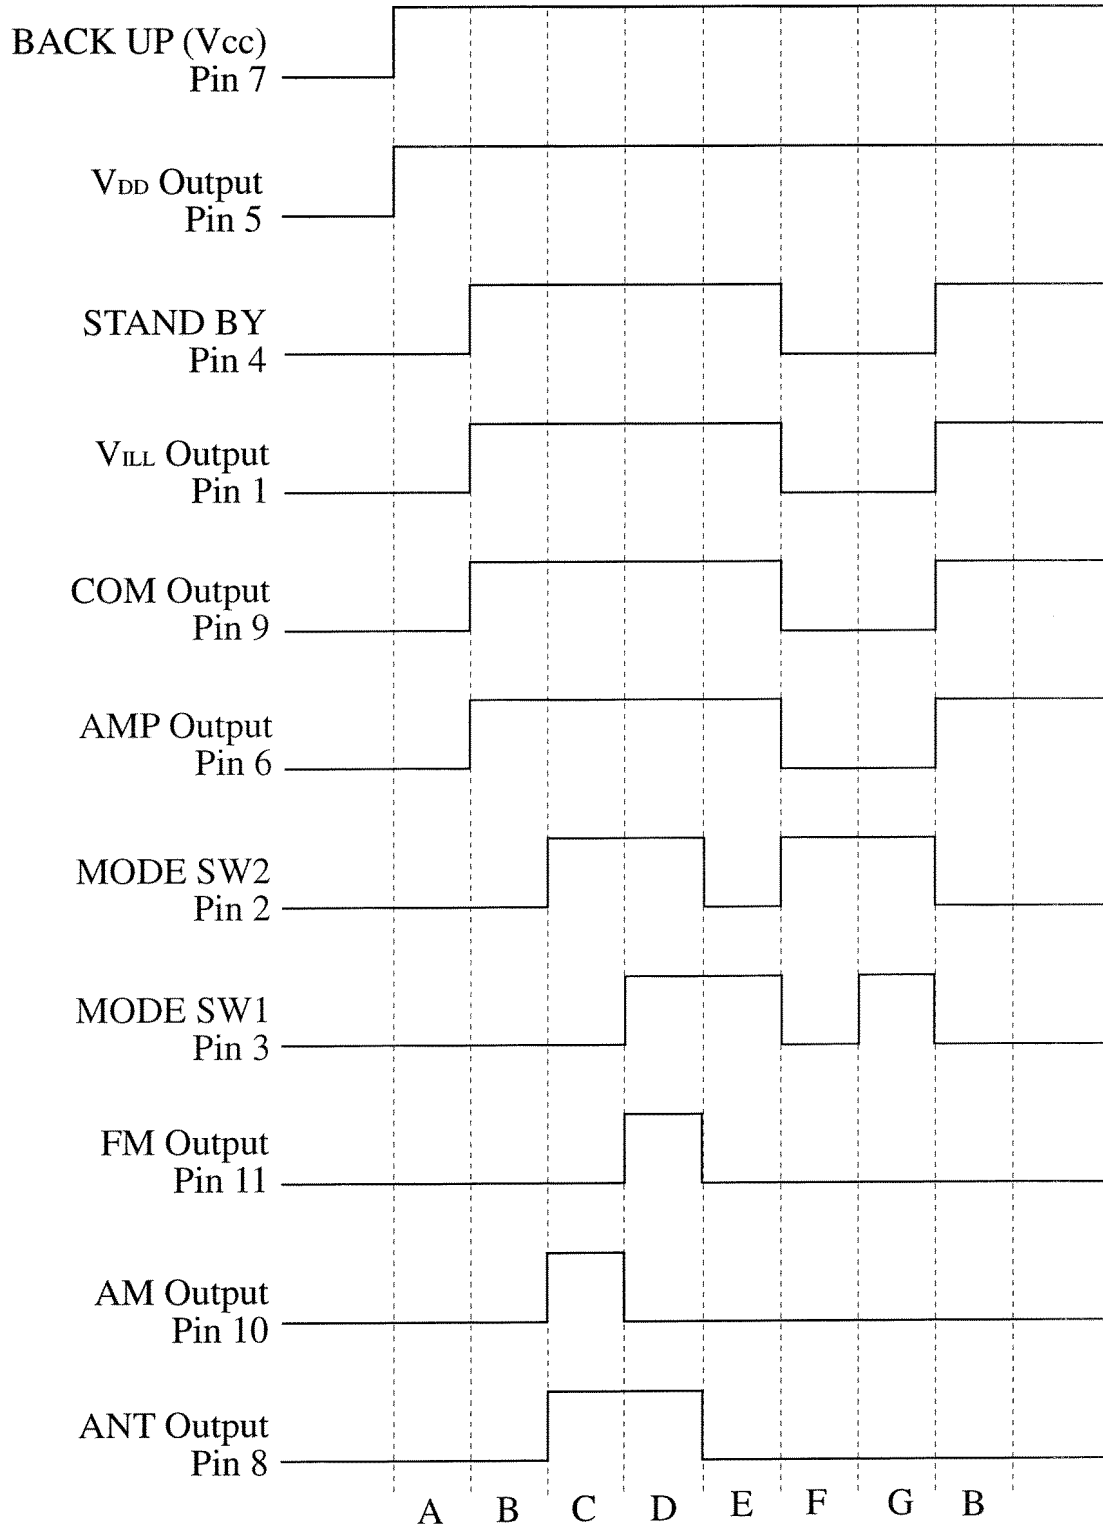

Eff. Date	Eff. Date	Eff. Date	Eff. Date
23-Aug-1999	22-SEP-99	1-Jun-2000	

**APPROVED**  
**EXTERNAL ISSUE**

Prepared *M.A.M FOWZAN*  
Checked *Kenneth Lau*  
Approved *[Signature]*

**Product Specifications**


Ref No. D-1  
Total Page 11  
Page No. 7

**AN80T05**

FINAL SPECS



**Circuit Function Block Diagram**

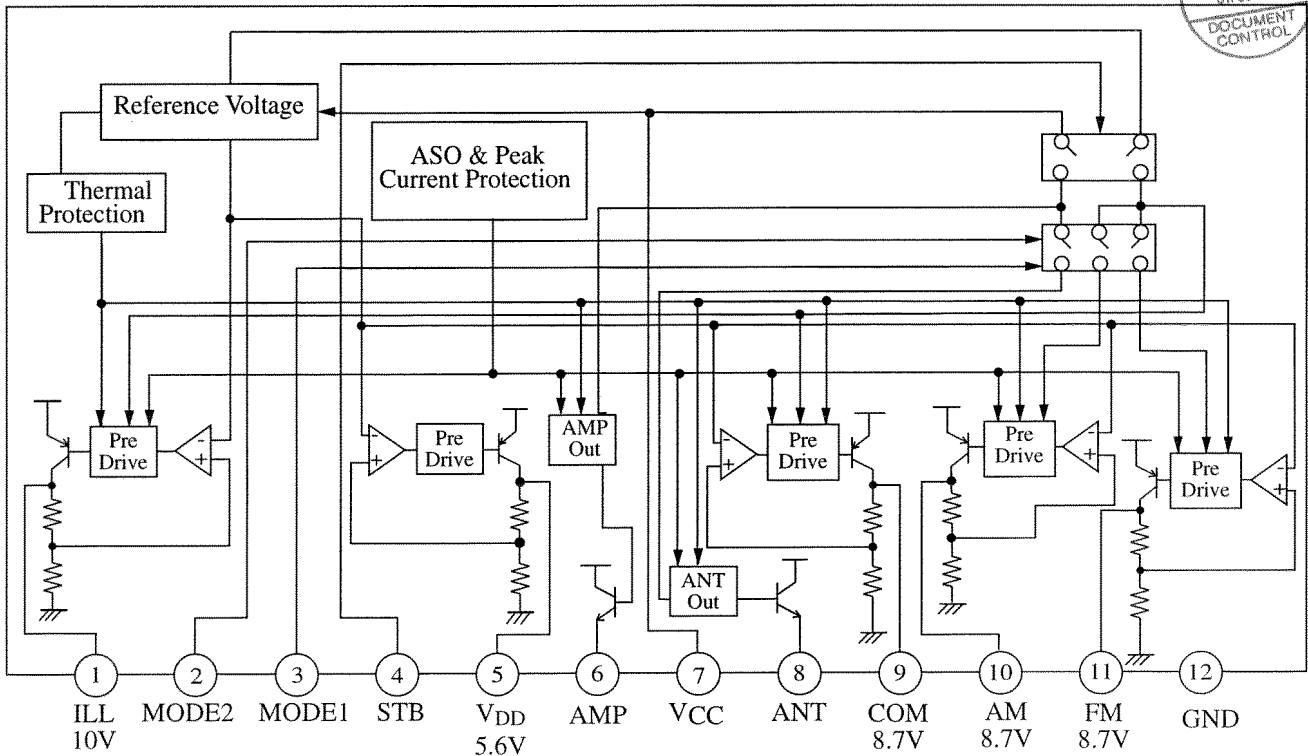

**Pin Descriptions**

Pin No.	Pin Descriptions	Function
1	Illumination Output	10V power supply with a maximum output current of 300mA for a Illumination.
2	MODE2 SW	AM and ANT output are turned ON when this pin is 5V.
3	MODE1 SW	AM and FM output are switched when this pin is 5V.
4	STAND BY	Only VDD output during the 0V standby state; ILL, COM and AMP outputs are turned ON when this pin is 5V.
5	VDD Output	5.6V Power supply with a maximum output current of 100mA for a micro-controller. Output is always available if BACKUP power supply is connected.
6	AMP Output	Power supply to activate a remote amplifier; a voltage of about 1V (Typ) lower than Vcc voltage is provided with a maximum output current of 500mA.
7	VCC	Connected to car BACKUP and ACC Power supplies.
8	ANT Output	Power supply to drive an antenna voltage of about 1V (Typ) lower than the Vcc voltage is provided with a maximum output current of 500mA.
9	COM Output	8.7V power supply with a maximum output current of 150mA; this can be used as a system common power supply.
10	AM Output	8.7V power supply with a maximum output current of 150mA for AM receiver.
11	FM Output	8.7V power supply with a maximum output current of 250mA for FM receiver.
12	GND	Connected to the IC substrate.

Eff. Date	Eff. Date	Eff. Date	Eff. Date
23-Aug-1999	22-SEP-99	1-Jun-2000	



**APPROVED**  
**EXTERNAL ISSUE**


Prepared	Lim Fuey Sheen	<b>Product Specifications</b> <h1 style="margin: 0;">AN80T05</h1>	Ret.No.	E
Checked	Kenneth Law		Total Page	11
Approved	Yasuo Higuchi		Page No.	8

**12-SIL(FP)**

Package Name

FP-12S

Unit : mm

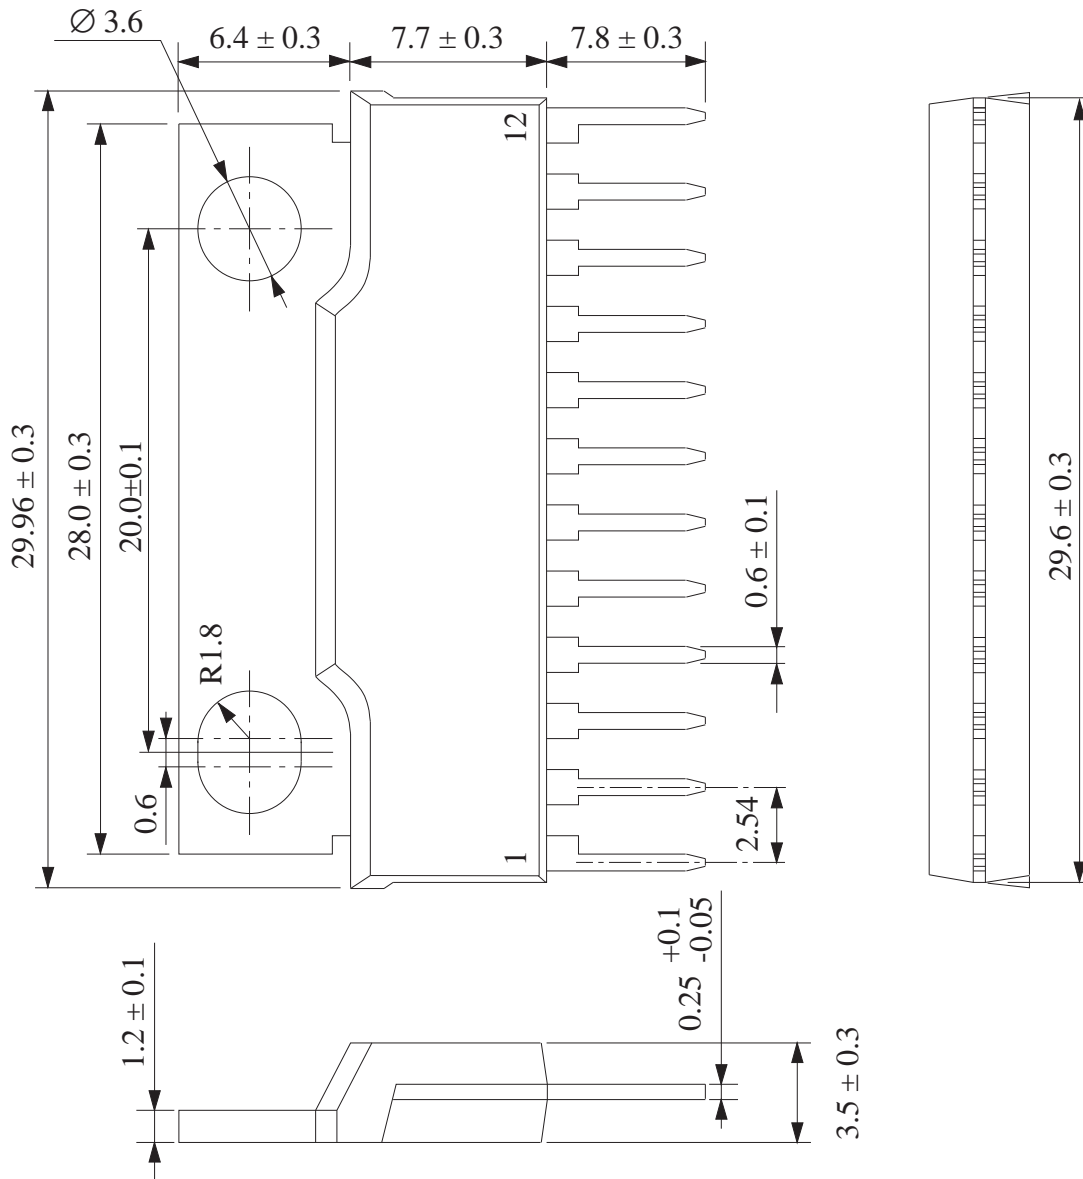

\*4

Eff. Date	Eff. Date	Eff. Date	Eff. Date
21-MAR-05			

Prepared	Lim Fuey Sheen	<b>Product Specifications</b> (Leadfree) <b>AN80T05</b>	<b>APPROVED</b> <b>EXTERNAL ISSUE</b>	Rel. No.	F
Checked	Kenneth Law		Total Page	11	
Approved	Yasuo Higuchi		Page No.	9A	

**(Structure Description)**


Chip surface passivation	SiN, PSG, Others ( )	①
Lead frame material	Fe group, Cu group, Others ( )	②, ⑥
Inner lead surface process	Ag plating, Au plating, Others ( )	②
Outer lead surface process	Solder plating (98Sn-2Bi), Solder dip, Others ( )	⑥
Chip mounting method	Ag paste, Au-Si alloy, Solder (95.5Pb-2.5Ag-2Sn)**	③
Wire bonding method	Thermalsonic bonding, Others ( )	④
Wire material	Au, Others ( )	④
Mold material	Epoxy, Others ( )	⑤
Molding method	Transfer mold, Multiplunger mold, Others ( )	⑤
Fin material	Cu group, Others ( )	⑦

\*3

\*3

**Package FP-12S**

\*\*Under RoHS exemption clause, Lead (Pb) in high melting temperature type solder (i.e. tin-lead solder alloys containing more than 85% of lead), is exempted until 2010.

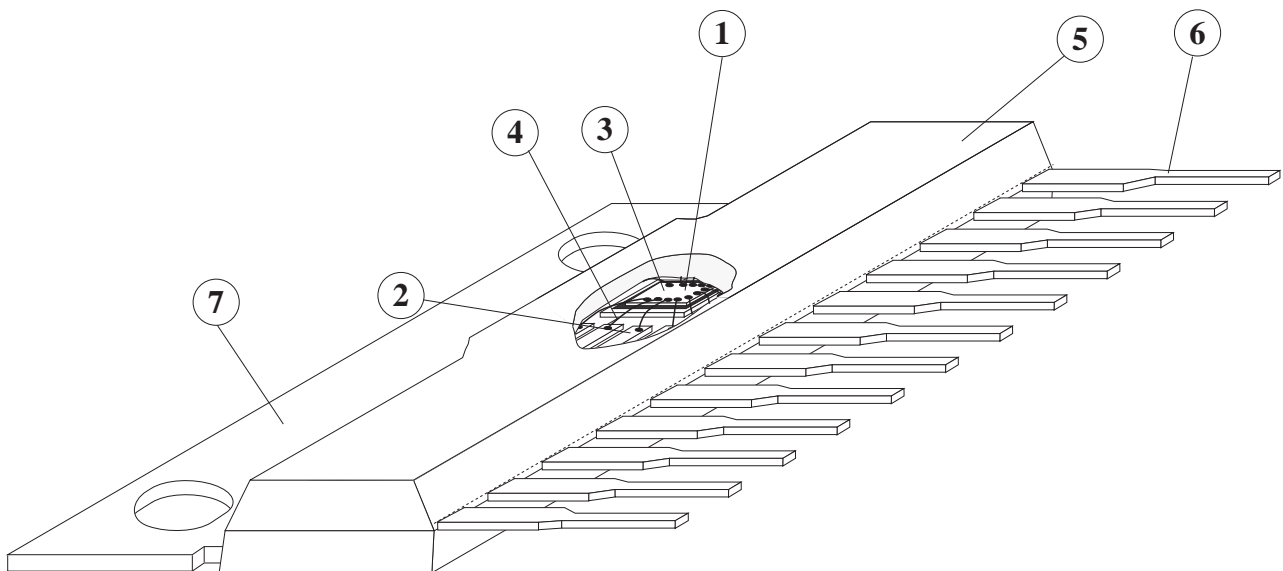

\*3


Eff. Date	Eff. Date	Eff. Date	Eff. Date
-	-	-	16-DEC-04

**APPROVED**  
**EXTERNAL ISSUE**

Prepared	M.A.M FOWZAN	Product Specifications	Ref No.	G-
Checked	Kenneth Law	<b>AN80T05</b>	Total Page	11
Approved	<i>[Signature]</i>	FINAL SPECS	Page No.	10



Application Circuit

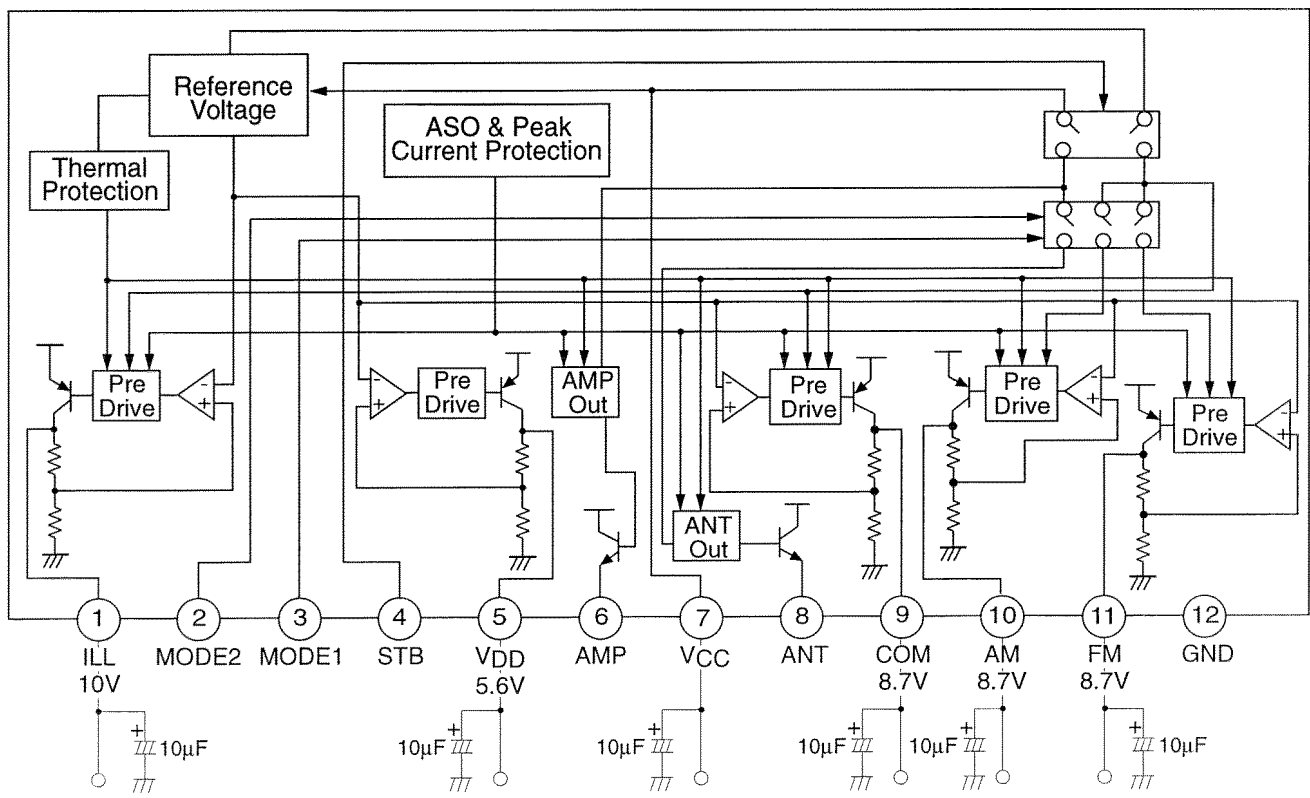

STB 'OFF'	GND
STB 'ON'	5V

Note : To prevent oscillation at each output, make sure to connect a capacitor having a capacitance of 10 $\mu$ F or greater between GND and each of the ILL (pin 1), VDD (pin 5), VCC (pin7), COM (pin 9), AM (pin 10), and FM (pin 11) pins. We recommend using a tantalum electrolytic capacitor whose capacitance is unsusceptible to temperature.

Eff. Date	Eff. Date	Eff. Date	Eff. Date
23-Aug-1999	22-SEP-99	1-Jun-2000	

**APPROVED**  
**EXTERNAL ISSUE**

Prepared	M.A.M FOWZAN
Checked	Kenneth Law
Approved	<i>[Signature]</i>

**Product Specifications**

Ref No.	G-2
Total Page	1
Page No.	11

**AN80T05**



FINAL SPECS

Package Name

FP-12S

**PD - Ta Curves**

- (1)  $T_c = T_a$ , 62.5W ( $\theta_{j-c} = 2 \text{ }^\circ\text{C/W}$ )
- (2) 20.83W ( $\theta_f = 4.0 \text{ }^\circ\text{C/W}$ )  
With a 100cm<sup>2</sup> X 3mm Al heat sink (black colour coated)  
or a 200cm<sup>2</sup> X 2mm Al heat sink (not lacquered)
- (3) 15.63W ( $\theta_f = 6.0 \text{ }^\circ\text{C/W}$ )  
With a 100cm<sup>2</sup> X 2mm Al heat sink (not lacquered)
- (4) 3.0W at  $T_a = 25 \text{ }^\circ\text{C}$  ( $\theta_{j-a} = 42 \text{ }^\circ\text{C/W}$ )  
Without heat sink

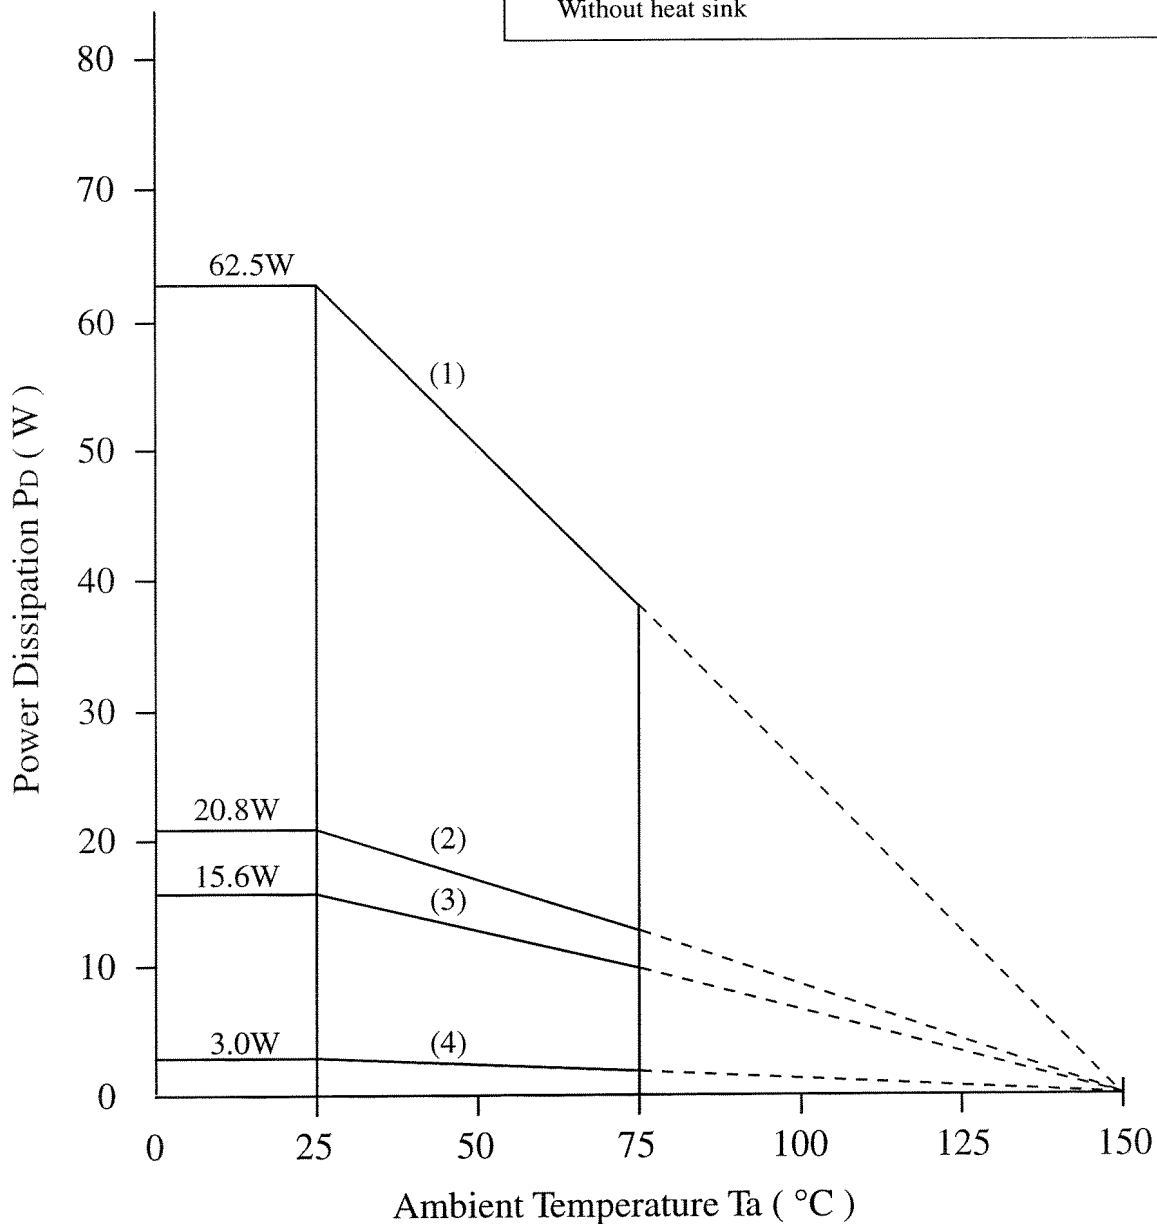

Eff. Date	Eff. Date	Eff. Date	Eff. Date
23-Aug-1999	22-SEP-99	1-Jun-2000	