



**ALPHA & OMEGA**  
SEMICONDUCTOR

**AOK095A60**

**600V,  $\alpha$ MOS5™ N-Channel Power Transistor**

### General Description

- Proprietary  $\alpha$ MOS5™ technology
- Low  $R_{DS(ON)}$
- Optimized switching parameters for better EMI performance
- Enhanced body diode for robustness and fast reverse recovery


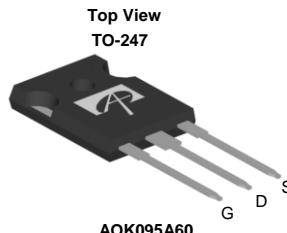
### Applications

- SMPS with PFC, Flyback and LLC topologies
- Micro inverter with DC/AC inverter topology

### Product Summary

$V_{DS}$ @ $T_{j,max}$	700V
$I_{DM}$	152A
$R_{DS(ON),max}$	< 0.095Ω
$Q_{g,typ}$	78nC
$E_{oss}$ @ 400V	7.8μJ

100% UIS Tested  
100%  $R_g$  Tested



Orderable Part Number	Package Type	Form	Minimum Order Quantity
AOK095A60	TO-247	Tube	240

### Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	$V_{DS}$	600	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Gate-Source Voltage (dynamic) AC( $f > 1\text{Hz}$ )	$V_{GS}$	$\pm 30$	V
Continuous Drain Current	$I_D$	38	A
$T_C=100^\circ\text{C}$	$I_D$	24	
Pulsed Drain Current <sup>C</sup>	$I_{DM}$	152	
Avalanche Current <sup>C</sup>	$I_{AR}$	11	A
Repetitive avalanche energy <sup>C</sup>	$E_{AR}$	60	mJ
Single pulsed avalanche energy <sup>G</sup>	$E_{AS}$	480	mJ
MOSFET dv/dt ruggedness	dv/dt	100	V/ns
Diode reverse recovery	dv/dt	20	V/ns
$V_{DS}=0$ to $400\text{V}$ , $I_F \leq 20\text{A}$ , $T_j=25^\circ\text{C}$	di/dt	500	A/us
Power Dissipation <sup>B</sup>	$P_D$	378	W
Derate above $25^\circ\text{C}$	$P_D$	3.0	W/°C
Junction and Storage Temperature Range	$T_J$ , $T_{STG}$	-55 to 150	°C
Maximum lead temperature for soldering purpose, 1/8" from case for 5 seconds	$T_L$	300	°C

### Thermal Characteristics

Parameter	Symbol	Maximum	Units
Maximum Junction-to-Ambient <sup>A,D</sup>	$R_{\theta JA}$	40	°C/W
Maximum Case-to-sink <sup>A</sup>	$R_{\theta CS}$	0.5	°C/W
Maximum Junction-to-Case	$R_{\theta JC}$	0.33	°C/W

**Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
$BV_{DSS}$	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}, T_J=25^\circ\text{C}$	600			V
		$I_D=250\mu\text{A}, V_{GS}=0\text{V}, T_J=150^\circ\text{C}$		700		
$BV_{DSS}/\Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$		0.51		$\text{V}/^\circ\text{C}$
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=600\text{V}, V_{GS}=0\text{V}$			1	$\mu\text{A}$
		$V_{DS}=480\text{V}, T_J=125^\circ\text{C}$			10	
$I_{GSS}$	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm 20\text{V}$			$\pm 100$	nA
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=5\text{V}, I_D=250\mu\text{A}$	2.4	3	3.6	V
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=19\text{A}$		0.082	0.095	$\Omega$
$g_{FS}$	Forward Transconductance	$V_{DS}=10\text{V}, I_D=19\text{A}$		25		S
$V_{SD}$	Diode Forward Voltage	$I_S=19\text{A}, V_{GS}=0\text{V}$		0.86	1.2	V
$I_S$	Maximum Body-Diode Continuous Current				38	A
$I_{SM}$	Maximum Body-Diode Pulsed Current <sup>C</sup>				152	A
<b>DYNAMIC PARAMETERS</b>						
$C_{iss}$	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=100\text{V}, f=1\text{MHz}$		4010		pF
$C_{oss}$	Output Capacitance			105		pF
$C_{o(er)}$	Effective output capacitance, energy related <sup>H</sup>	$V_{GS}=0\text{V}, V_{DS}=0 \text{ to } 480\text{V}, f=1\text{MHz}$		90		pF
$C_{o(tr)}$	Effective output capacitance, time related <sup>I</sup>			390		pF
$C_{rss}$	Reverse Transfer Capacitance	$V_{GS}=0\text{V}, V_{DS}=100\text{V}, f=1\text{MHz}$		1.2		pF
$R_g$	Gate resistance	$f=1\text{MHz}$		5.5		$\Omega$
<b>SWITCHING PARAMETERS</b>						
$Q_g$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=480\text{V}, I_D=19\text{A}$		78		nC
$Q_{gs}$	Gate Source Charge			28		nC
$Q_{gd}$	Gate Drain Charge			24		nC
$t_{D(on)}$	Turn-On DelayTime	$V_{GS}=10\text{V}, V_{DS}=400\text{V}, I_D=19\text{A}, R_G=5\Omega$		48		ns
$t_r$	Turn-On Rise Time			50		ns
$t_{D(off)}$	Turn-Off DelayTime			99		ns
$t_f$	Turn-Off Fall Time			33		ns
$t_{rr}$	Body Diode Reverse Recovery Time	$I_F=19\text{A}, dI/dt=100\text{A}/\mu\text{s}, V_{DS}=400\text{V}$		444		ns
$I_{rm}$	Peak Reverse Recovery Current			36		A
$Q_{rr}$	Body Diode Reverse Recovery Charge			11.5		$\mu\text{C}$

A. The value of  $R_{\text{aja}}$  is measured with the device in a still air environment with  $T_A=25^\circ\text{C}$ .

B. The power dissipation  $P_0$  is based on  $T_{J(\text{MAX})}=150^\circ\text{C}$ , using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature  $T_{J(\text{MAX})}=150^\circ\text{C}$ . Ratings are based on low frequency and duty cycles to keep initial  $T_J=25^\circ\text{C}$ .

D. The  $R_{\text{aja}}$  is the sum of the thermal impedance from junction to case  $R_{\text{jJC}}$  and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using  $<300\mu\text{s}$  pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink  $k$ , assuming a maximum junction temperature of  $T_{J(\text{MAX})}=150^\circ\text{C}$ . The SOA curve provides a single pulse rating.

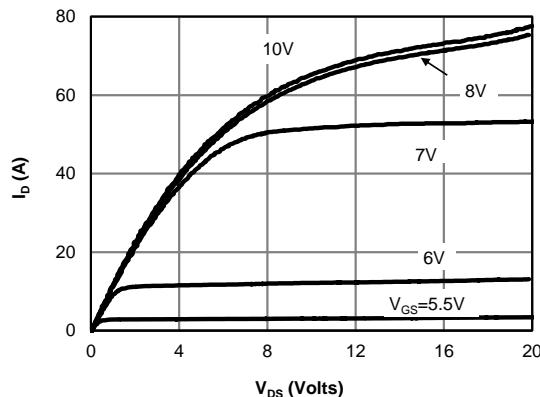
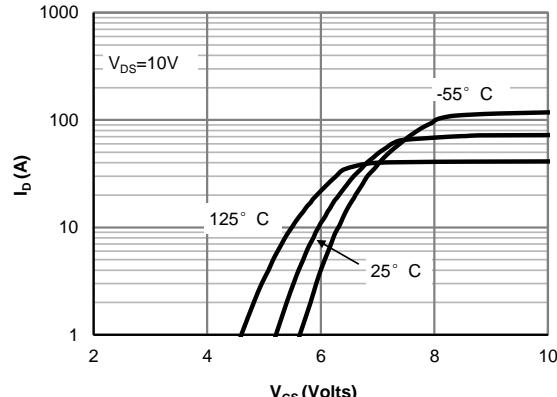
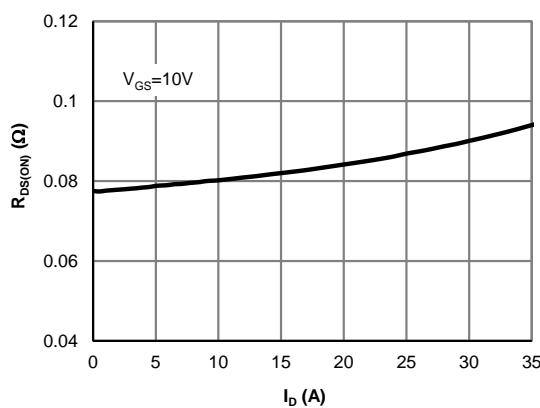
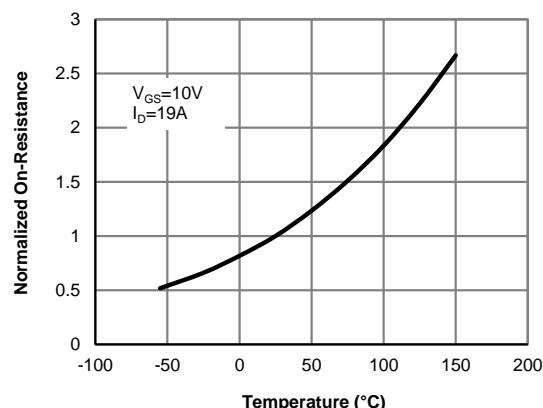
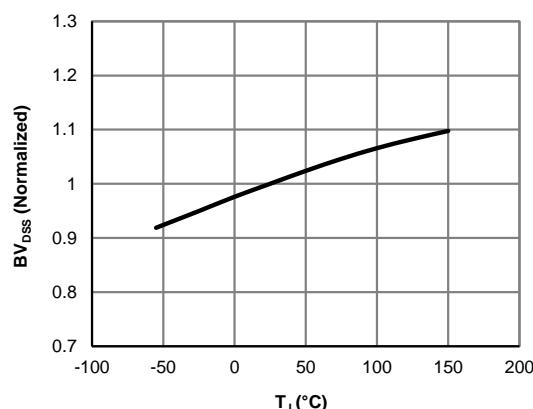
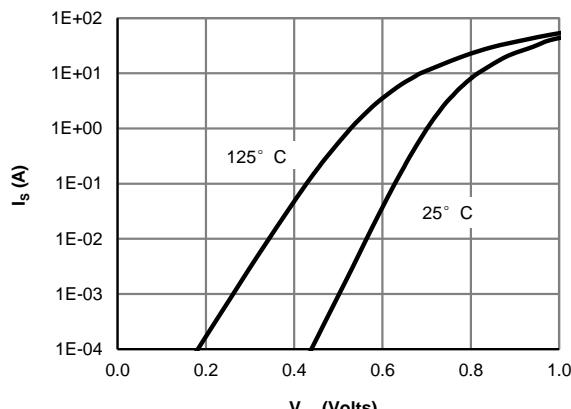
G.  $L=60\text{mH}, I_{AS}=4\text{ A}, R_G=25\Omega$ , Starting  $T_J=25^\circ\text{C}$ .

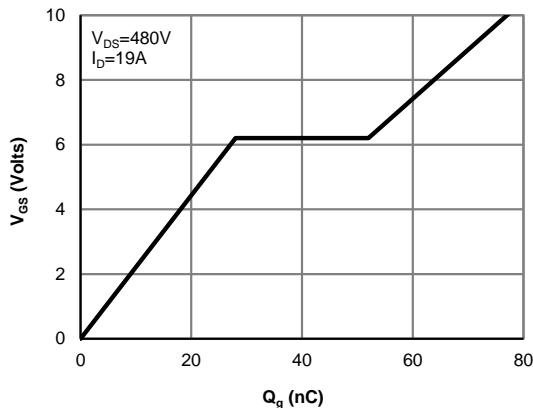
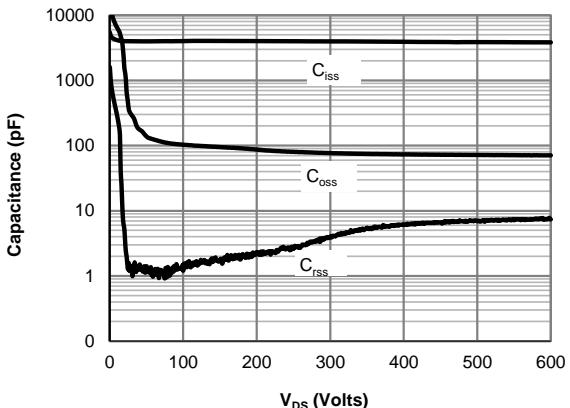
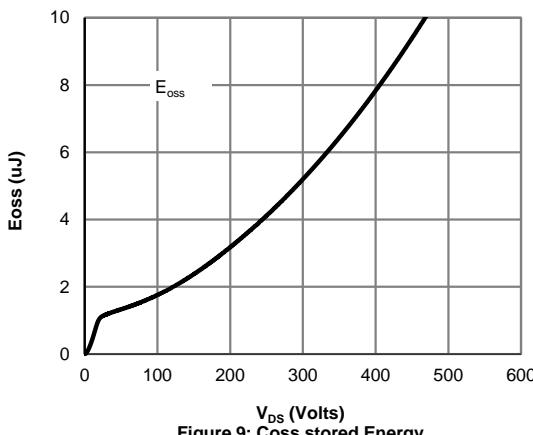
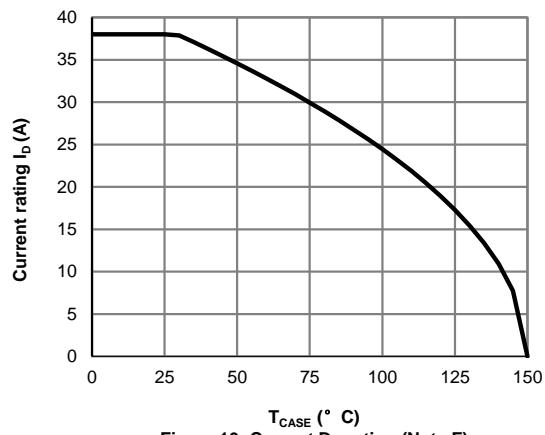
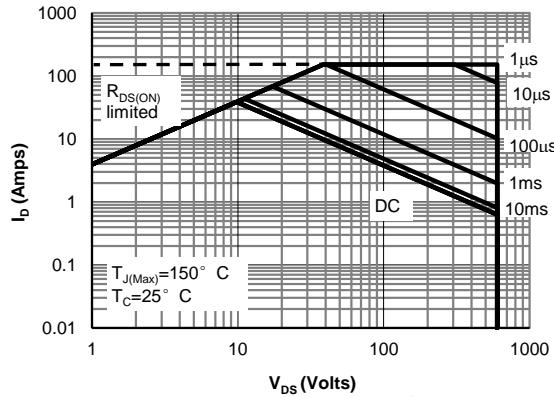
H.  $C_{o(er)}$  is a fixed capacitance that gives the same stored energy as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{(BR)DSS}$ .

I.  $C_{o(tr)}$  is a fixed capacitance that gives the same charging time as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{(BR)DSS}$ .

APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO MAKE CHANGES TO PRODUCT SPECIFICATIONS WITHOUT NOTICE. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO EVALUATE SUITABILITY OF THE PRODUCT FOR THEIR INTENDED APPLICATION. CUSTOMER SHALL COMPLY WITH APPLICABLE LEGAL REQUIREMENTS, INCLUDING ALL APPLICABLE EXPORT CONTROL RULES, REGULATIONS AND LIMITATIONS.

AOS' products are provided subject to AOS' terms and conditions of sale which are set forth at:  
[http://www.aosmd.com/terms\\_and\\_conditions\\_of\\_sale](http://www.aosmd.com/terms_and_conditions_of_sale)

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

**Figure 1: On-Region Characteristics**

**Figure 2: Transfer Characteristics**

**Figure 3: On-Resistance vs. Drain Current and Gate Voltage**

**Figure 4: On-Resistance vs. Junction Temperature**

**Figure 5: Break Down vs. Junction Temperature**

**Figure 6: Body-Diode Characteristics**

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

**Figure 7: Gate-Charge Characteristics**

**Figure 8: Capacitance Characteristics**

**Figure 9: Coss stored Energy**

**Figure 10: Current De-rating (Note F)**

**Figure 11: Maximum Forward Biased Safe Operating Area for AOK095A60 (Note F)**

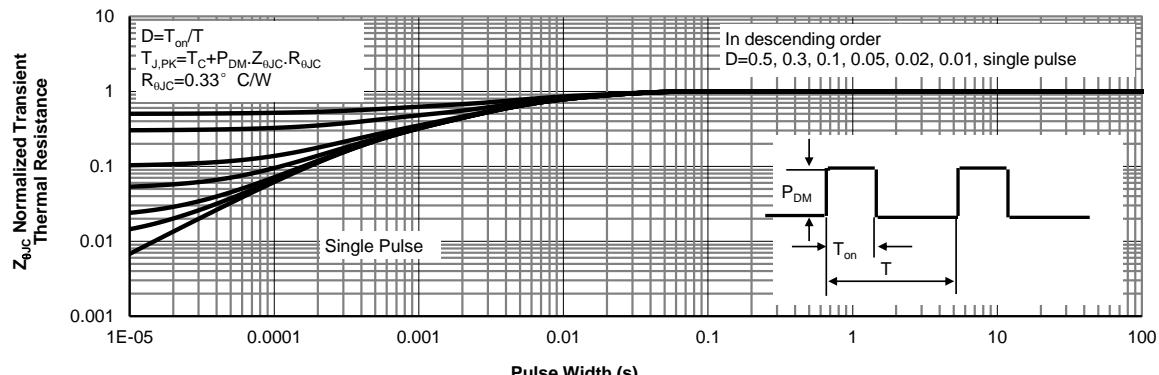
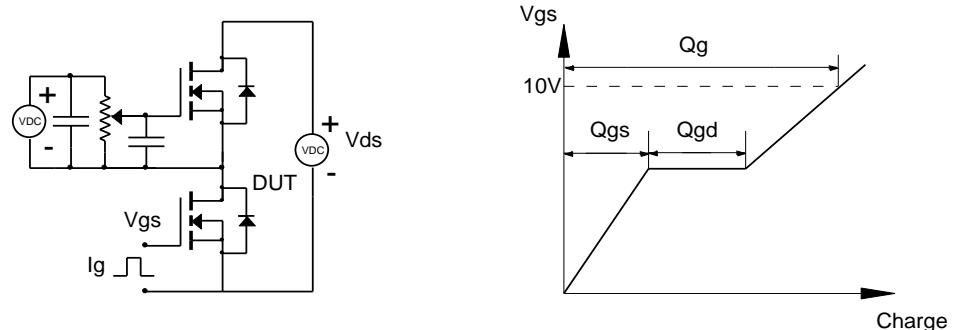
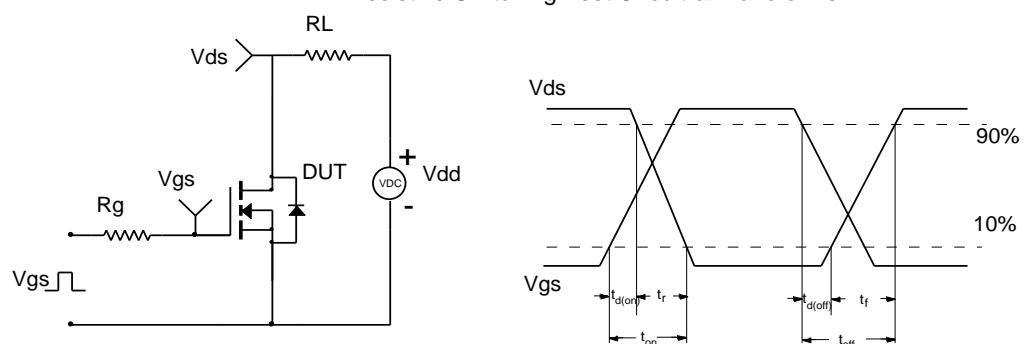
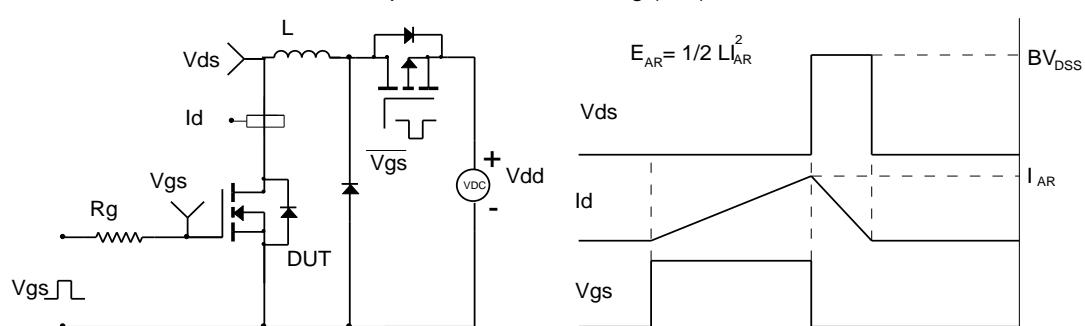
**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**


Figure 12: Normalized Maximum Transient Thermal Impedance for AOK095A60 (Note F)

**Gate Charge Test Circuit & Waveform**

**Resistive Switching Test Circuit & Waveforms**

**Unclamped Inductive Switching (UIS) Test Circuit & Waveforms**

**Diode Recovery Test Circuit & Waveforms**
