

P-Channel Power MOSFET**描述 / Descriptions**

SOT23 塑封封装 P 道 MOS 场效应管。

P- CHANNEL MOSFET in a SOT23 Plastic Package.

特征 / Features

$R_{DS(ON)} < 41\text{ m}\Omega, V_{GS} = -4.5\text{V}$

$R_{DS(ON)} < 53\text{ m}\Omega, V_{GS} = -2.5\text{V}$


无卤产品。HF Product.

ESD

用途 / Applications

负载开关，电池保护。

Load switch , Battery protection.

内部等效电路 / Equivalent Circuit**引脚排列 / Pinning**

PIN1 : G

PIN 2 : S

PIN 3 : D

印章代码 / Marking

Marking	3415E
---------	-------

P-Channel Power MOSFET

极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 10	V
Drain Current-Continuous @ $T_C = 25^\circ\text{C}$	I_D	-4	A
Drain Current-Pulsed Note1 @ $T_C = 25^\circ\text{C}$	I_{DM}	-24	A
Maximum Power Dissipation	P_D	1.25	W
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$
Operating Junction Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient Note2	$R_{\theta JA}$	100	$^\circ\text{C/W}$

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	$B_{V_{DS}}$	$V_{GS}=0V$ $I_{DS}=-250\mu A$	-20			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-20V$ $V_{GS}=0V$			-1	μA
Gate-Body Leakage	I_{GSS}	$V_{GS}=\pm 8V$ $V_{DS}=0V$			± 10	μA
Gate Threshold Voltage	V_{TH}	$V_{DS}=V_{GS}$ $I_{DS}=-250\mu A$	-0.3	-0.8	-1.2	V
Drain-Source On-State Resistance	R_{DS}	$V_{GS}=-4.5V$ $I_{DS}=-4A$		35	41	$m\Omega$
		$V_{GS}=-2.5V$ $I_{DS}=-3A$		55	65	
Input Capacitance	C_{iss}	$V_{DS}=-10V$ $V_{GS}=0V$ $f=1MHz$		750		pF
Output Capacitance	C_{oss}			110		
Reverse Transfer Capacitance	C_{rss}			80		
Turn-On Delay Time	$t_{d(on)}$	$V_{DS}=-10V$ $V_{GS}=-4.5V$ $R_G=3$ $R_L=2.5$		15.6		ns
Rise Time	t_r			11.2		
Turn-Off Delay Time	$t_{d(off)}$			23.1		
Fall Time	t_f			32.7		
Total Gate Charge at 10V	Q_g	$V_{DS}=-10V$ $I_{DS}=-4A$ $V_{GS}=-4.5V$		10		nC
Gate to Source Gate Charge	Q_{gs}			1.5		
Gate to Drain "Miller" Charge	Q_{gd}			2.2		
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_{DS}=-1A$		-0.7		V

Notes:

1. Pulse Test: Pulse Width 300 μs , Duty Cycle 2%.
2. $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta JC}$ is guaranteed by design while $R_{\theta CA}$ is determined by the user's board design. $R_{\theta JA}$ shown below for single device operation on FR-4 in still air.

P-Channel Power MOSFET

电参数曲线图 / Electrical Characteristic Curve

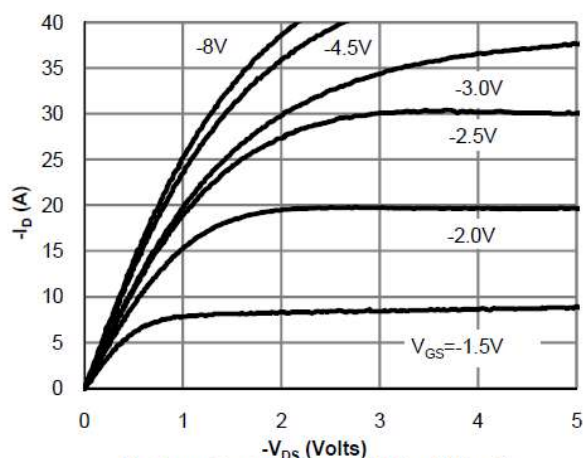


Fig 1: On-Region Characteristics (Note E)

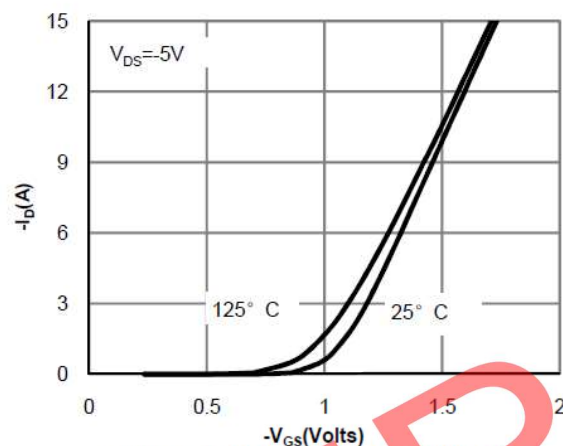


Figure 2: Transfer Characteristics (Note E)

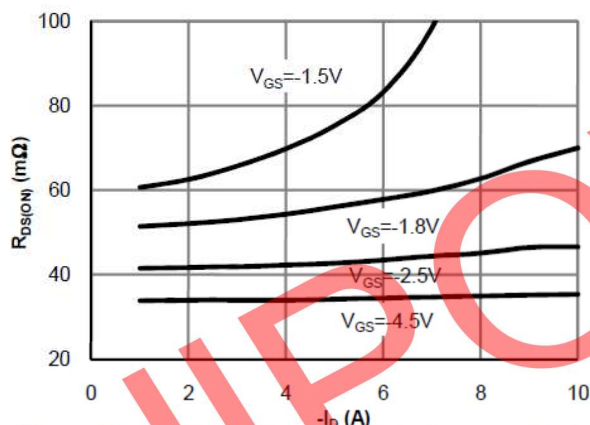


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

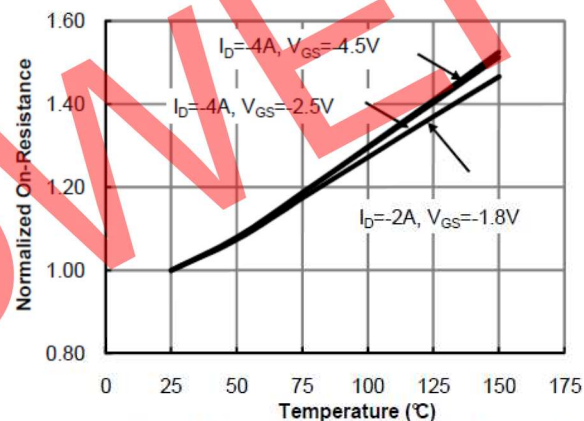


Figure 4: On-Resistance vs. Junction Temperature (Note E)

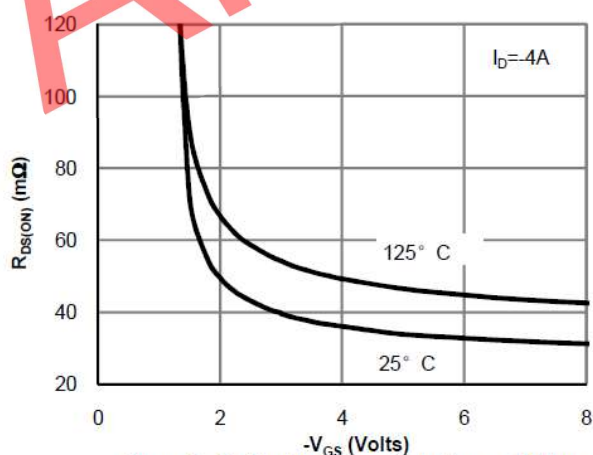


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

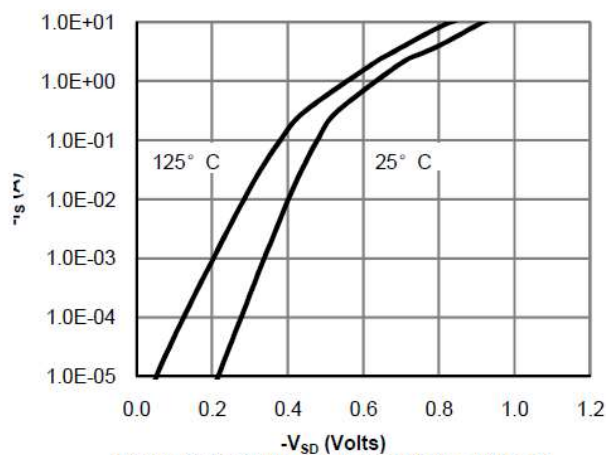



Figure 6: Body-Diode Characteristics (Note E)

P-Channel Power MOSFET

外形尺寸图 / Package Dimensions

SOT-23

单位: mm

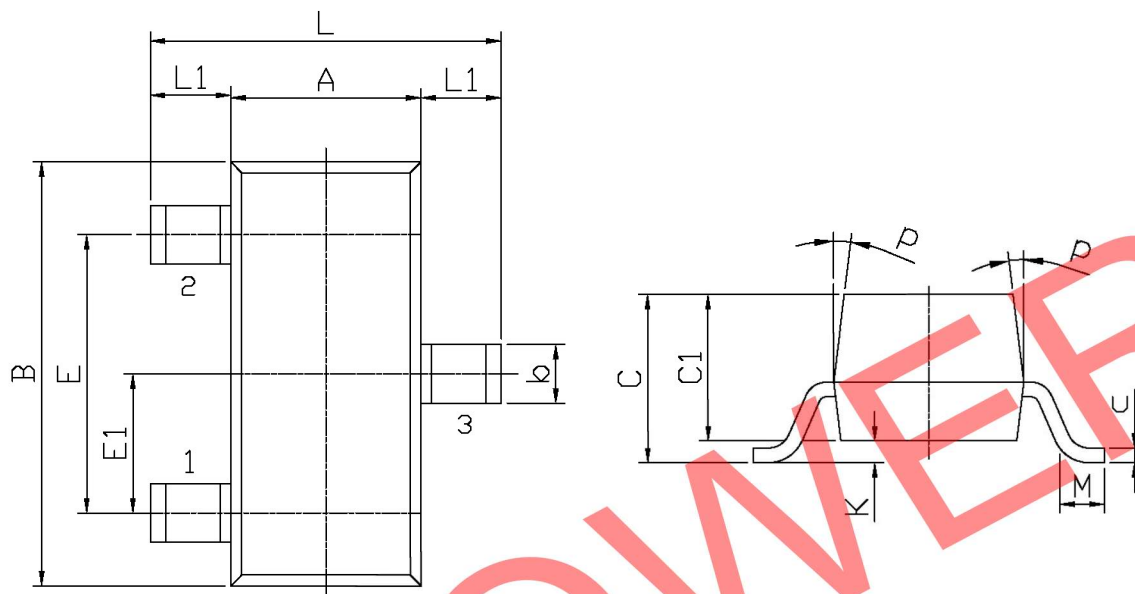

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30Max	
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
B	2.70	3.10	K	0	0.10
E	1.70	2.10	M	0.20MIN	
E1	0.85	1.05	P	7°	
b	0.35	0.55			