




## N-channel Enhancement-mode Power MOSFET

**Fast Switching Characteristics**

**Low Gate Charge**

**Simple Drive Requirement**

**RoHS-compliant, halogen-free**




$BV_{DSS}$	600V
$R_{DS(ON)}$	5Ω
$I_D$	400mA

## Description

Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, low on-resistance and cost-effectiveness.

The AP4002T-3 is in the popular TO-92 small through-hole package which is widely used in commercial and industrial applications where a small board footprint is required.

This device is well suited for use in low current applications such as small switching power supplies and load switches.

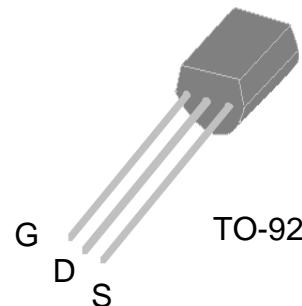

## Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	600	V
$V_{GS}$	Gate-Source Voltage	$\pm 30$	V
$I_D$ at $T_L=25^\circ\text{C}$	Continuous Drain Current	400	mA
$I_{DM}$	Pulsed Drain Current <sup>1</sup>	3	A
$P_D$ at $T_L=25^\circ\text{C}$	Total Power Dissipation	2	W
	Linear Derating Factor	0.017	W/°C
$E_{AS}$	Single Pulse Avalanche Energy <sup>2</sup>	20	mJ
$I_{AR}$	Avalanche Current	2	A
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$T_J$	Operating Junction Temperature Range	-55 to 150	°C

## Thermal Data

Symbol	Parameter	Value	Unit
$R_{thj-a}$	Maximum Thermal Resistance, Junction-ambient	150	°C/W
$R_{thj-l}$	Maximum Thermal Resistance, Junction-lead	60	°C/W

## Ordering Information

AP4002T-HF-3AP : in RoHS-compliant halogen-free TO-92, shipped on Ammopak, 2000pcs/reel



**Electrical Specifications at  $T_j=25^\circ\text{C}$  (unless otherwise specified)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$ , $I_D=1\text{mA}$	600	-	-	V
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=10\text{V}$ , $I_D=400\text{mA}$	-	-	5	$\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}$ , $I_D=250\text{\mu A}$	2	-	4	V
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=10\text{V}$ , $I_D=400\text{mA}$	-	570	-	$\text{mS}$
$I_{\text{DSS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=600\text{V}$ , $V_{\text{GS}}=0\text{V}$	-	-	100	$\text{\mu A}$
$I_{\text{GSS}}$	Gate-Source Leakage	$V_{\text{GS}}=\pm 30\text{V}$	-	-	$\pm 1$	$\text{\mu A}$
$Q_g$	Total Gate Charge <sup>3</sup>	$I_D=2\text{A}$	-	12	19	$\text{nC}$
$Q_{\text{gs}}$	Gate-Source Charge	$V_{\text{DS}}=480\text{V}$	-	2	-	$\text{nC}$
$Q_{\text{gd}}$	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=10\text{V}$	-	5.5	-	$\text{nC}$
$t_{\text{d(on)}}$	Turn-on Delay Time <sup>3</sup>	$V_{\text{DD}}=200\text{V}$	-	10	-	ns
$t_r$	Rise Time	$I_D=1\text{A}$	-	12	-	ns
$t_{\text{d(off)}}$	Turn-off Delay Time	$R_G=50\Omega$ , $V_{\text{GS}}=10\text{V}$	-	52	-	ns
$t_f$	Fall Time	$R_D=200\Omega$	-	19	-	ns
$C_{\text{iss}}$	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	375	600	$\text{pF}$
$C_{\text{oss}}$	Output Capacitance	$V_{\text{DS}}=10\text{V}$	-	170	-	$\text{pF}$
$C_{\text{rss}}$	Reverse Transfer Capacitance	f=1.0MHz	-	45	-	$\text{pF}$

**Source-Drain Diode**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{\text{SD}}$	Forward On Voltage <sup>3</sup>	$T_j=25^\circ\text{C}$ , $I_S=2\text{A}$ , $V_{\text{GS}}=0\text{V}$	-	-	1.5	V
$t_{\text{rr}}$	Reverse Recovery Time <sup>3</sup>	$I_S=2\text{A}$ , $V_{\text{GS}}=0\text{V}$	-	340	-	ns
$Q_{\text{rr}}$	Reverse Recovery Charge	$dI/dt=100\text{A}/\mu\text{s}$	-	2.2	-	$\text{\mu C}$

**Notes:**

1. Pulse width limited by maximum junction temperature.

2. Starting  $T_j=25^\circ\text{C}$ ,  $V_{\text{DD}}=50\text{V}$ ,  $L=10\text{mH}$ ,  $R_G=25\Omega$

3. Pulse test

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE



## Typical Electrical Characteristics

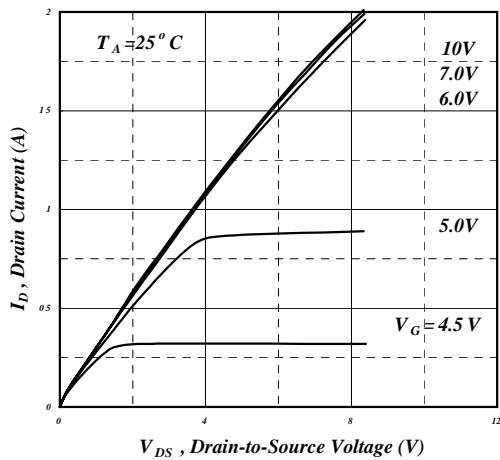


Fig 1. Typical Output Characteristics

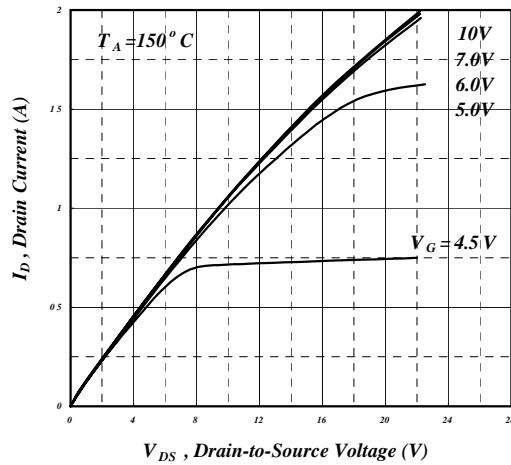


Fig 2. Typical Output Characteristics

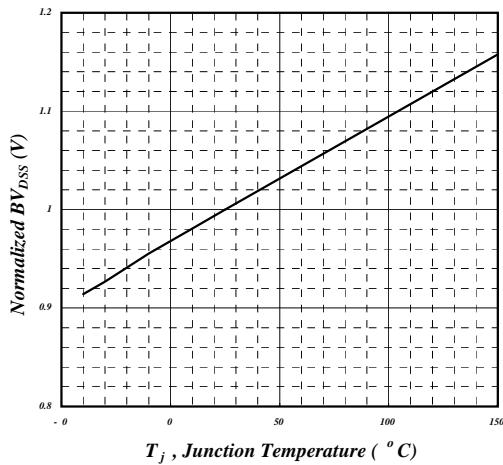


Fig 3. Normalised  $BV_{DSS}$  vs.  
Junction Temperature

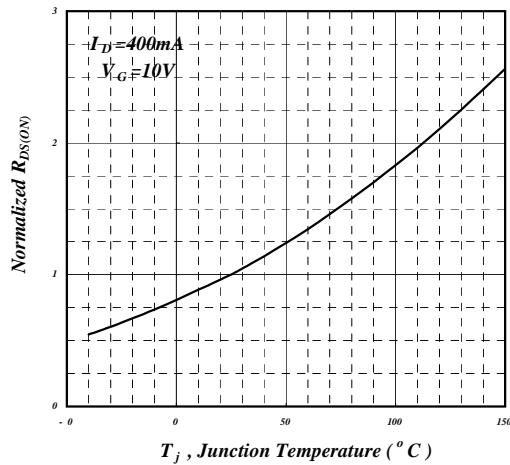


Fig 4. Normalized On-Resistance  
vs. Junction Temperature

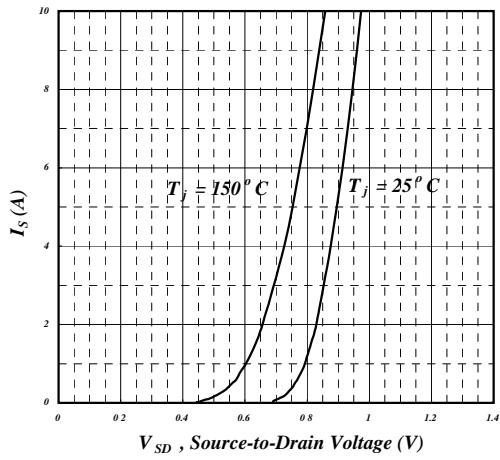


Fig 5. Forward Characteristic of  
Reverse Diode

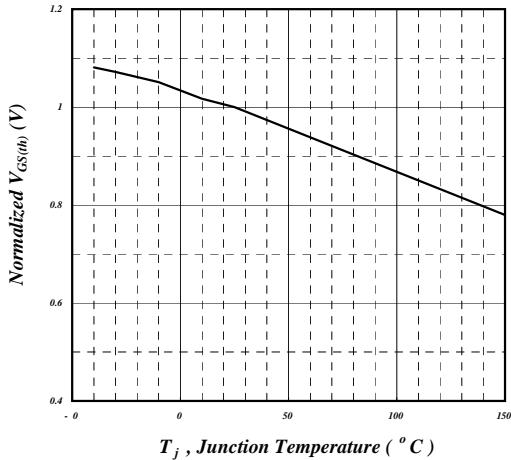


Fig 6. Gate Threshold Voltage vs.  
Junction Temperature



## Typical Electrical Characteristics (cont.)

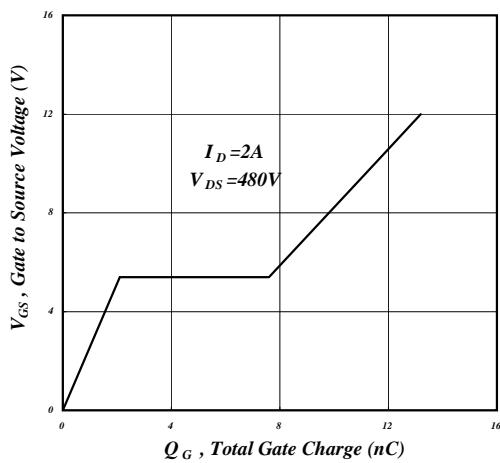


Fig 7. Gate Charge Characteristics

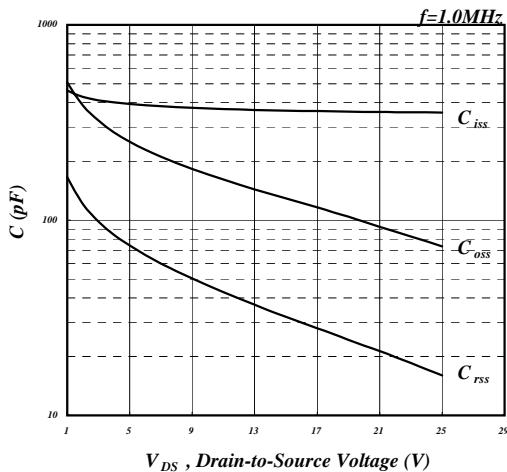


Fig 8. Typical Capacitance Characteristics

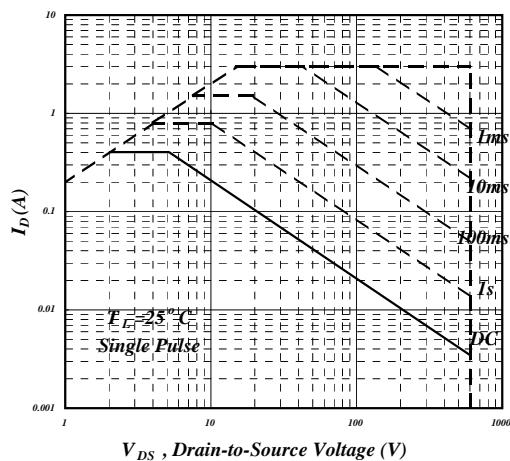


Fig 9. Maximum Safe Operating Area

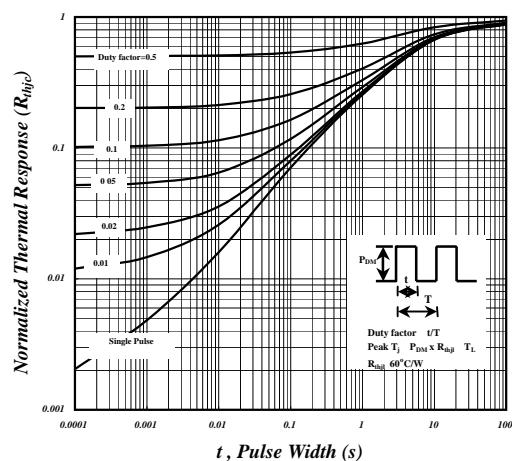


Fig 10. Effective Transient Thermal Impedance

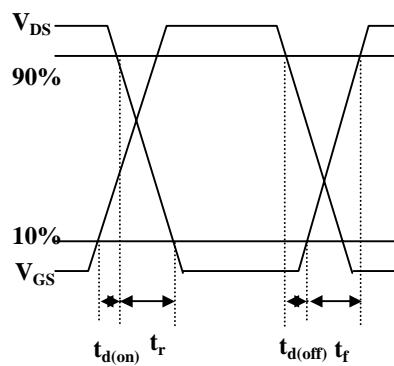


Fig 11. Switching Time Waveform


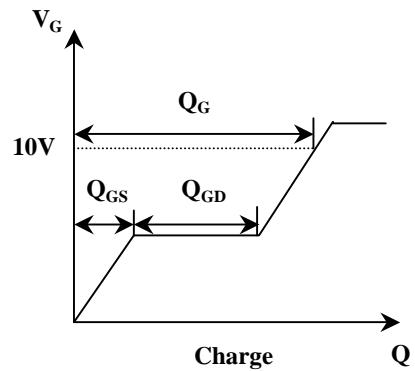


Fig 12. Gate Charge Waveform



## Package Dimensions: TO-92

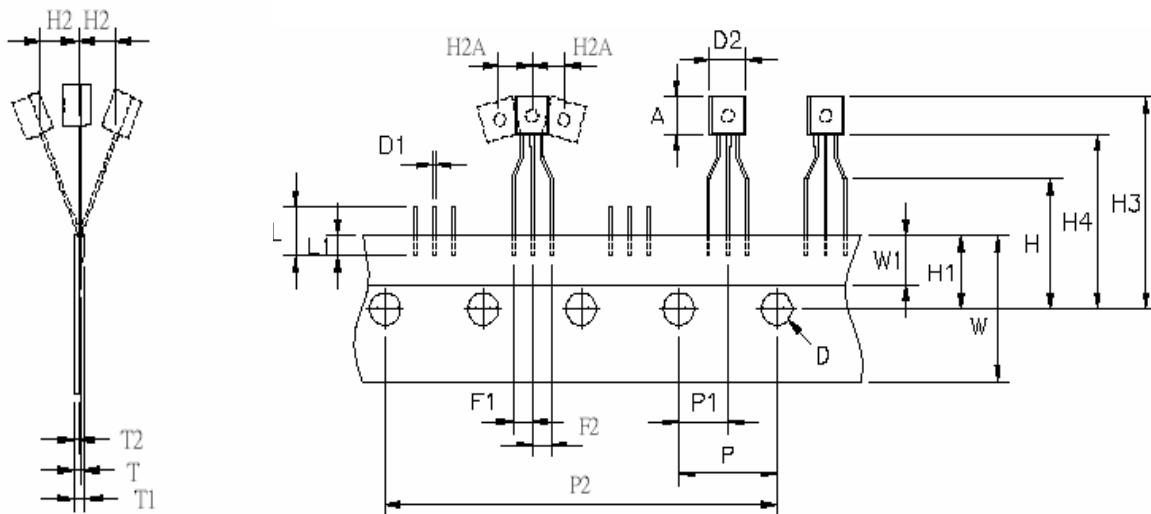

SYMBOL	A	D	D1	D2	F1,F2	F1-F2	H	H1
mm	3.18~12	4.0±0.2	0.36~0.53	9.0 max.	2.5 <sup>+0.2</sup> <sub>-0.1</sub>	±0.30	16±0.5	9±0.5
SYMBOL	H2	H2A	H3	H4	L	L1	P	P1
mm	1 max.	1 max.	27 max.	21 max.	11 max.	2.5 min.	12.7±0.2	5.95~6.75
SYMBOL	P2	T	T1	T2	W	W1		
mm	50.3~51.30	0.55 max.	1.42 max.	0.38~0.68	17.5~19.0	5.0~7.0		

1. All dimensions are in millimeters.

2. Dimensions do not include mold protrusions.

## Marking Information:

