





General Description

The Z9435 is the P-Channel logic enhancement mode power field effect transistors, using high cell density, DMOS trench technology. This high density process is especially tailored to minimize on-state resistance. These devices are particularly suited for low voltage application such as cellular phone, notebook computer power management and other battery powered circuits, and low in-line power loss that are needed in a very small outline surface mount package.

Product Summary

V_{DS}	-30V
I_D (at $V_{GS}=20V$)	-5.3A
$R_{DS(ON)}$ (at $V_{GS}=-10V$)	< 55mΩ
$R_{DS(ON)}$ (at $V_{GS}=-4.5V$)	< 90mΩ

● **Pin Configuration**



Absolute Maximum Ratings $T_A=25^{\circ}C$ unless otherwise noted







Parameter	Symbol	Limits	Units
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	20	V
Continuous Drain Current	I_D	-5.3	A
Pulsed Drain Current ¹⁾	I_{DM}	-20	
Maximum Power Dissipation	P_D	$T_A=25$	W
		$T_A=70$	
Operating Junction Temperature	T_J	-55 to 150	$^{\circ}C$
Junction-to-Case Thermal Resistance	R_{JC}	30	/W
Junction-to-Ambient Thermal Resistance (PCB mounted) ²⁾	R_{JA}	50	/W



● **Electrical Characteristics** @ $T_A=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC						
B_{VDSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\text{ A}$	-30			V
$R_{DS(ON)}$	Drain-Source On-Resistance	$V_{GS} = -10V, I_D = -5.3A$		55	60	m Ω
		$V_{GS} = -4.5V, I_D = -4.2A$		90	100	
$V_{GS(th)}$	Gate-Threshold Voltage	$V_{GS} = V_{GS}, I_D = -250\text{ A}$	-1.0	-2.2	-3.0	V
I_{GSS}	Gate-Body Leakage	$V_{GS} = +20V, V_{DS} = 0V$			+100	nA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = -24V, V_{GS} = 0V$			-1	A
g_{FS}	Forward Transconductance	$V_{DS} = -15V, I_D = -5.3A$	4	7		S
DYNAMIC						
Q_g	Total Gate Charge	$V_{DS} = -15V, I_D = -5.3A, V_{GS} = -10V$		9.52		nC
Q_{gs}	Gate-Source Charge			3.43		
Q_{gd}	Gate-Drain Charge			1.71		
$t_{D(on)}$	Turn-On Delay Time	$V_{DD} = -15V, R_L = 15\ \Omega, I_D = -1A,$ $V_{GEN} = -10V, R_G = 6\ \Omega$		34.5		ns
t_r	Turn-On Rise Time			18.6		
$t_{D(off)}$	Turn-Off Delay Time			37.1		
t_f	Turn-Off Fall Time			3.1		




● **Typical Performance Characteristics**

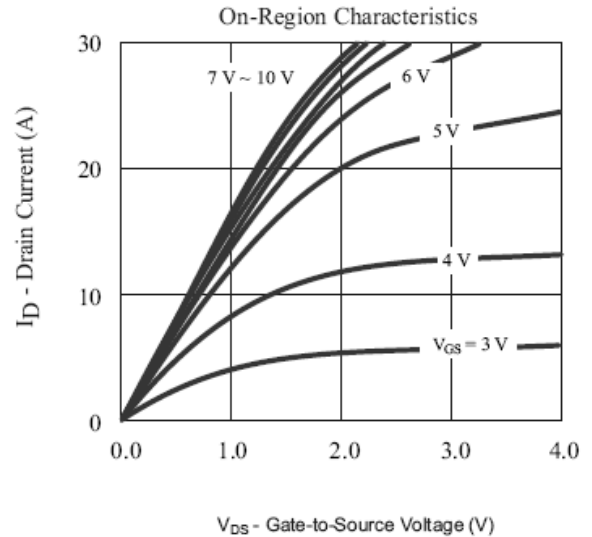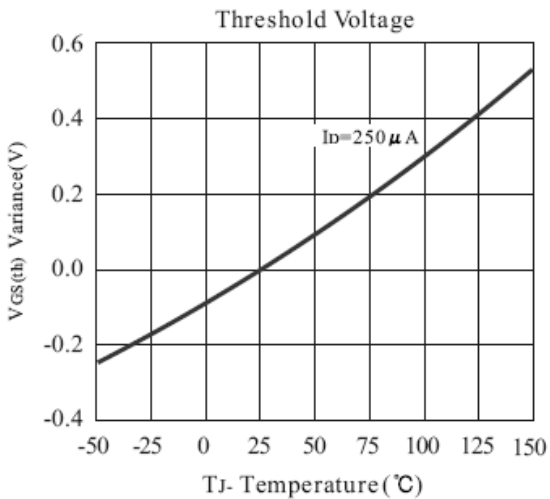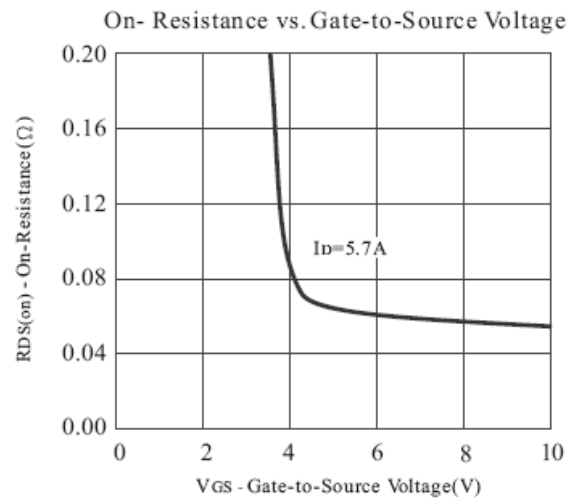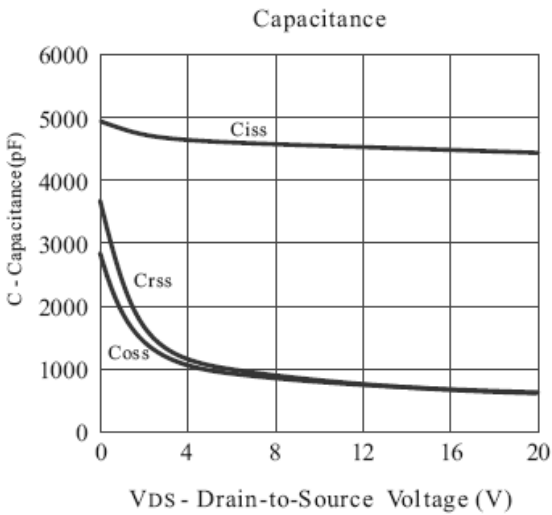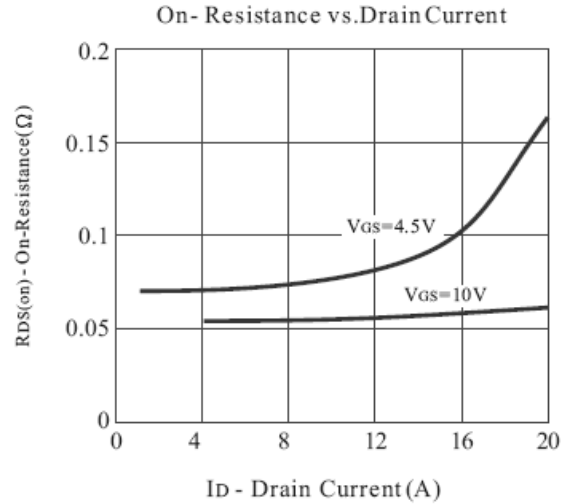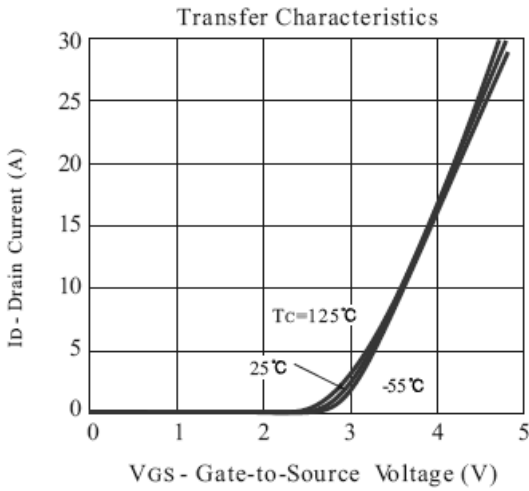

- **Package Information**

Physical Dimensions inches(millimeters) unless otherwise noted

SOP-8

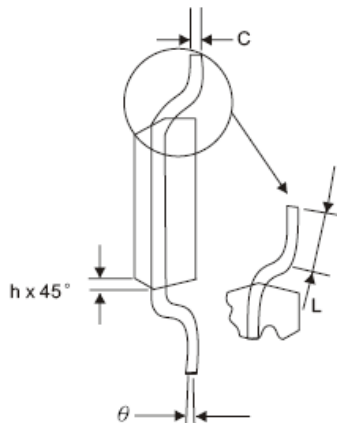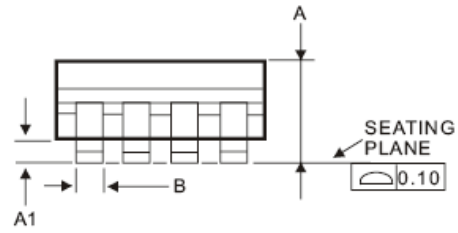

DIM	MILLIMETERS	
	MIN	MAX
A	1.35	1.75
A1	0.10	0.25
B	0.35	0.49
C	0.18	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27 BSC	
H	5.80	6.20
h	0.25	0.50
L	0.40	1.25
θ	0°	7°

DISCLAIMER

ZHENYANG GROUP CO,LTD RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. ZHENYANG DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.